
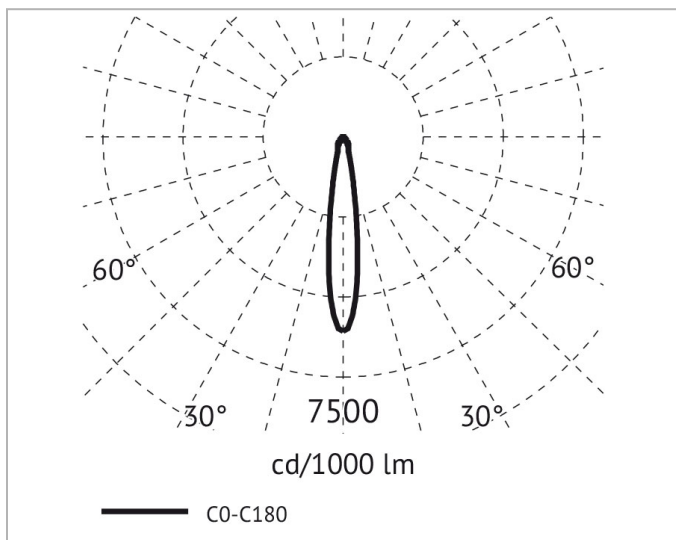


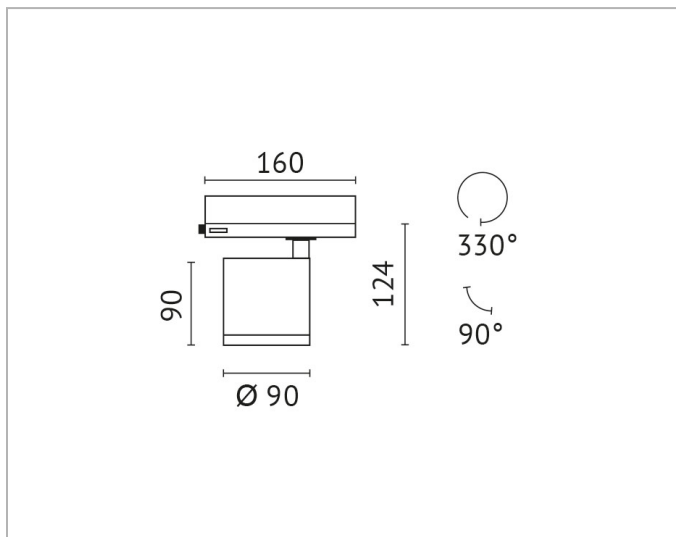

## Description

MIN, Spotlight for contact tracks, CoB LED, 17W, 4000K COB, CRI >90, with 3-phase-electronic adapter, incl. power supply integrated in adapter, 15° beam angle, clear tempered glass, body white

## General data

|                                           |                         |
|-------------------------------------------|-------------------------|
| <b>Adjustability:</b>                     | Rotating and swivelling |
| <b>Colour housing:</b>                    | White                   |
| <b>Degree of protection (IP):</b>         | IP20                    |
| <b>Lamp holder:</b>                       | None                    |
| <b>Material housing:</b>                  | Aluminium               |
| <b>Protection class:</b>                  | II                      |
| <b>Suitable for light-track mounting:</b> | Yes                     |

## Photometric data

|                                                        |                      |
|--------------------------------------------------------|----------------------|
| <b>Beam angle:</b>                                     | Narrow beam 11 - 20° |
| <b>Colour consistency (McAdam ellipse):</b>            | SDCM3                |
| <b>Colour of light:</b>                                | White                |
| <b>Colour rendering index CRI:</b>                     | 90-100               |
| <b>Colour temperature:</b>                             | 4000K                |
| <b>Light outlet:</b>                                   | Direct               |
| <b>Light sharing:</b>                                  | Symmetric            |
| <b>Luminaire efficacy:</b>                             | 139lm/W              |
| <b>Luminous flux:</b>                                  | 2381lm               |
| <b>Max. system power:</b>                              | 17W                  |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 2381lm               |
| <b>Suitable for number of lamps:</b>                   | 1                    |

## Electrical data

|                                   |                |
|-----------------------------------|----------------|
| <b>Connection type:</b>           | Busbar adapter |
| <b>Exchangeable control gear:</b> | Yes            |



## Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de



|                           |             |
|---------------------------|-------------|
| <b>No dim function:</b>   | Yes         |
| <b>Nominal voltage:</b>   | 220V - 240V |
| <b>Voltage type:</b>      | AC          |
| <b>With control gear:</b> | Yes         |

**Product dimensions**

|                        |       |
|------------------------|-------|
| <b>Height/depth:</b>   | 164mm |
| <b>Length:</b>         | 255mm |
| <b>Outer diameter:</b> | 90mm  |
| <b>Width:</b>          | 95mm  |

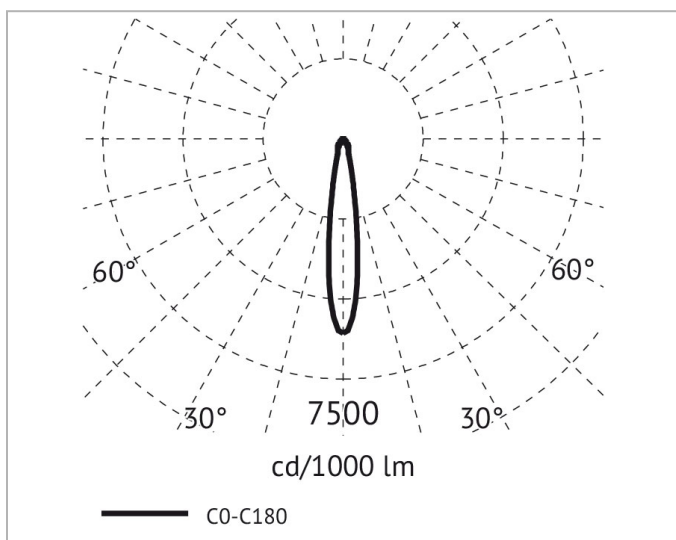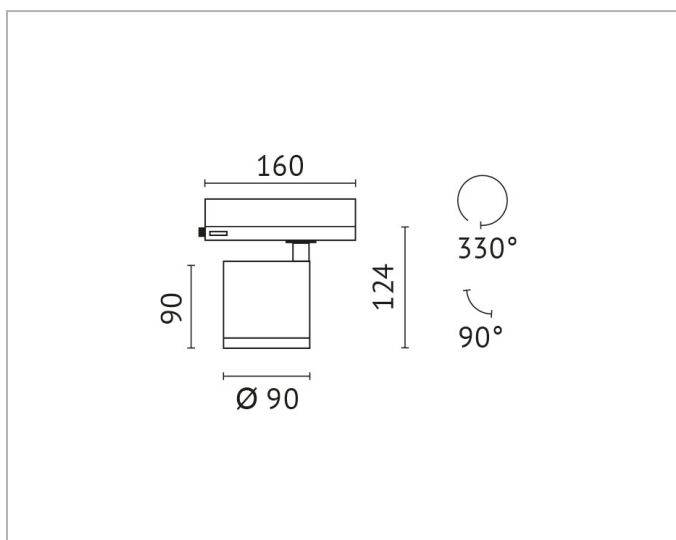

**Adress/Contact**