



## Description

MIN, Spotlight for contact tracks, CoB LED, 17W, DALI, 3500K COB, CRI >90, with 3-phase-electronic adapter, incl. power supply integrated in adapter, 60° beam angle, clear tempered glass, body black

## General data



|                                           |                         |
|-------------------------------------------|-------------------------|
| <b>Adjustability:</b>                     | Rotating and swivelling |
| <b>Colour housing:</b>                    | Black                   |
| <b>Degree of protection (IP):</b>         | IP20                    |
| <b>Lamp holder:</b>                       | None                    |
| <b>Material housing:</b>                  | Aluminium               |
| <b>Protection class:</b>                  | II                      |
| <b>Suitable for light-track mounting:</b> | Yes                     |

## Photometric data

|                                                        |                  |
|--------------------------------------------------------|------------------|
| <b>Beam angle:</b>                                     | Wide beam 41-80° |
| <b>Colour consistency (McAdam ellipse):</b>            | SDCM3            |
| <b>Colour of light:</b>                                | White            |
| <b>Colour rendering index CRI:</b>                     | 90-100           |
| <b>Colour temperature:</b>                             | 3500K            |
| <b>Light outlet:</b>                                   | Direct           |
| <b>Light sharing:</b>                                  | Symmetric        |
| <b>Luminaire efficacy:</b>                             | 136lm/W          |
| <b>Luminous flux:</b>                                  | 2330lm           |
| <b>Max. system power:</b>                              | 17W              |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 2330lm           |
| <b>Suitable for number of lamps:</b>                   | 1                |

## Electrical data

|                         |                |
|-------------------------|----------------|
| <b>Connection type:</b> | Busbar adapter |
| <b>Dimming DALI:</b>    | Yes            |

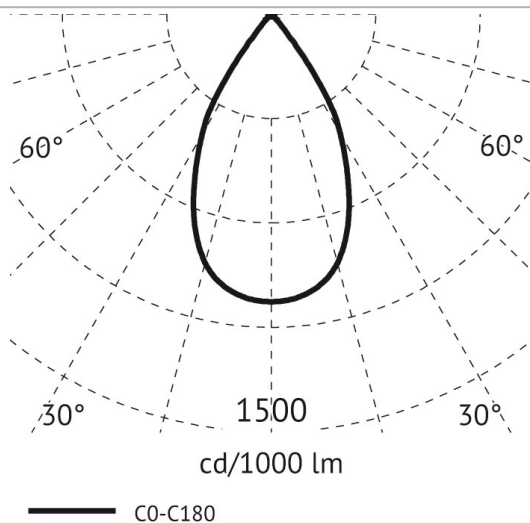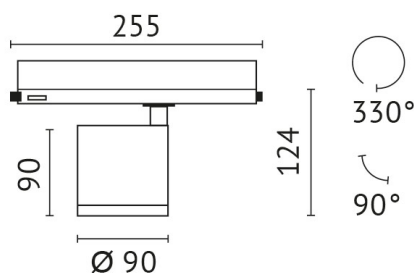

## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)

Downlight/spot/floodlight

MIN-18WNW12-60DDO



**Exchangeable control gear:**

Yes

**Nominal voltage:**

220V - 240V

**Voltage type:**

AC

**With control gear:**

Yes

#### Product dimensions

**Height/depth:**

124mm

**Length:**



255mm

**Outer diameter:**

90mm

**Width:**

90mm

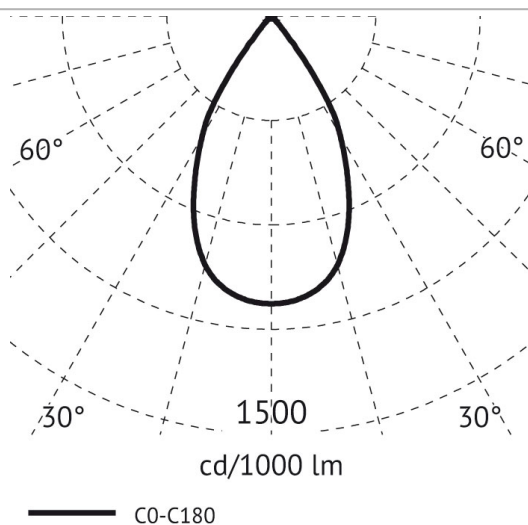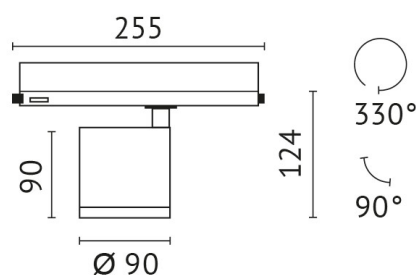

Misprints and errors excepted. Drawings and pictures are sketches. Dimensions and technical data are approximate. Length specifications without unit in millimeters. The Object photos shown are examples of applications independent of the actual effect. We reserve the right to make changes to the range, technology and design (without prior notice). Color deviations are due to printing technology, possible.

#### Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)