
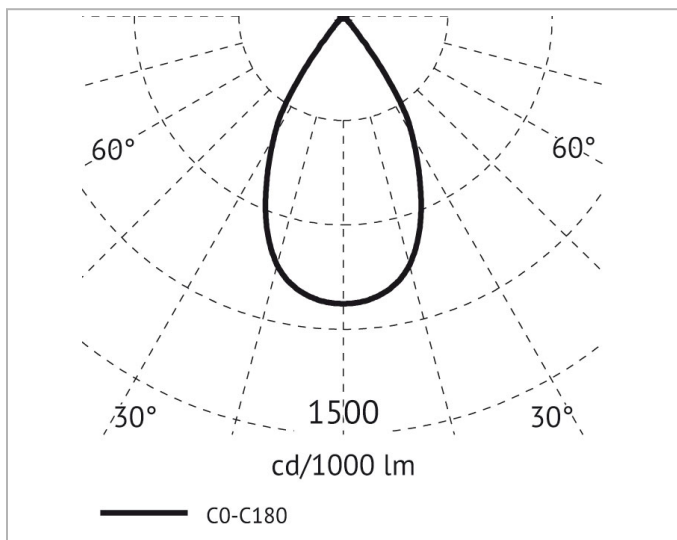


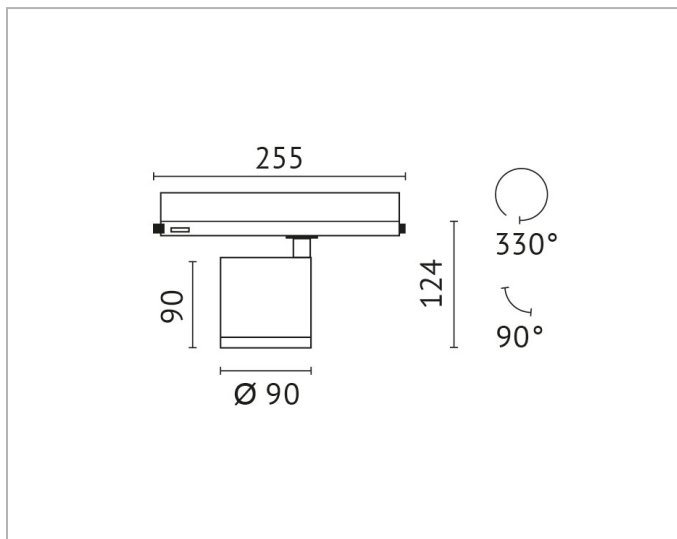

## Description

MIN, Spotlight for contact tracks, CoB LED, 17W, DALI, 3000K COB, CRI >90, with 3-phase-electronic adapter, incl. power supply integrated in adapter, 60° beam angle, clear tempered glass, body black

## General data

|                                           |                         |
|-------------------------------------------|-------------------------|
| <b>Adjustability:</b>                     | Rotating and swivelling |
| <b>Colour housing:</b>                    | Black                   |
| <b>Degree of protection (IP):</b>         | IP20                    |
| <b>Lamp holder:</b>                       | None                    |
| <b>Material housing:</b>                  | Aluminium               |
| <b>Protection class:</b>                  | II                      |
| <b>Suitable for light-track mounting:</b> | Yes                     |

## Photometric data

|                                                        |                  |
|--------------------------------------------------------|------------------|
| <b>Beam angle:</b>                                     | Wide beam 41-80° |
| <b>Colour consistency (McAdam ellipse):</b>            | SDCM3            |
| <b>Colour of light:</b>                                | White            |
| <b>Colour rendering index CRI:</b>                     | 90-100           |
| <b>Colour temperature:</b>                             | 3000K            |
| <b>Light outlet:</b>                                   | Direct           |
| <b>Light sharing:</b>                                  | Symmetric        |
| <b>Luminaire efficacy:</b>                             | 135lm/W          |
| <b>Luminous flux:</b>                                  | 2307lm           |
| <b>Max. system power:</b>                              | 17W              |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 2307lm           |
| <b>Suitable for number of lamps:</b>                   | 1                |

## Electrical data

|                         |                |
|-------------------------|----------------|
| <b>Connection type:</b> | Busbar adapter |
| <b>Dimming DALI:</b>    | Yes            |



## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)



**Exchangeable control gear:**

Yes

**Nominal voltage:**

220V - 240V

**Voltage type:**

AC

**With control gear:**

Yes

**Product dimensions**

**Height/depth:**

124mm

**Length:**




255mm

**Outer diameter:**

90mm

**Width:**

90mm

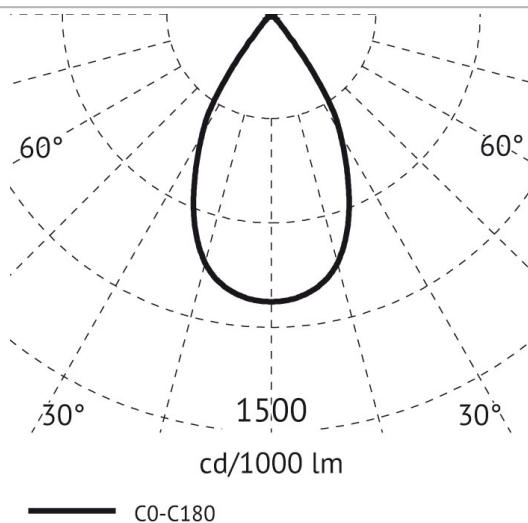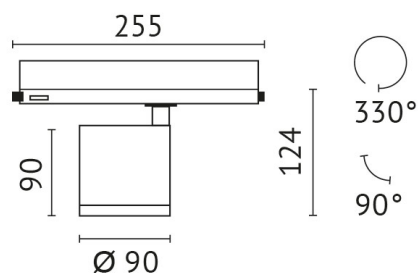

**Adress/Contact**

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)