


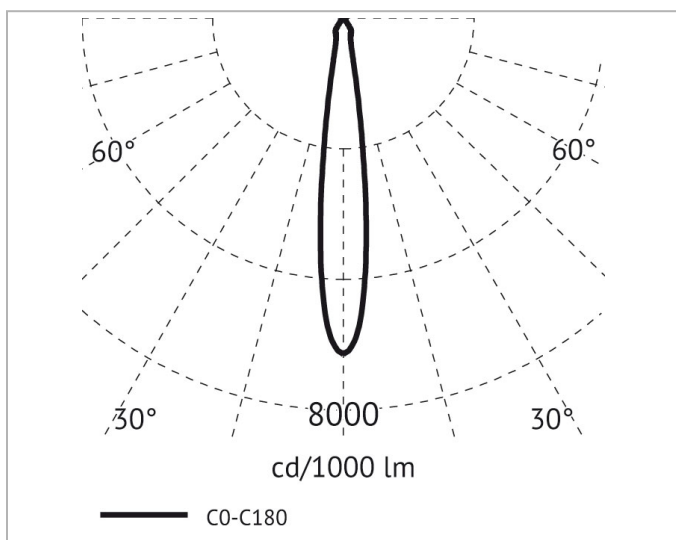

## Description

MIO, Spotlight for contact tracks ONETRACK DALI, CoB LED, 25W, 3500K COB, 650mA, CRI >90, with 3-phase-electronic adapter, incl. power supply integrated in adapter, 15° beam angle, clear tempered glass, body white

## General data

|                                           |                         |
|-------------------------------------------|-------------------------|
| <b>Adjustability:</b>                     | Rotating and swivelling |
| <b>Colour housing:</b>                    | White                   |
| <b>Degree of protection (IP):</b>         | IP20                    |
| <b>Lamp holder:</b>                       | None                    |
| <b>Material housing:</b>                  | Aluminium               |
| <b>Protection class:</b>                  | II                      |
| <b>Suitable for light-track mounting:</b> | Yes                     |
| <b>Surface protection:</b>                | Powder coating          |

## Photometric data

|                                                        |                      |
|--------------------------------------------------------|----------------------|
| <b>Beam angle:</b>                                     | Narrow beam 11 - 20° |
| <b>Colour consistency (McAdam ellipse):</b>            | SDCM3                |
| <b>Colour of light:</b>                                | White                |
| <b>Colour rendering index CRI:</b>                     | 90-100               |
| <b>Colour temperature:</b>                             | 3500K                |
| <b>Light outlet:</b>                                   | Direct               |
| <b>Light sharing:</b>                                  | Symmetric            |
| <b>Luminaire efficacy:</b>                             | 131lm/W              |
| <b>Luminous flux:</b>                                  | 3285lm               |
| <b>Max. system power:</b>                              | 25W                  |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 3285lm               |
| <b>Suitable for number of lamps:</b>                   | 1                    |

## Electrical data

|                         |                |
|-------------------------|----------------|
| <b>Connection type:</b> | Busbar adapter |
|-------------------------|----------------|



## Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH  
 Mastorter Str. 31 | 88069 Tettnang (Germany)  
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
 E-Mail: info@als.de | Web: www.als.de



|                                   |             |
|-----------------------------------|-------------|
| <b>Dimming DALI:</b>              | Yes         |
| <b>Exchangeable control gear:</b> | Yes         |
| <b>Nominal voltage:</b>           | 220V - 240V |
| <b>Voltage type:</b>              | AC          |
| <b>With control gear:</b>         | Yes         |

#### Product dimensions

|                        |       |
|------------------------|-------|
| <b>Height/depth:</b>   | 164mm |
| <b>Length:</b>         | 255mm |
| <b>Outer diameter:</b> | 95mm  |
| <b>Width:</b>          | 95mm  |

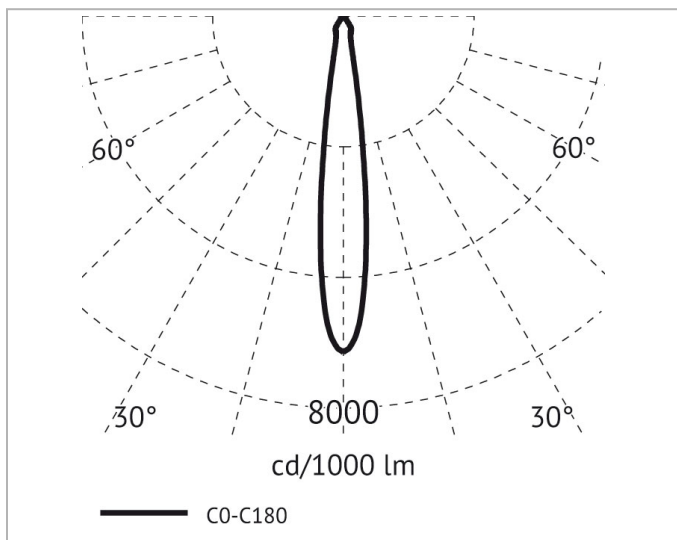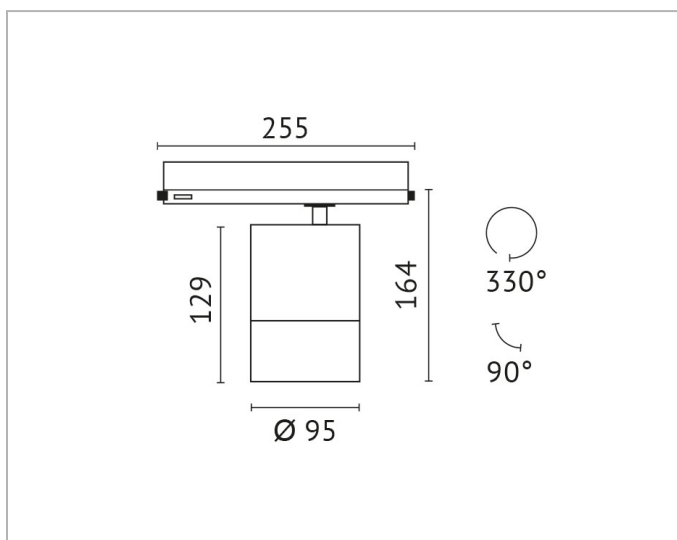

#### Adress/Contact