
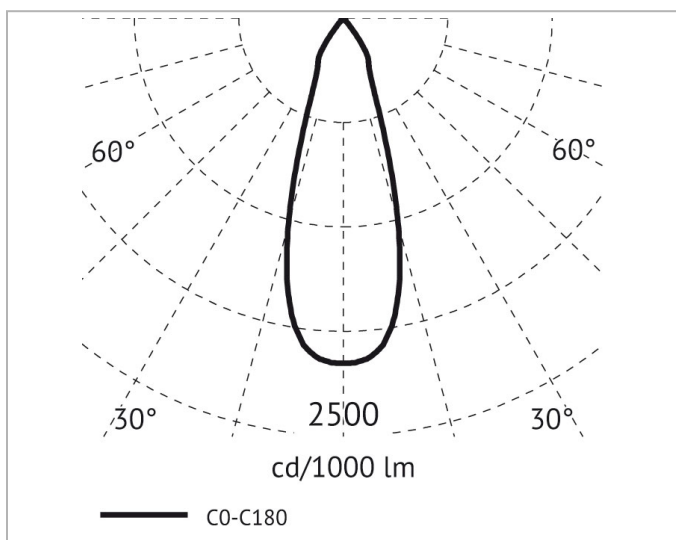


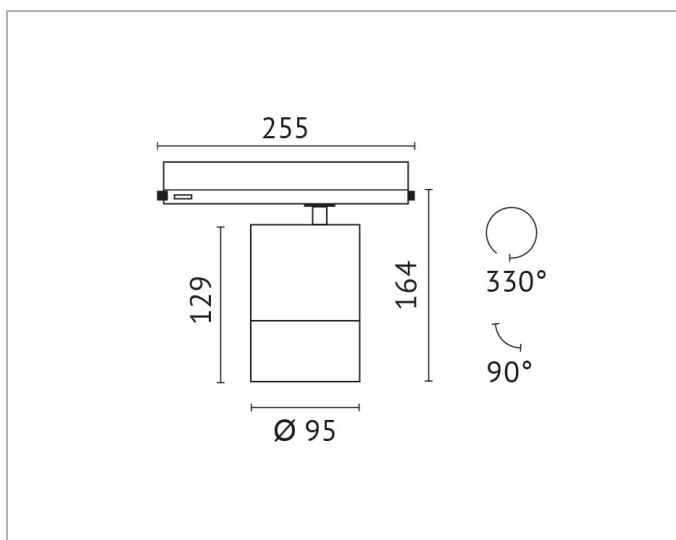

Description

MIO, Spotlight for contact tracks ONETRACK DALI, CoB LED, 34W, 3500K COB, 850mA, CRI >90, with 3-phase-electronic adapter, incl. power supply integrated in adapter, 36° beam angle, clear tempered glass, body black, DALI

General data

Adjustability:	Rotating and swivelling
Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	II
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Medium beam 21-40°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	3500K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	121lm/W
Luminous flux:	4114lm
Max. system power:	34W
Rated luminous flux according to IEC 62722-2-1:	4114lm
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
-------------------------	----------------



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Dimming DALI:	Yes
Exchangeable control gear:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	164mm
Length:	255mm
Outer diameter:	95mm
Width:	95mm

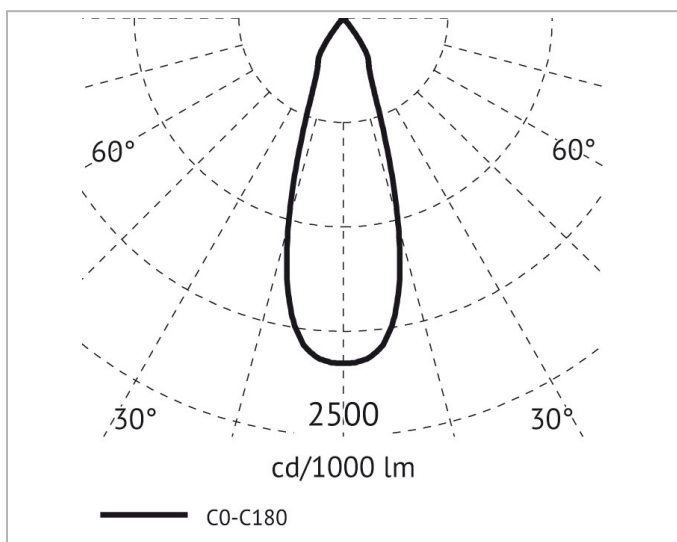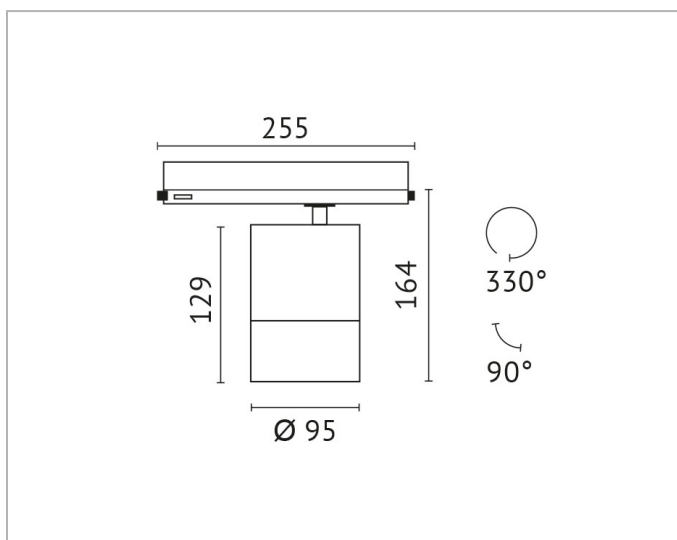

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de