
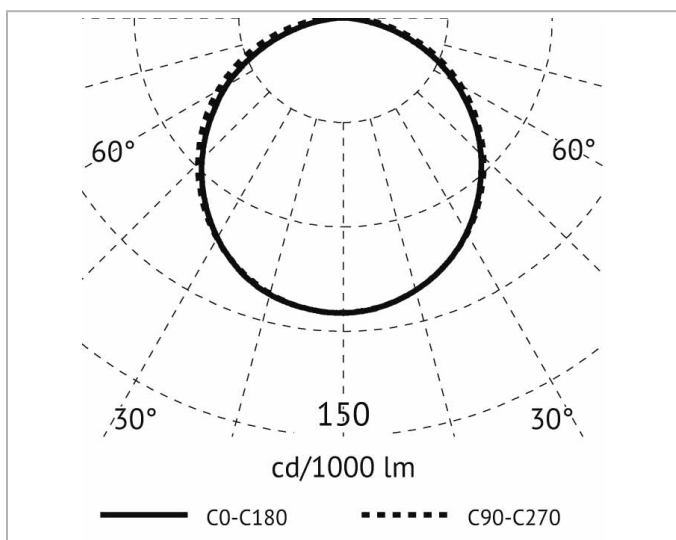
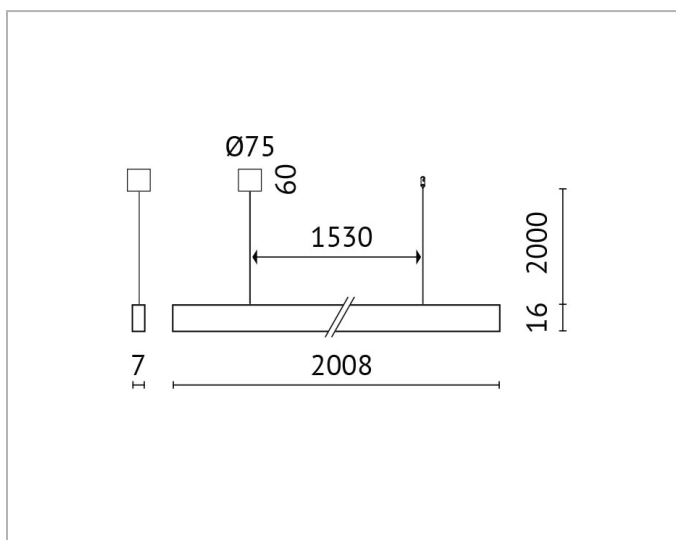


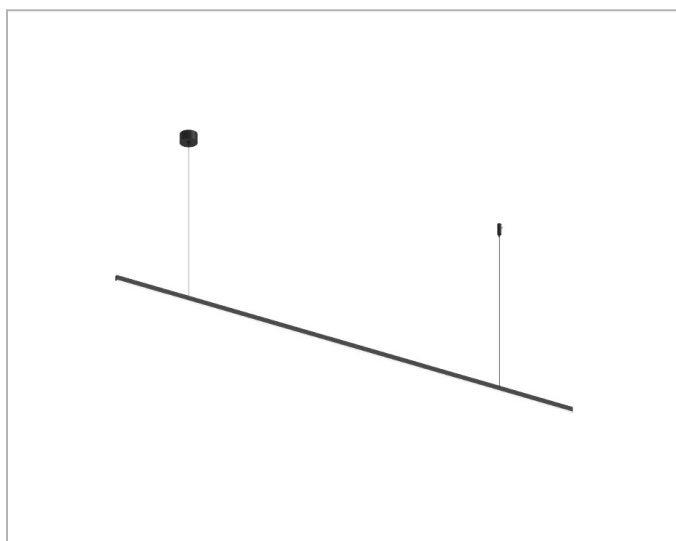

Description

MPL, Pendant light, DC42V LED 22W, direct light, 3000K, CRI >80, opal cover, incl. Tridonic driver, with suspension 2m, black matt color

General data

Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material cover:	Plastic, opal
Material housing:	Aluminium
Protection class:	II
With suspension:	Yes

Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	40lm/W
Max. system power:	22W
Rated luminous flux according to IEC 62722-2-1:	870lm
Suitable for number of lamps:	1
Type of grid:	None
Unified Glare Ratio (UGR):	27.25


Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC
With control gear:	Yes





Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

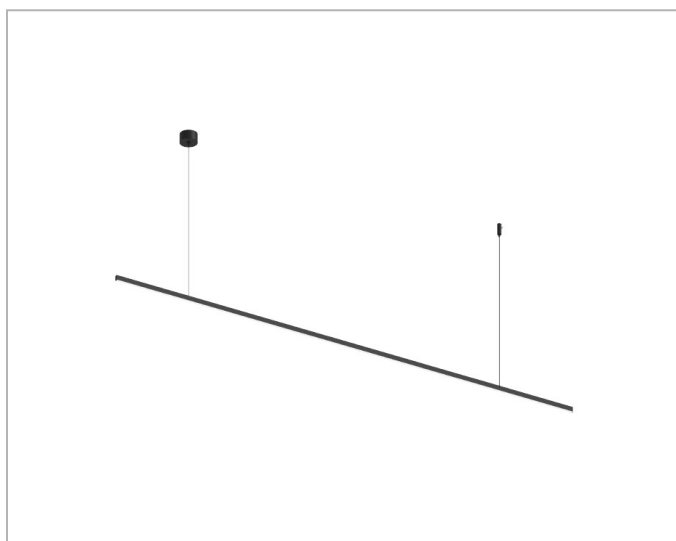

Product dimensions

Height/depth:	16mm
Length:	2008mm
Pendant length:	2000mm
Width:	7mm

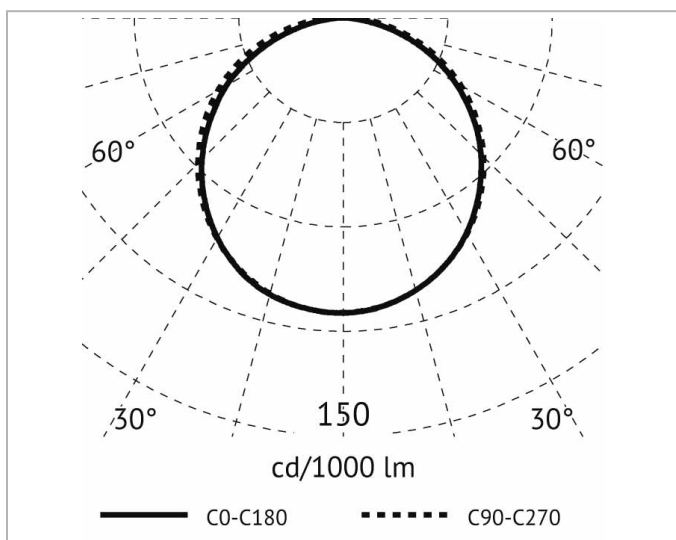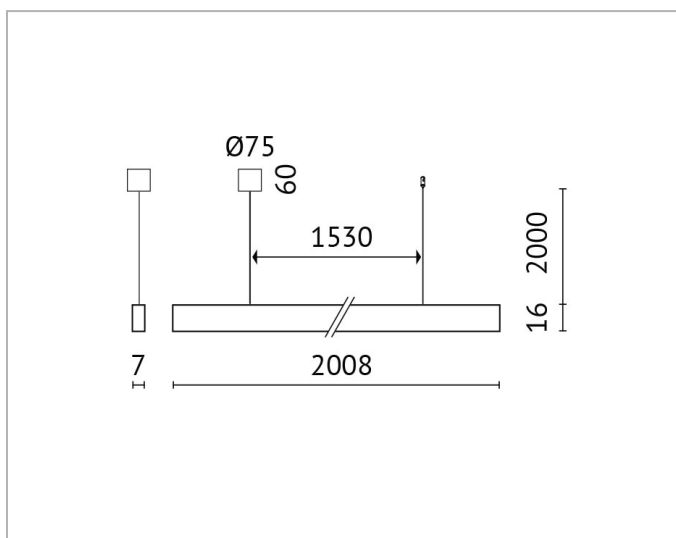

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de