
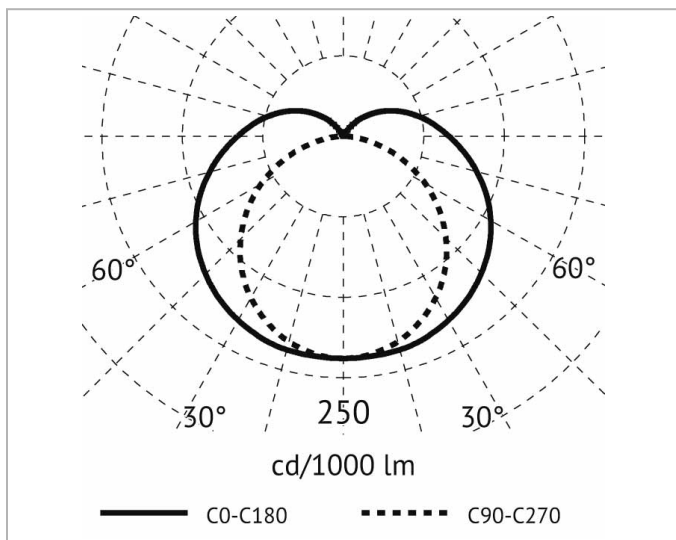


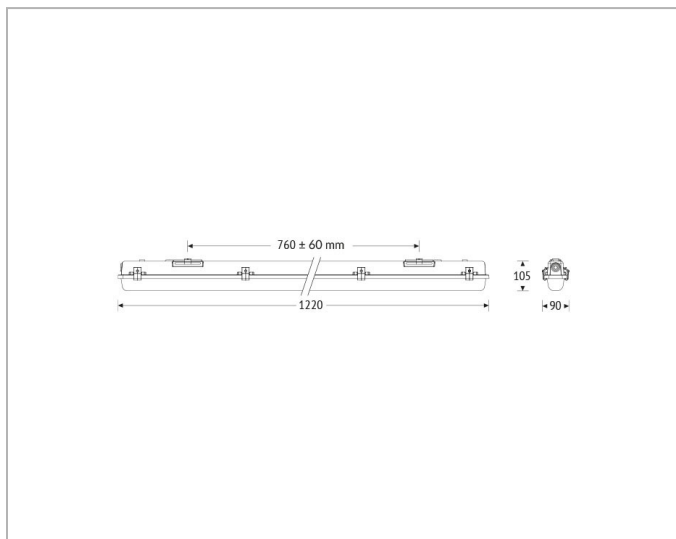

Description

PAC-D EL waterproof fitting, length = 1220mm, with stainless steel clips, 33W/19W, 4000K, MacAdam 3, PMMA

General data

Colour housing:	White
Degree of protection (IP):	IP65
Material cover:	Plastic, opal
Material housing:	Plastic
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for suspended mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	155lm/W
Max. system power:	33W
Rated luminous flux according to IEC 62722-2-1:	4600lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	24.15



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de





Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	105mm
Length:	1220mm
Width:	90mm

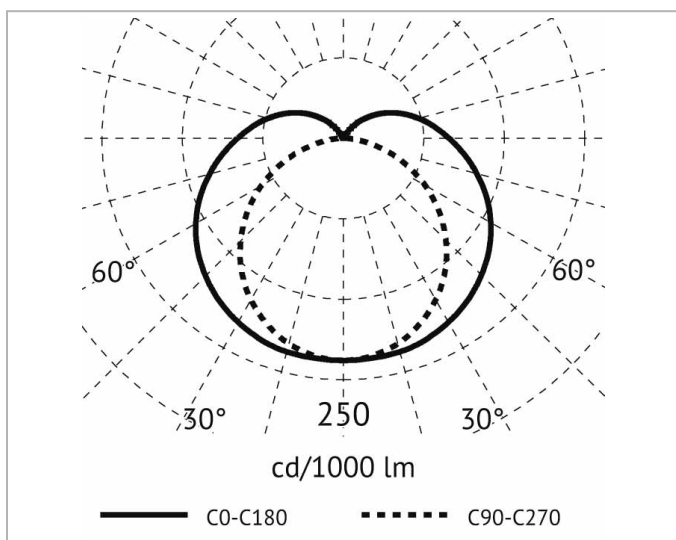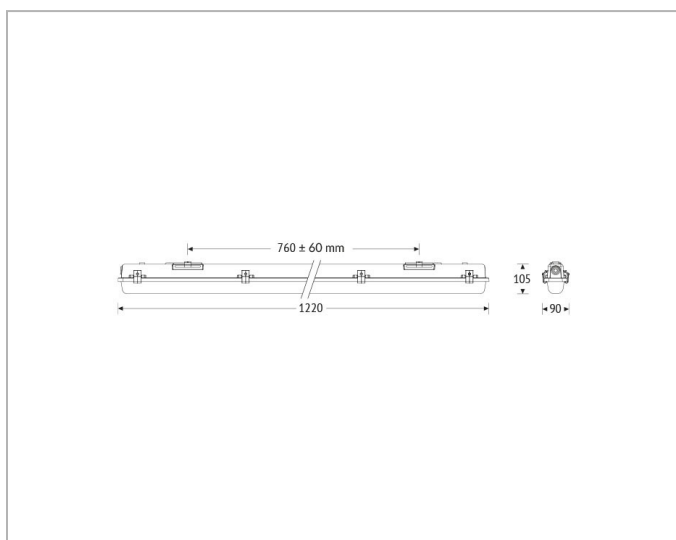

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de