

Description

PAS UP Recessed floor light LED 7W, round, Ø125mm, 4000K, angle beam 38°, adjustable optic ±15°, IK10, IP67, clear glass 10 mm, max. load pressure 2000 kg, CRI 80, Life: 60.000 h, with Driver, light housing, installation box, cover in stainless steel

General data

Colour housing:	Aluminium
Degree of protection (IP):	IP67
Housing material quality:	Stainless steel 316 L (1.4404)
Lamp holder:	None
Material cover:	Glass transparent
Material housing:	Aluminium
Max. load:	2000kg
Over rollable:	Yes
Protection class:	I

Photometric data

Adjustable:	Yes
Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light distributor:	Reflector
Light sharing:	Symmetric
Luminaire efficacy:	98lm/W
Max. system power:	7W
Rated life time L70/B50 at 25 °C:	200000h
Rated luminous flux according to IEC 62722-2-1:	636lm
Suitable for number of lamps:	1



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de





Electrical data

Conductor cross section:	1mm ²
Exchangeable control gear:	Yes
Impact strength:	IK10
No dim function:	Yes
Nominal current:	350mA
Nominal voltage:	230V
Number of poles:	3
Type of wiring:	Ending
Voltage type:	AC
With control gear:	Yes

Product dimensions

Built-in diameter:	230mm
Built-in height/depth:	115mm
Height/depth:	3mm
Outer diameter:	125mm

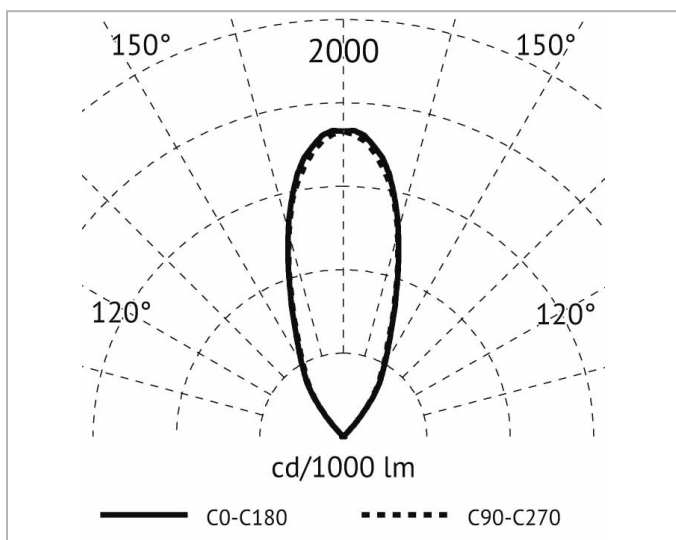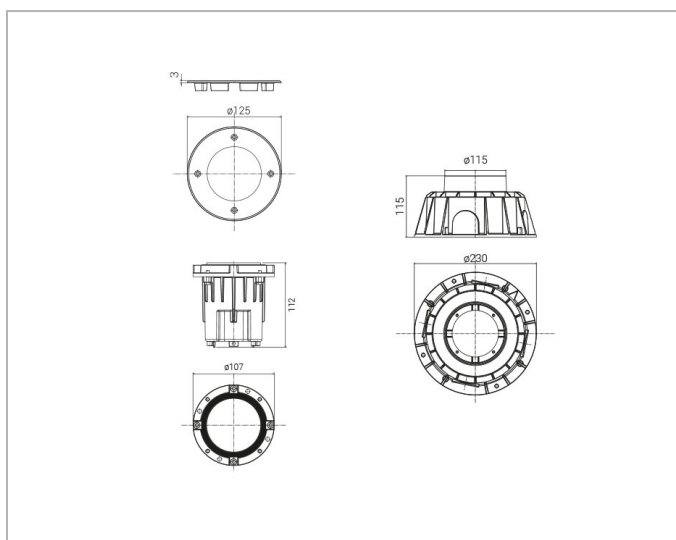

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de