



Description

PAS UP Recessed floor light LED 1W, Ø70mm, 3000K, angle beam 38°, IK08, IP67, clear glass 6 mm, max. load pressure 1000 kg, CRI 80, Life: 60.000 h, with external driver 24V DC, light housing and cover in stainless steel, installation box

General data



Colour housing:	Aluminium
Degree of protection (IP):	IP67
Housing material quality:	Stainless steel 316 L (1.4404)
Lamp holder:	None
Material cover:	Glass transparent
Material housing:	Stainless steel
Max. load:	1000kg
Over rollable:	Yes
Protection class:	III

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light distributor:	Reflector
Light sharing:	Symmetric
Luminaire efficacy:	62lm/W
Max. system power:	1W
Rated life time L70/B50 at 25 °C:	50000h
Rated luminous flux according to IEC 62722-2-1:	62lm
Suitable for number of lamps:	1

Electrical data

Conductor cross section: 0.75mm²

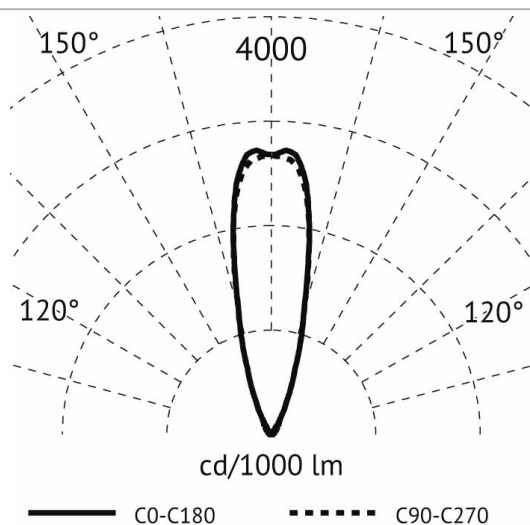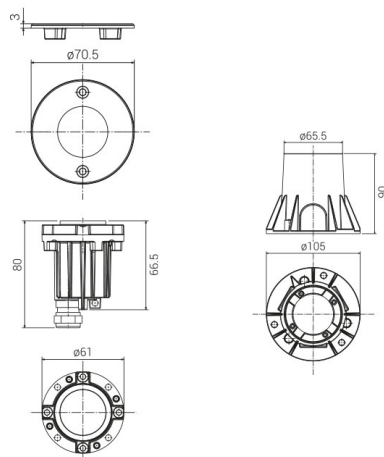

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Exchangeable control gear:

Yes

Impact strength:

IK08

No dim function:

Yes

Nominal voltage:

24V

Number of poles:

2

Type of control gear:

LED operating device
voltage-controlled

Type of wiring:

Ending

Voltage type:

DC

With control gear:

Yes

Product dimensions

Built-in diameter:

105mm

Built-in height/depth:



90mm

Height/depth:

3mm

Outer diameter:

70.5mm

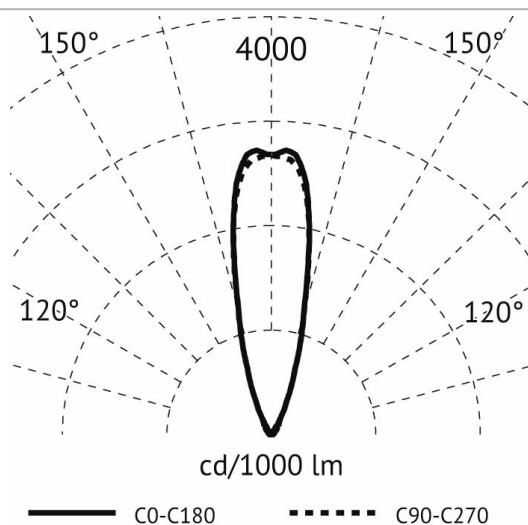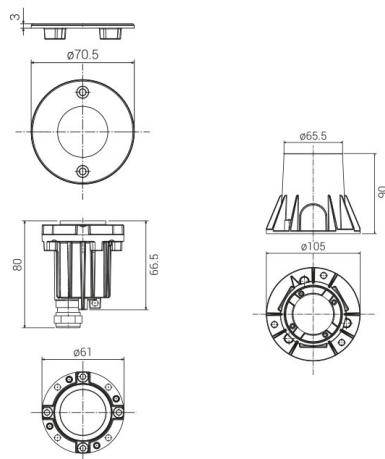

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de