



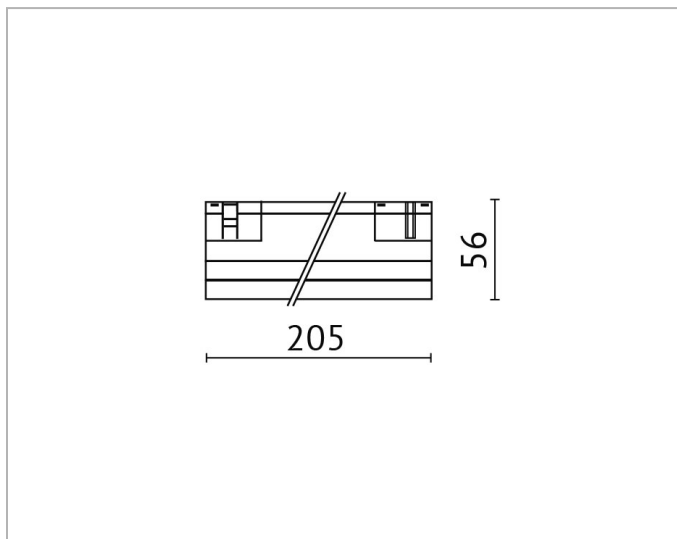

Description

PEP LED light insert, with opal cover, DC48V, 6W, DC350mA, 14.5V, 3000K, DALI dimmable, beam angle, 110°, CRI<80, black

General data

Adjustability:	Not adjustable
Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	III
Suitable for light-track mounting:	Yes
Surface protection:	Lacquered

Photometric data

Beam angle:	Extreme wide beam >80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	58lm/W
Luminous flux:	384lm
Max. system power:	6W
Rated luminous flux according to IEC 62722-2-1:	346lm
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
Dimming DALI:	Yes
Exchangeable control gear:	Yes
Nominal voltage:	48V



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Downlight/spot/floodlight

PEP-6WW2DD



Voltage type:

DC

Product dimensions

Height/depth:



48mm

Length:

205mm

Width:

24.5mm

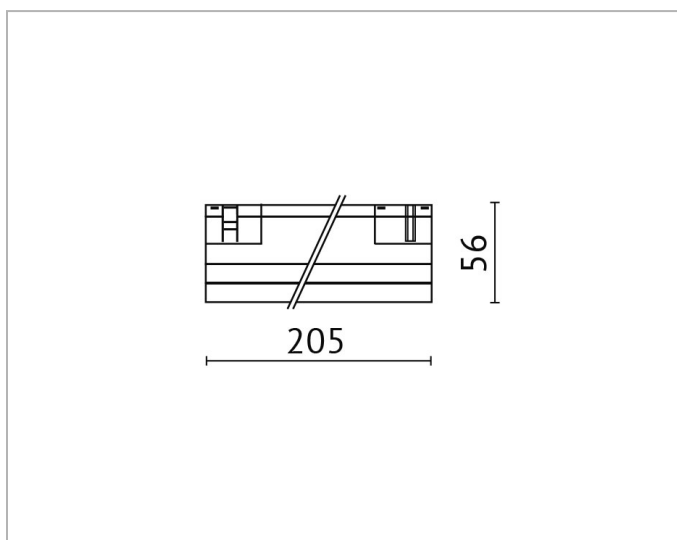

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de