


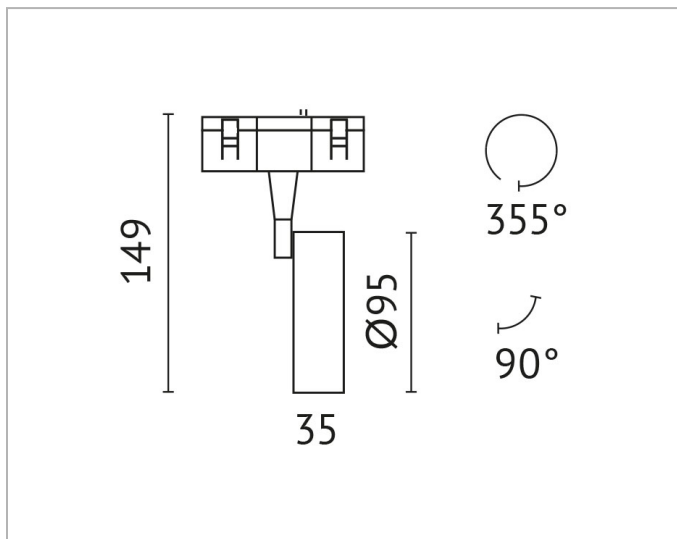

Description

PEP LED track spot light, DC48V, 7W, DC350mA, 9V, 3000K, 38°, warm white, CRI80, IP20, white

General data

Adjustability:	Rotating and swivelling
Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	III
Suitable for light-track mounting:	Yes
Surface protection:	Lacquered

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	2700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	100lm/W
Luminous flux:	1216lm
Max. system power:	11W
Rated luminous flux according to IEC 62722-2-1:	1095lm
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	48V
Voltage type:	DC



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de


Downlight/spot/floodlight

PEPR-13SW11



Product dimensions

Height/depth: 149mm
Outer diameter: 95mm

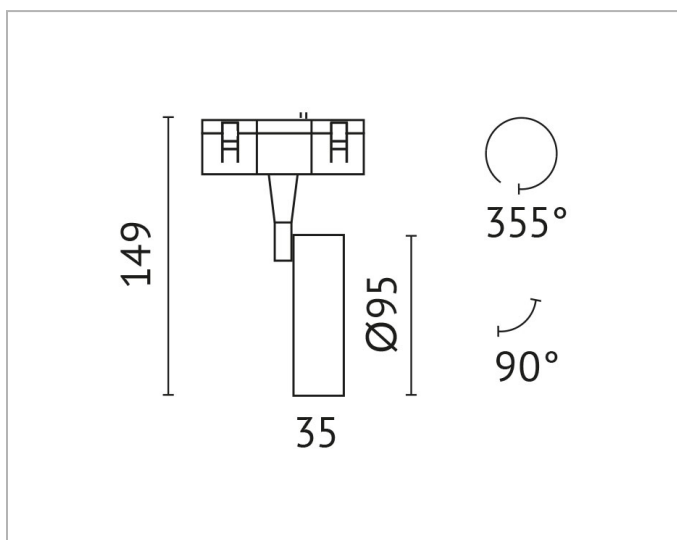

Misprints and errors excepted. Drawings and pictures are sketches. Dimensions and technical data are approximate. Length specifications without unit in millimeters. The Object photos shown are examples of applications independent of the actual effect. We reserve the right to make changes to the range, technology and design (without prior notice). Color deviations are due to printing technology, possible.

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de