



Description

PEP LED light channel, adjustable, with black pattern,, DC48V, 7,5W, DC350mA, 9V, beam angle 36°, 3000K warm white, CRI<80, black color

General data


Adjustability:	Swivelling
Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	III
Suitable for light-track mounting:	Yes
Surface protection:	Lacquered

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	82lm/W
Luminous flux:	638lm
Max. system power:	7W
Rated luminous flux according to IEC 62722-2-1:	574lm
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	48V

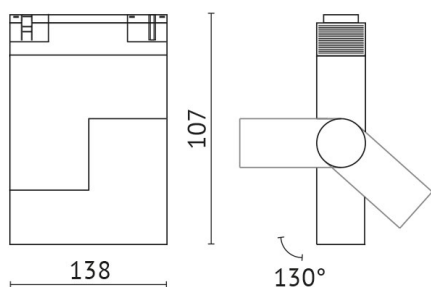

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Voltage type:

DC

Product dimensions

Height/depth:


107mm

Length:

138mm

Width:

24.5mm

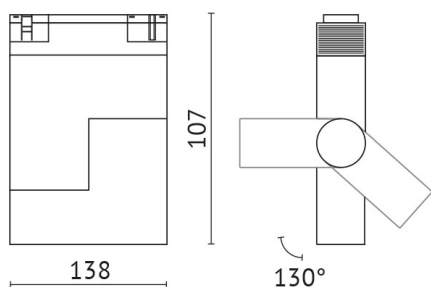

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de