



Description

4937AN4KO1 PROTO STRADA outdoor floodlight LED 25W, 4000K, CRI80, 220-240V 50/60HZ, Ø 270 mm, beam angle 17° symmetrical, ultra-white clear hardened front glass, sealed on the locking frame, swiveling mounting bracket, built-in driver, aluminum die-cast housing, anthracite , IP66, IK08

General data



Colour housing:	Anthracite
Degree of protection (IP):	IP66
Material housing:	Aluminium
Protection class:	I
Suitable for wall mounting:	Yes

Photometric data

Beam angle:	Narrow beam 11 - 20°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	124lm/W
Max. system power:	25W
Rated luminous flux according to IEC 62722-2-1:	3101lm
Suitable for number of lamps:	1
Type of grid:	None
Unified Glare Ratio (UGR):	19.20

Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK08
No dim function:	Yes

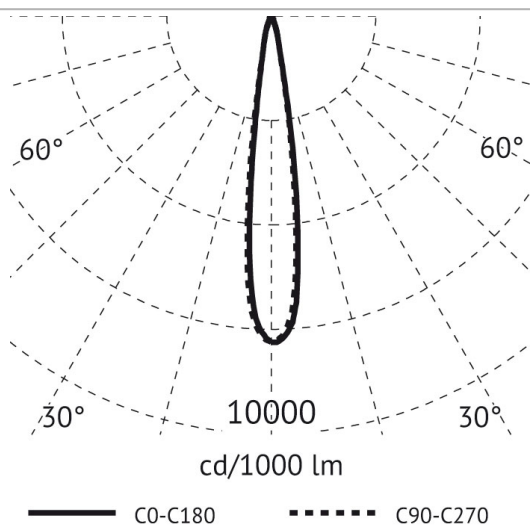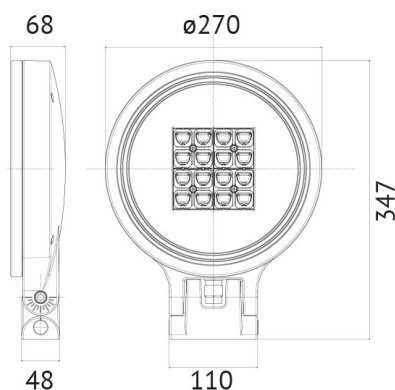

Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Nominal voltage: 230V
Voltage type: AC
With control gear: Yes

Product dimensions

Height/depth: 68mm
Length: 347mm
Outer diameter: 270mm

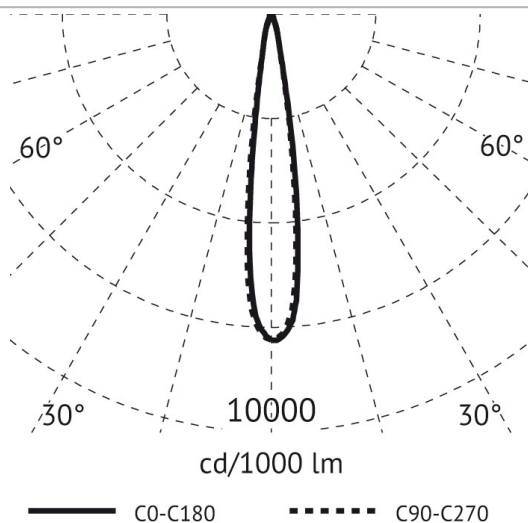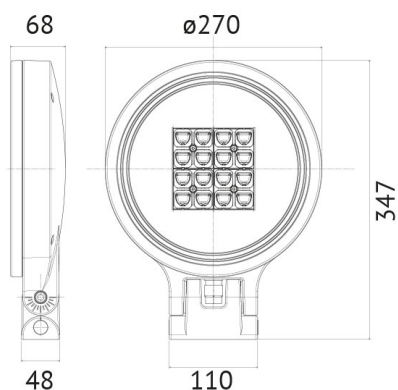

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de