
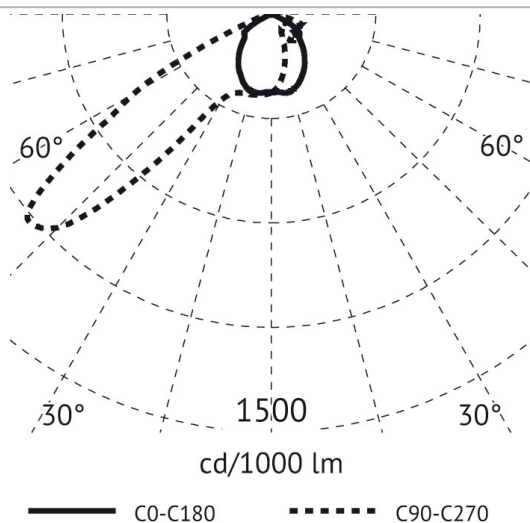


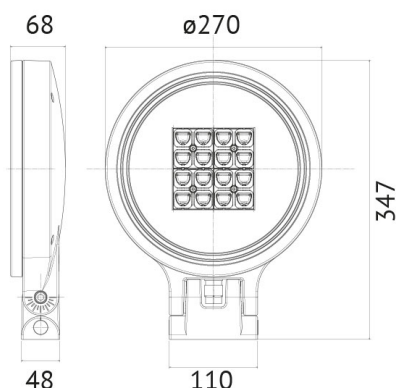

Description

4938AN4K03 PROTO STRADA Outdoor floodlight LED 35W, 4000K, 3420lm, CRI80, 220-240V 50/60HZ, Ø 270 mm, beam angle 90°x30° asymmetric, ultra-white clear tempered front glass, sealed at shutter frame, swivel mounting bracket, built-in driver, die-cast aluminum housing, anthracite, IP66, IK08

General data

Colour housing:	Anthracite
Degree of protection (IP):	IP66
Material housing:	Aluminium
Protection class:	I
Suitable for wall mounting:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric/asymmetric
Luminaire efficacy:	98lm/W
Max. system power:	35W
Rated luminous flux according to IEC 62722-2-1:	3420lm
Suitable for number of lamps:	1
Type of grid:	None
Unified Glare Ratio (UGR):	34.00

Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK08



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	68mm
Length:	347mm
Outer diameter:	270mm

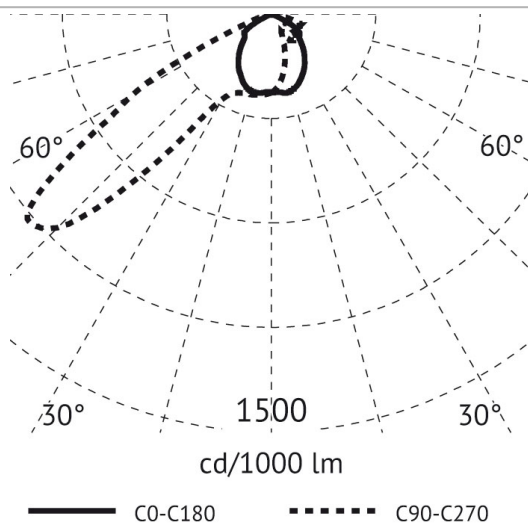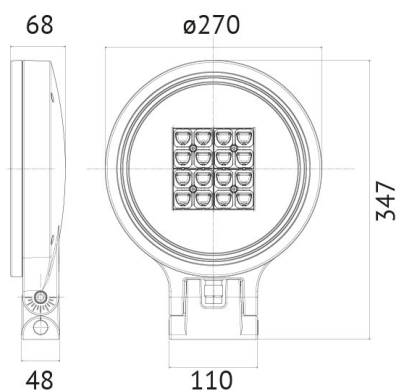

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de