
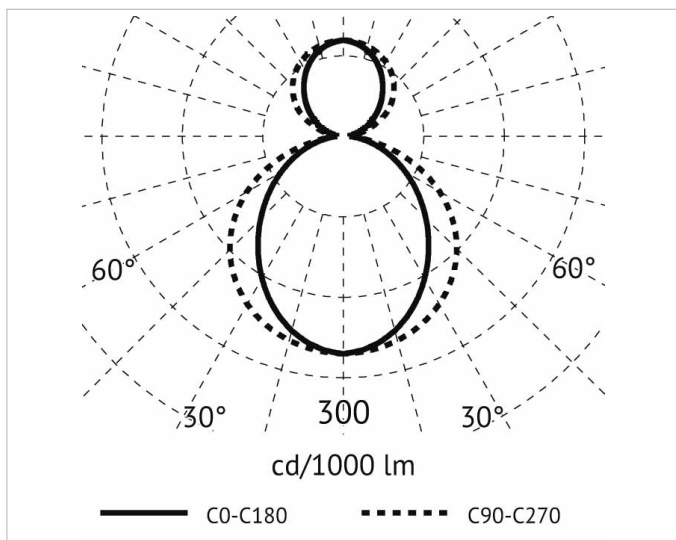
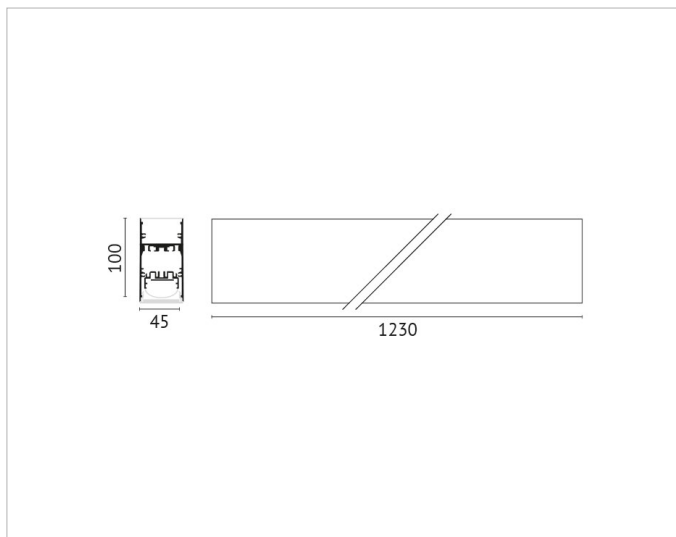


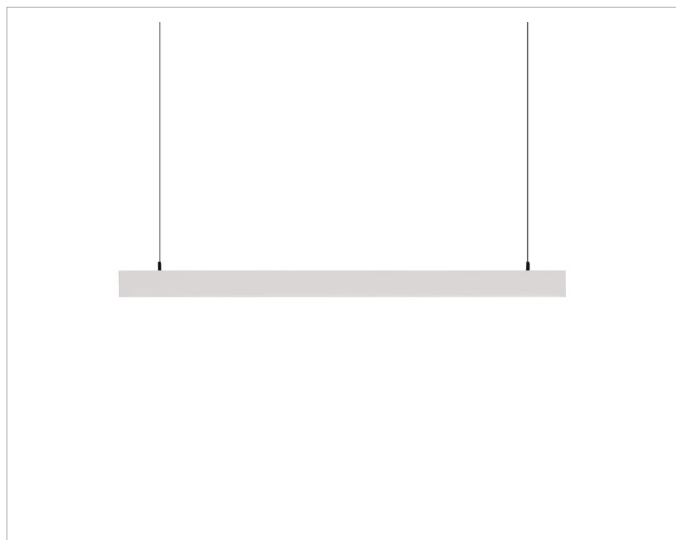

### Description

PSL100 Pendant LED 44W, 3000K, direct/indirect light emission, with opal PMMA diffuser, CRI>80, L=1230\*H=100\*W=45 mm, cover white

### General data

|                                   |               |
|-----------------------------------|---------------|
| <b>Colour housing:</b>            | White         |
| <b>Degree of protection (IP):</b> | IP20          |
| <b>Lamp holder:</b>               | None          |
| <b>Material cover:</b>            | Plastic, opal |
| <b>Material housing:</b>          | Aluminium     |
| <b>Protection class:</b>          | I             |
| <b>With suspension:</b>           | Yes           |

### Photometric data

|                                                        |                           |
|--------------------------------------------------------|---------------------------|
| <b>Colour consistency (McAdam ellipse):</b>            | SDCM3                     |
| <b>Colour of light:</b>                                | White                     |
| <b>Colour rendering index CRI:</b>                     | 80-89                     |
| <b>Colour temperature:</b>                             | 3000K                     |
| <b>Light distributor:</b>                              | Diffuser lens/optic/panel |
| <b>Light outlet:</b>                                   | Direct/indirect           |
| <b>Light sharing:</b>                                  | Symmetric                 |
| <b>Luminaire efficacy:</b>                             | 92lm/W                    |
| <b>Max. system power:</b>                              | 44W                       |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 4063lm                    |
| <b>Reflector:</b>                                      | None                      |
| <b>Suitable for number of lamps:</b>                   | 8                         |
| <b>Type of grid:</b>                                   | None                      |
| <b>Unified Glare Ratio (UGR):</b>                      | 24.1                      |

### Electrical data

|                                   |             |
|-----------------------------------|-------------|
| <b>Exchangeable control gear:</b> | Yes         |
| <b>No dim function:</b>           | Yes         |
| <b>Nominal voltage:</b>           | 220V - 240V |




### Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de

# Pendant luminaire



## PSL100-1200WW1O

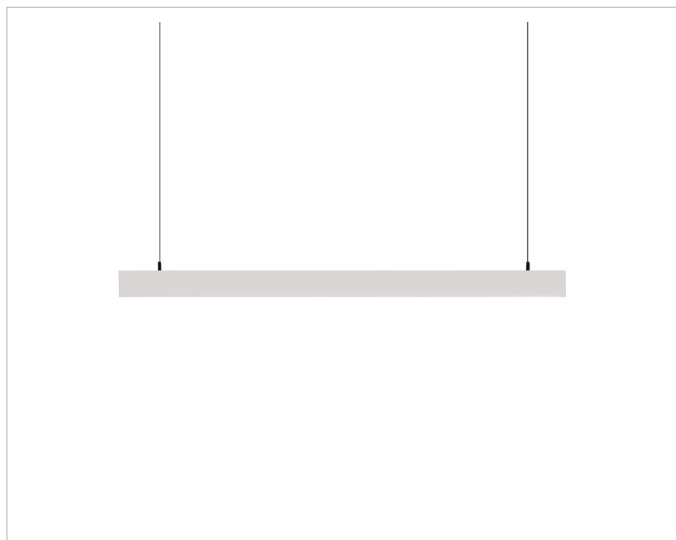

**Voltage type:** AC  
**With control gear:** Yes

### Product dimensions

**Height/depth:** 100mm  
**Length:** 1230mm  
**Pendant length:** 3000mm  
**Width:** 45mm

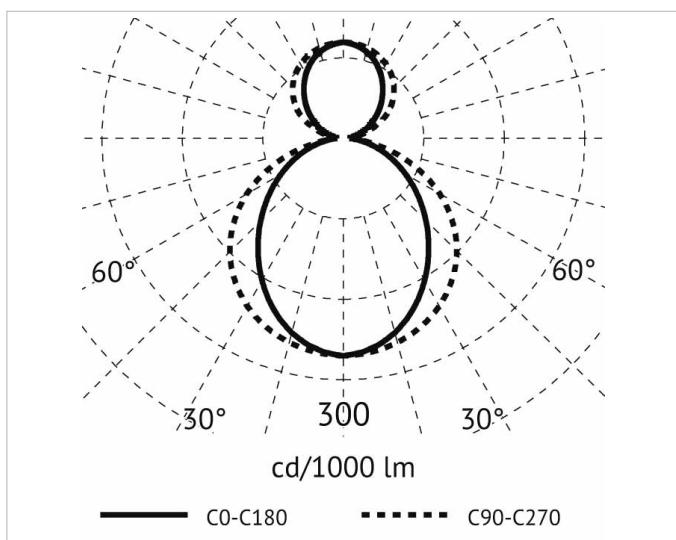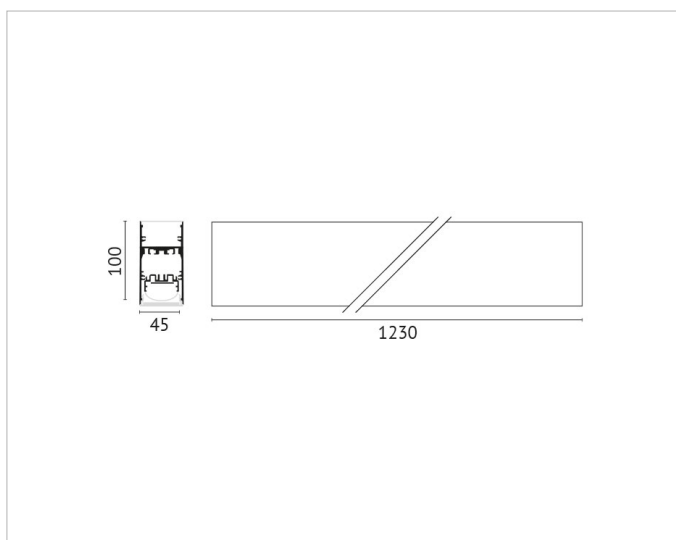

Misprints and errors excepted. Drawings and pictures are sketches. Dimensions and technical data are approximate. Length specifications without unit in millimeters. The Object photos shown examples of applications independent of the actual effect. We reserve the right to make changes to the range, technology and design (without prior notice). Color deviations are due to printing technology, possible.

### Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)