
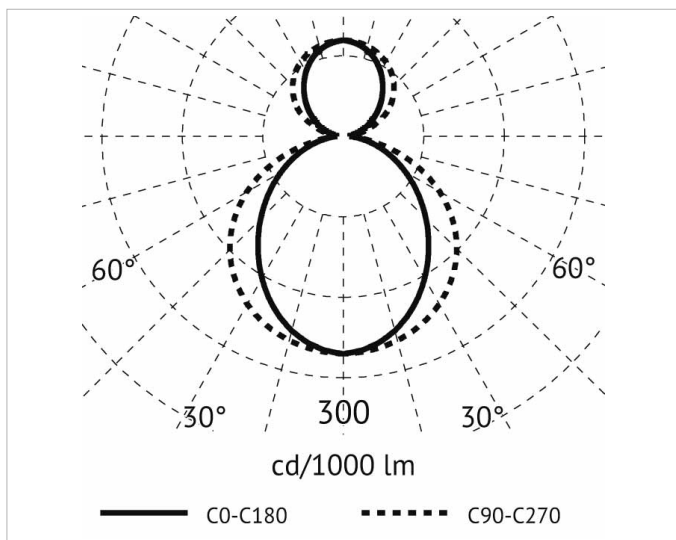
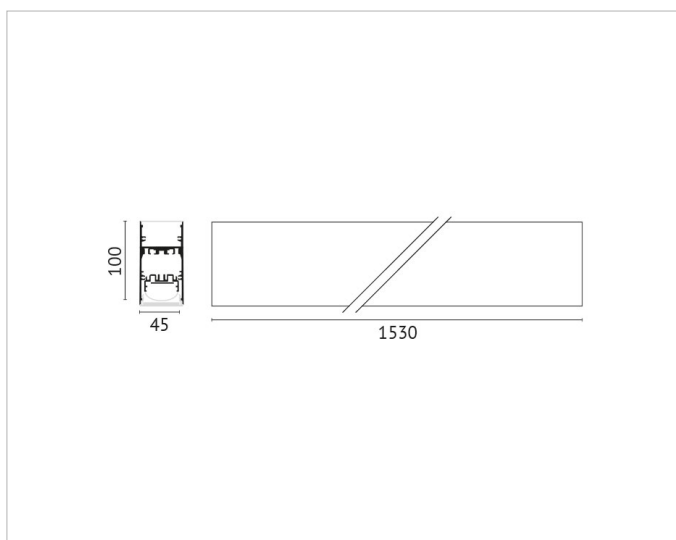


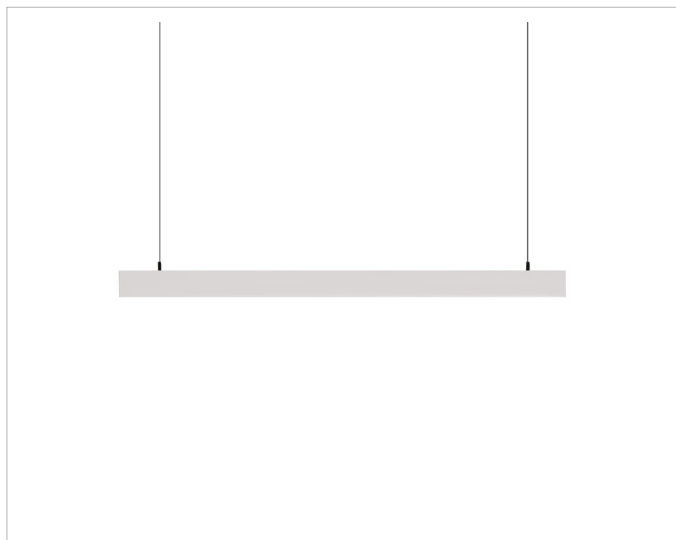

Description

PSL100 Pendant LED 57W, 4000K, direct/indirect light emission, with opal PMMA diffuser, CRI>80, L=1530*H=100*W=45 mm, cover white

General data

Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material cover:	Plastic, opal
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light distributor:	Diffuser lens/optic/panel
Light outlet:	Direct/indirect
Light sharing:	Symmetric
Luminaire efficacy:	96lm/W
Max. system power:	57W
Rated luminous flux according to IEC 62722-2-1:	5446lm
Reflector:	None
Suitable for number of lamps:	8
Type of grid:	None
Unified Glare Ratio (UGR):	24.35

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	220V - 240V




Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Pendant luminaire



PSL100-1500NW1O

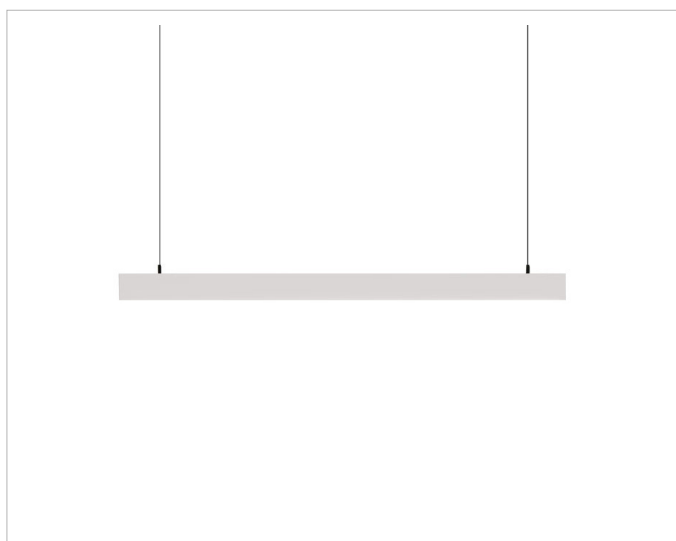

Voltage type: AC
With control gear: Yes

Product dimensions

Height/depth: 100mm
Length: 1530mm
Pendant length: 3000mm
Width: 45mm

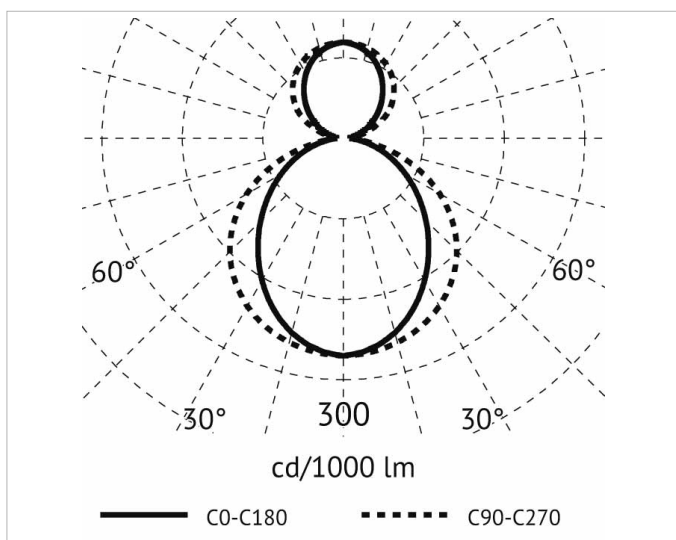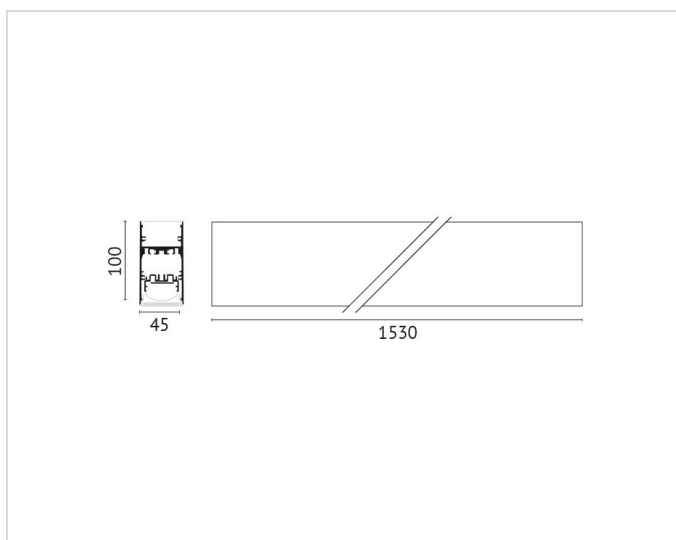

Misprints and errors excepted. Drawings and pictures are sketches. Dimensions and technical data are approximate. Length specifications without unit in millimeters. The Object photos shown examples of applications independent of the actual effect. We reserve the right to make changes to the range, technology and design (without prior notice). Color deviations are due to printing technology, possible.

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de