
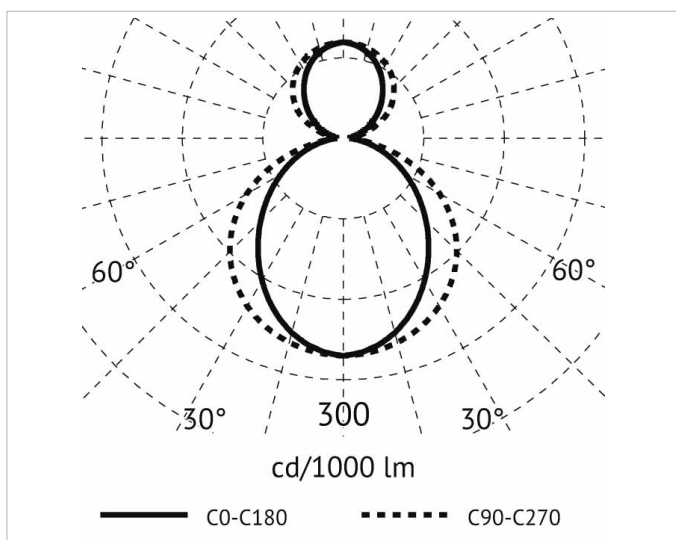
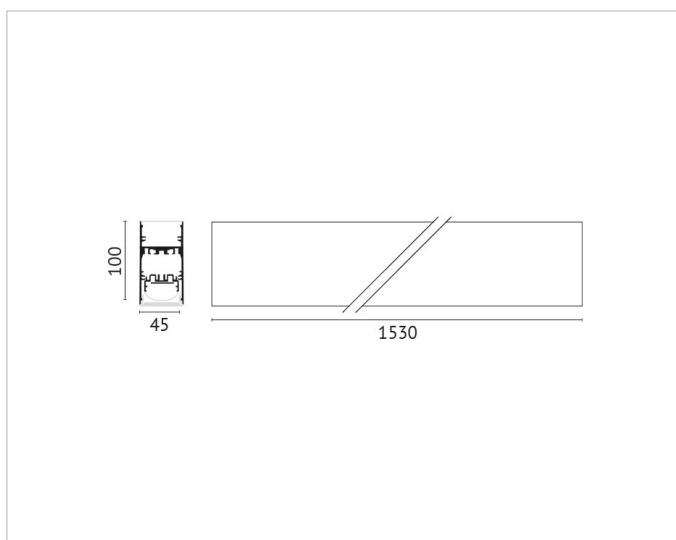


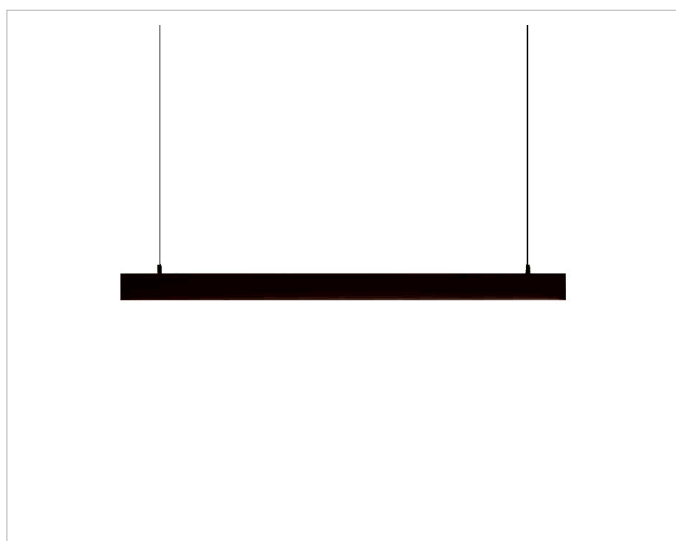

Description

PSL100 Pendant LED 57W, 2700K, direct/indirect light emission, with opal PMMA diffuser, CRI>80, L=1530*H=100*W=45 mm, cover black

General data

Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material cover:	Plastic, opal
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	2700K
Light distributor:	Diffuser lens/optic/panel
Light outlet:	Direct/indirect
Light sharing:	Symmetric
Luminaire efficacy:	88lm/W
Max. system power:	57W
Rated luminous flux according to IEC 62722-2-1:	5040lm
Reflector:	None
Suitable for number of lamps:	8
Type of grid:	None
Unified Glare Ratio (UGR):	24.05

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	220V - 240V




Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Pendant luminaire



PSL100-1500SW20

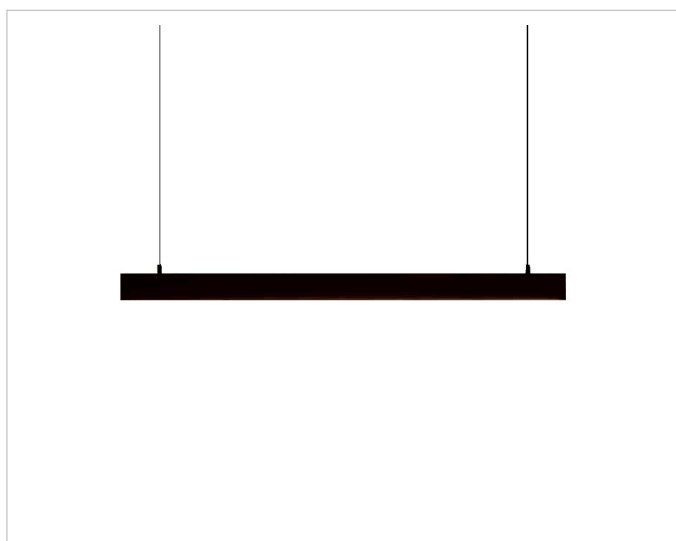

Voltage type: AC
With control gear: Yes

Product dimensions

Height/depth: 100mm
Length: 1530mm
Pendant length: 3000mm
Width: 45mm

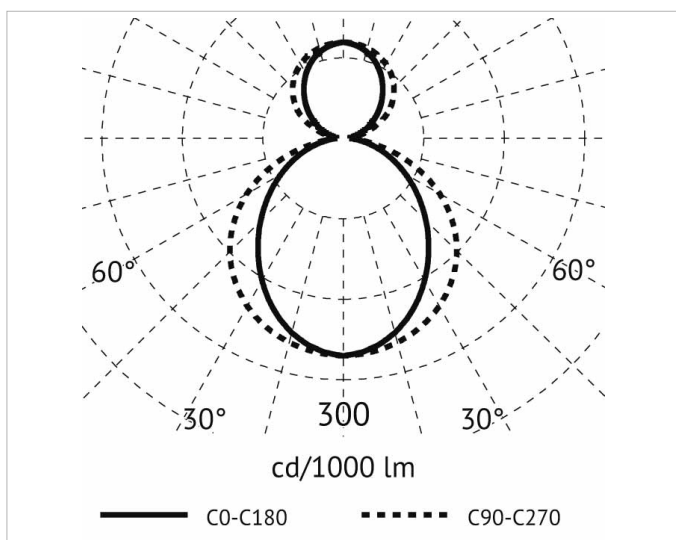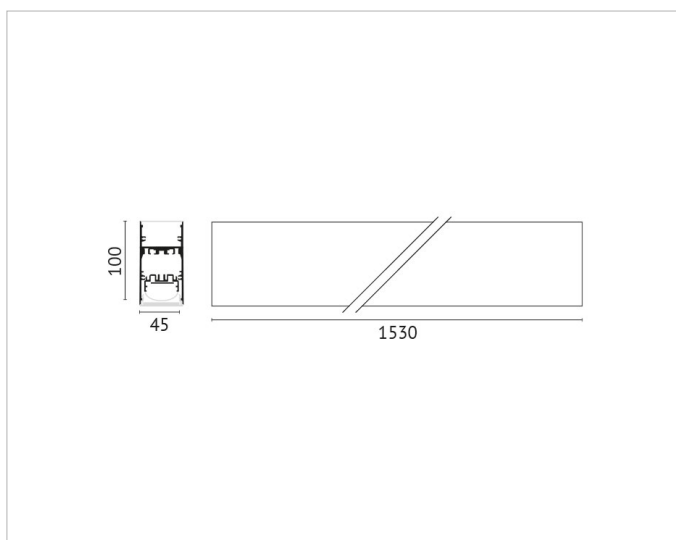

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de