
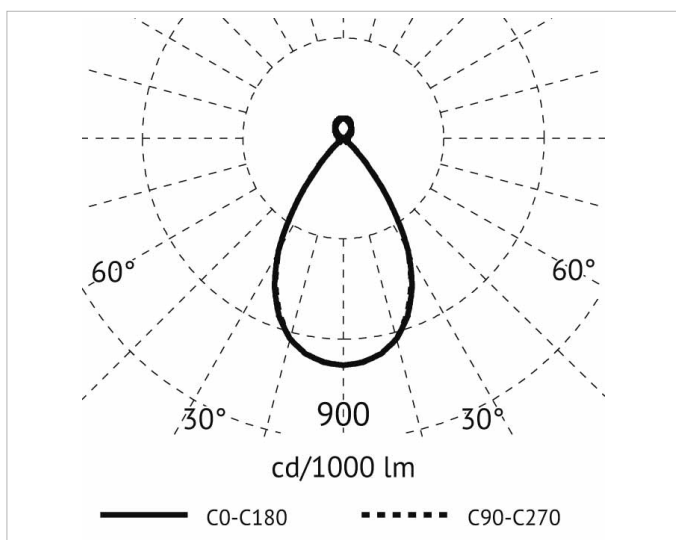
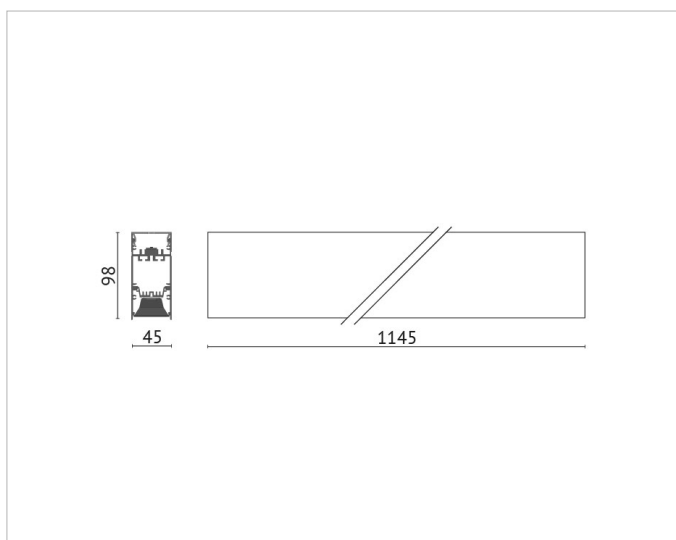


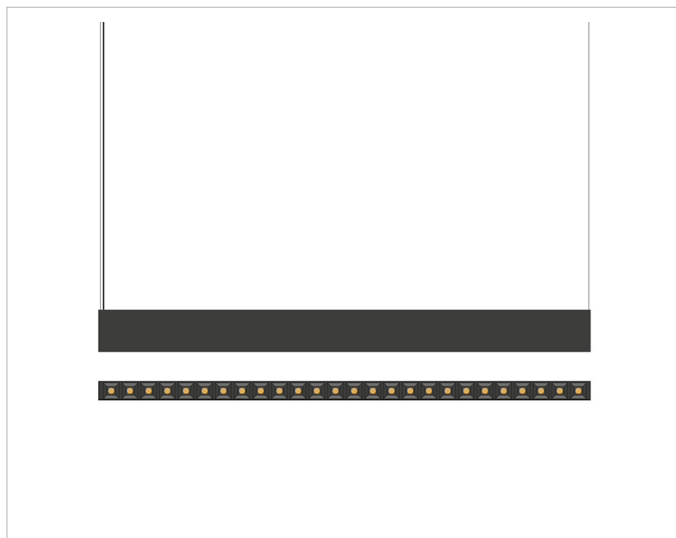

### Description

PSL100 LED, pendant luminaire, UGR<19, 51W, direct/indirect light beam, PMMA cover, opal, housing: black, 4000K, CRI>80, black linear reflector, L=1230\*W=45\*H=100 mm, incl. power supply

### General data

|                                   |               |
|-----------------------------------|---------------|
| <b>Colour housing:</b>            | Black         |
| <b>Degree of protection (IP):</b> | IP20          |
| <b>Lamp holder:</b>               | None          |
| <b>Material cover:</b>            | Plastic, opal |
| <b>Material housing:</b>          | Aluminium     |
| <b>Protection class:</b>          | I             |
| <b>With suspension:</b>           | Yes           |


### Photometric data

|                                                        |                 |
|--------------------------------------------------------|-----------------|
| <b>Colour consistency (McAdam ellipse):</b>            | SDCM3           |
| <b>Colour of light:</b>                                | White           |
| <b>Colour rendering index CRI:</b>                     | 80-89           |
| <b>Colour temperature:</b>                             | 4000K           |
| <b>Light distributor:</b>                              | Focal lens      |
| <b>Light outlet:</b>                                   | Direct/indirect |
| <b>Light sharing:</b>                                  | Symmetric       |
| <b>Luminaire efficacy:</b>                             | 111lm/W         |
| <b>Max. system power:</b>                              | 49W             |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 5452lm          |
| <b>Reflector:</b>                                      | None            |
| <b>Suitable for number of lamps:</b>                   | 4               |
| <b>Suitable for workplace according to EN 12464-1:</b> | Yes             |
| <b>Type of grid:</b>                                   | Matt            |
| <b>Unified Glare Ratio (UGR):</b>                      | 15.7            |



### Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de


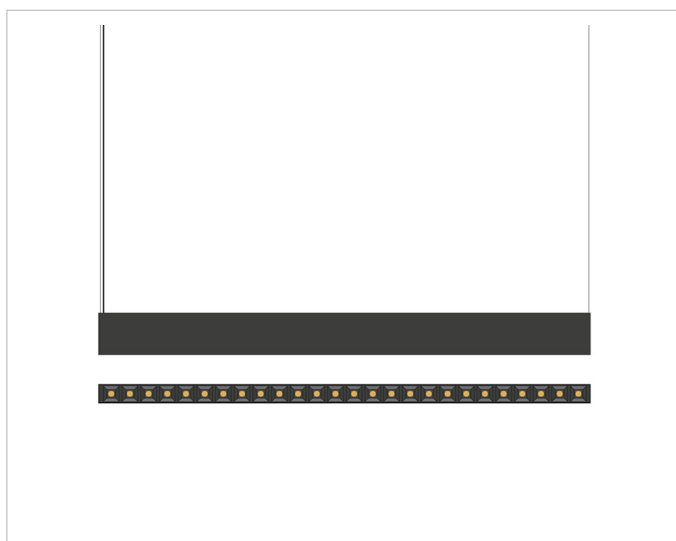


### Electrical data

|                                   |             |
|-----------------------------------|-------------|
| <b>Exchangeable control gear:</b> | Yes         |
| <b>No dim function:</b>           | Yes         |
| <b>Nominal voltage:</b>           | 220V - 240V |
| <b>Voltage type:</b>              | AC          |
| <b>With control gear:</b>         | Yes         |

### Product dimensions

|                        |        |
|------------------------|--------|
| <b>Height/depth:</b>   | 98mm   |
| <b>Length:</b>         | 1145mm |
| <b>Pendant length:</b> | 3000mm |
| <b>Width:</b>          | 45mm   |

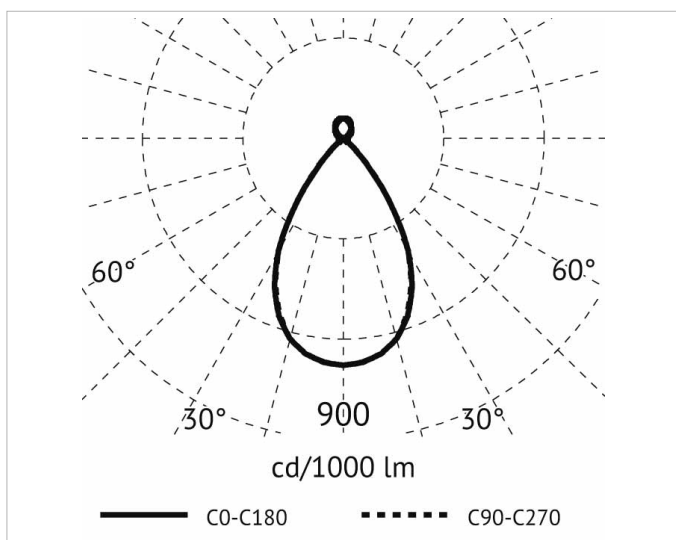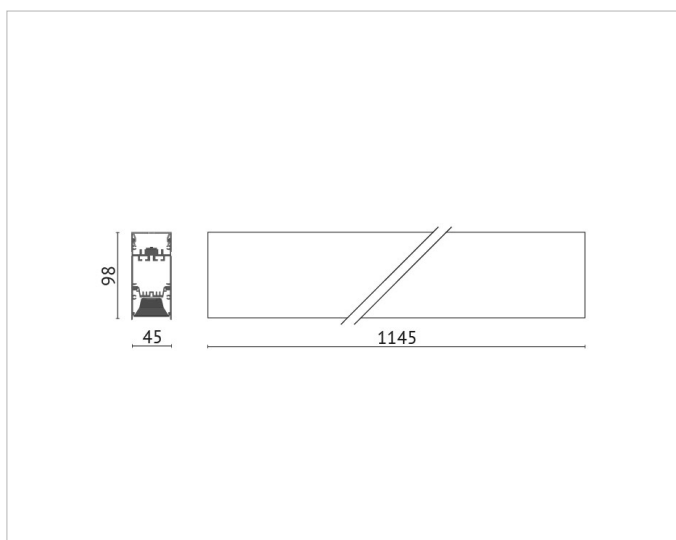

### Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)