
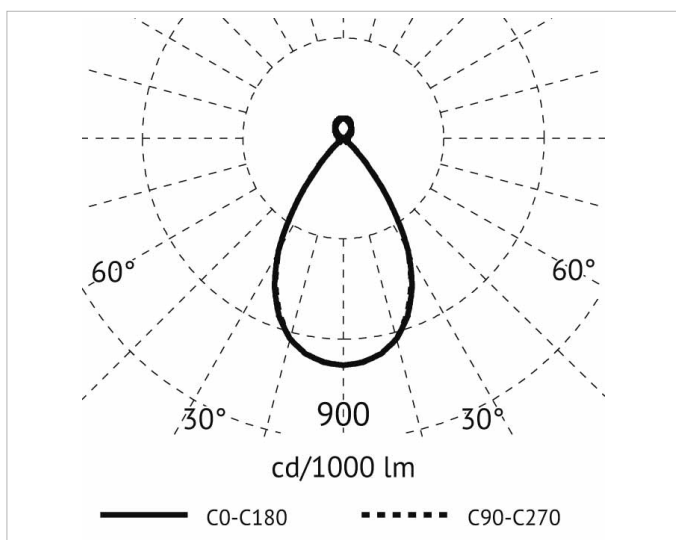


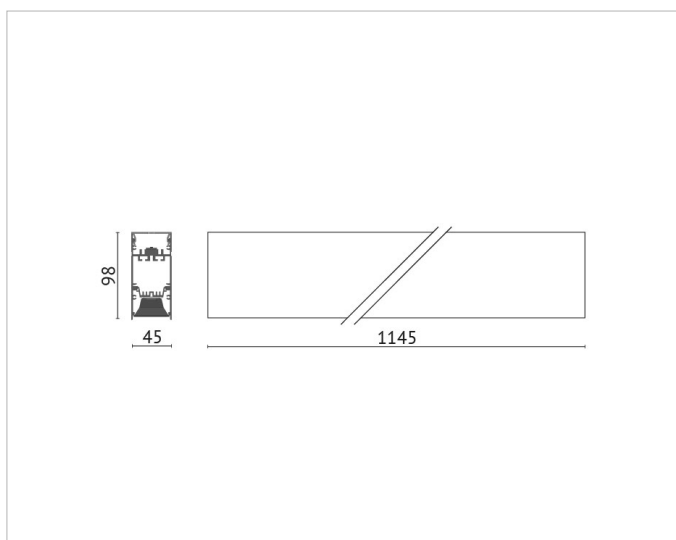

Description

PSL100 LED, pendant luminaire, UGR<19, 51W, direct/indirect light beam, PMMA cover, opal, housing: white, 3000K, CRI>80, white linear reflector, L=1230*W=45*H=100 mm, incl. power supply

General data

Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material cover:	Plastic, opal
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light distributor:	Focal lens
Light outlet:	Direct/indirect
Light sharing:	Symmetric
Luminaire efficacy:	119lm/W
Max. system power:	49W
Rated luminous flux according to IEC 62722-2-1:	5850lm
Reflector:	None
Suitable for number of lamps:	4
Suitable for workplace according to EN 12464-1:	Yes
Type of grid:	Matt
Unified Glare Ratio (UGR):	17.5




Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Pendant luminaire

PSL100R-1140WW1-1


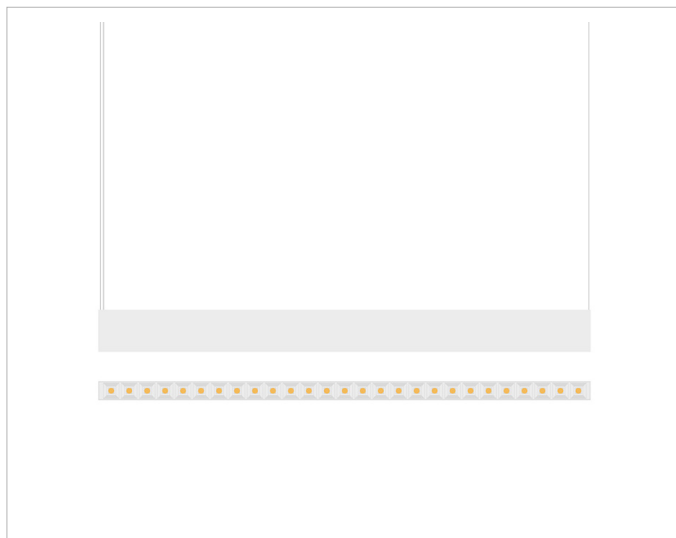


Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	98mm
Length:	1145mm
Pendant length:	3000mm
Width:	45mm

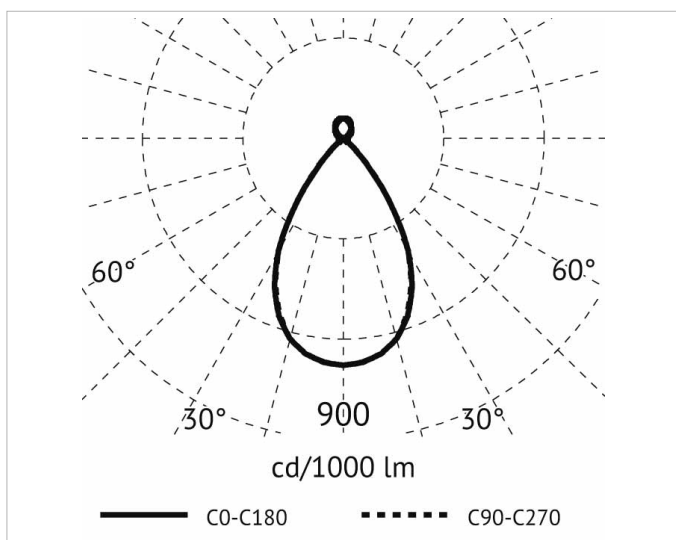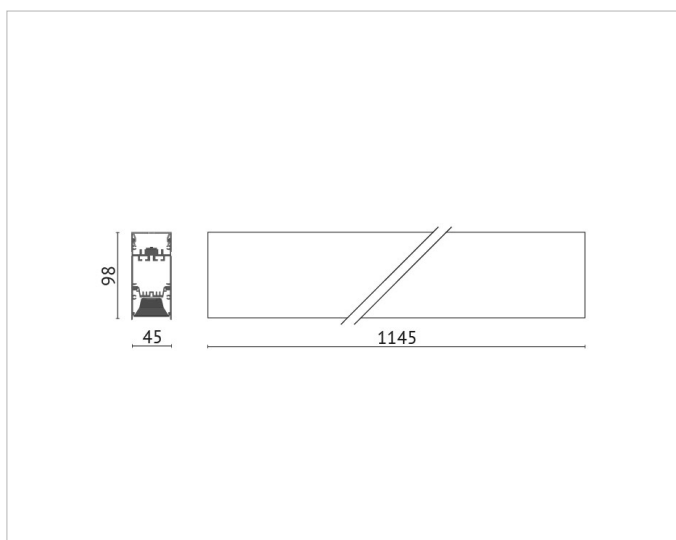

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de