
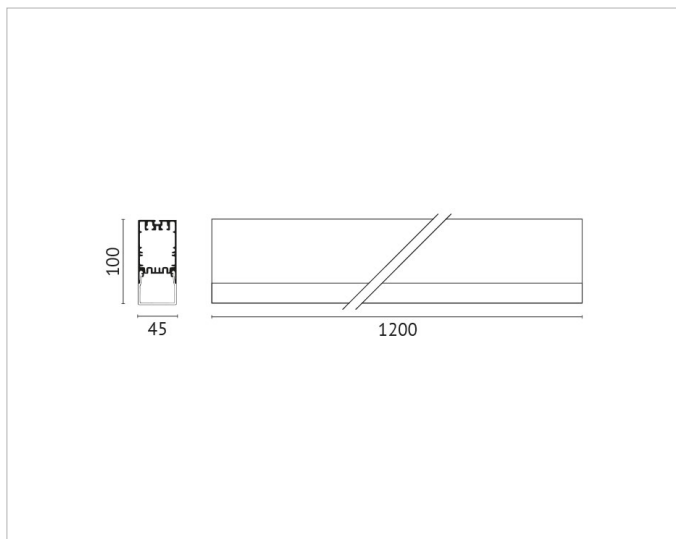


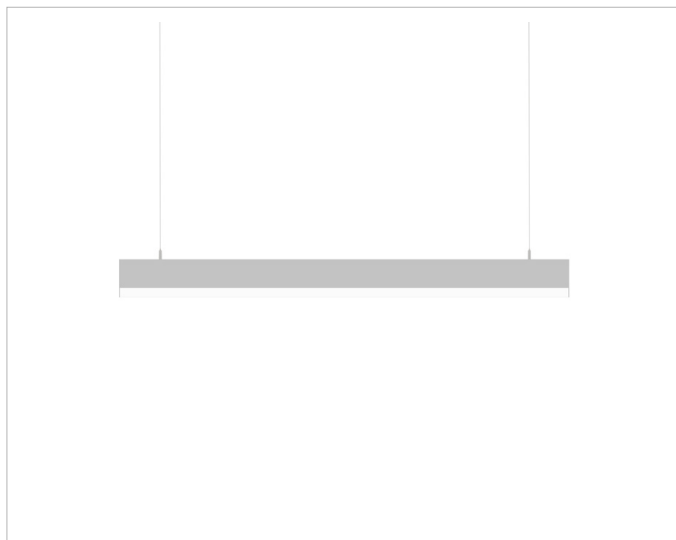

Description

PSL 100, Pendant luminaire, LED 2x34,2W direct light emission, warm white 3000K, CRI >80, 2x5300lm, microprisma cover, incl. power supply and suspension set, suspension length 2500mm, body white

General data

Colour housing:	Aluminium
Degree of protection (IP):	IP20
Lamp holder:	None
Material cover:	Plastic, opal
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light distributor:	Diffuser lens/optic/panel
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	128lm/W
Max. system power:	33W
Rated luminous flux according to IEC 62722-2-1:	4226lm
Reflector:	None
Suitable for number of lamps:	4
Type of grid:	None
Unified Glare Ratio (UGR):	27.80

Electrical data


Exchangeable control gear:	Yes
-----------------------------------	-----



Address/Contact

Pendant luminaire



PSLD100-1200NW70

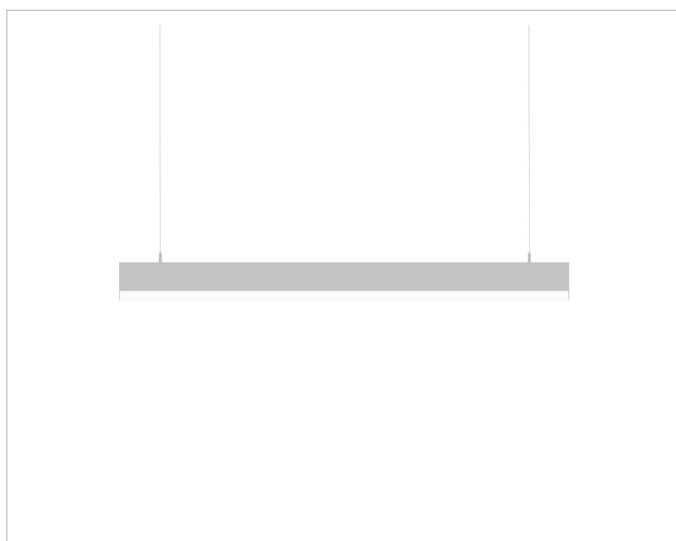

No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	100mm
Length:	1205mm
Pendant length:	3000mm
Width:	45mm

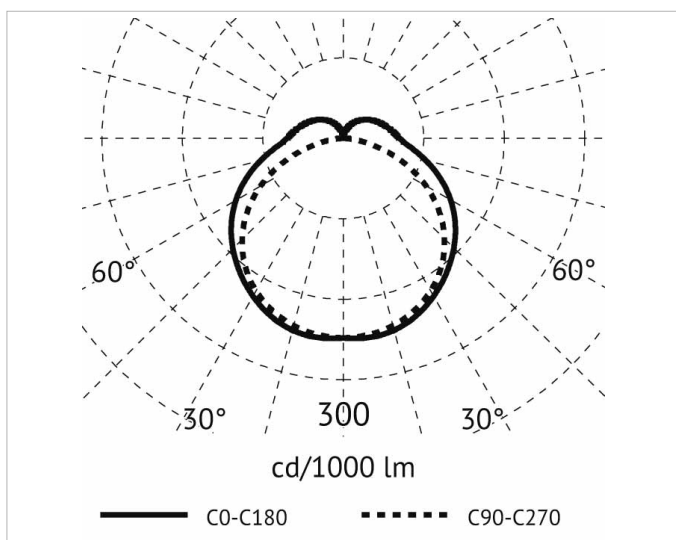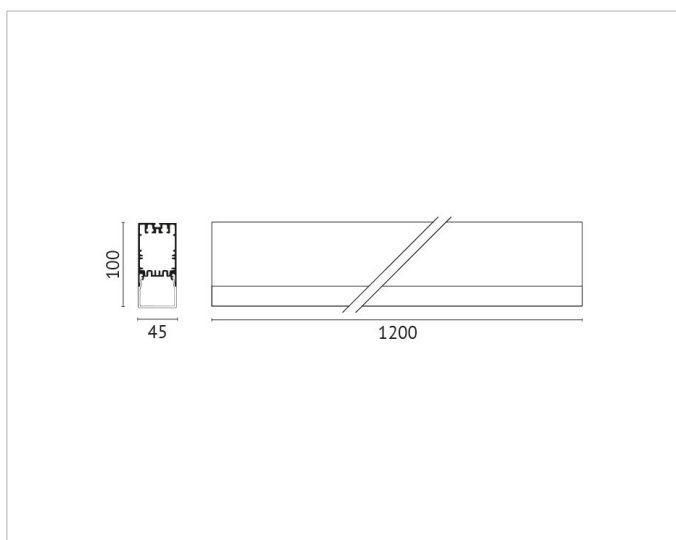

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de