
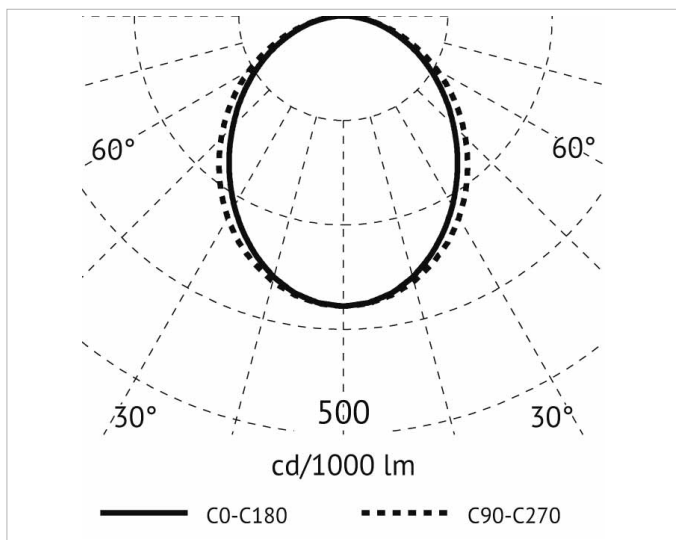


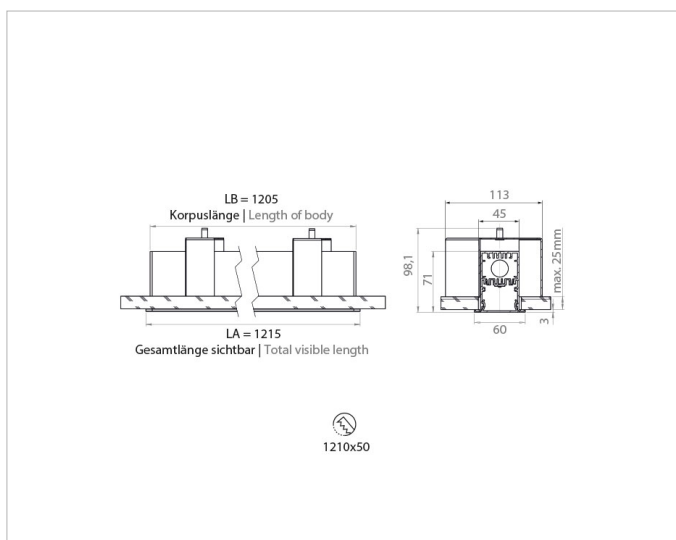

Description

PSL LED recessed mounted linear light fitting, 4000K, CRI >80, PMMA cover, 32W, direct light beam, incl. power supply

General data

Colour housing:	Aluminium
Degree of protection (IP):	IP20
Material housing:	Aluminium
Protection class:	I
Suitable for built-in mounting:	Yes
Suitable for ceiling mounting:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light distributor:	Diffuser lens/optic/panel
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	85lm/W
Max. system power:	32W
Rated luminous flux according to IEC 62722-2-1:	2729lm
Suitable for number of lamps:	4
Unified Glare Ratio (UGR):	25.5

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	220V - 240V





Address/Contact



Voltage type: AC

Product dimensions

Built-in length: 1210mm
Built-in width: 50mm
Height/depth: 98.1mm
Length: 1215mm
Width: 60mm

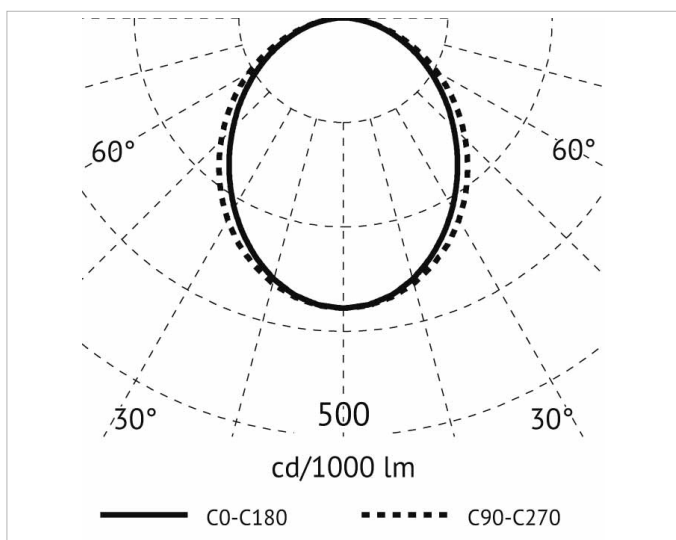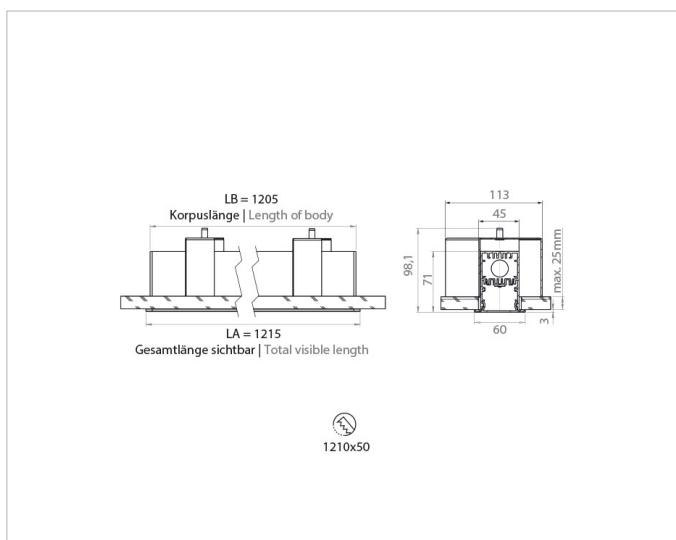

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de