
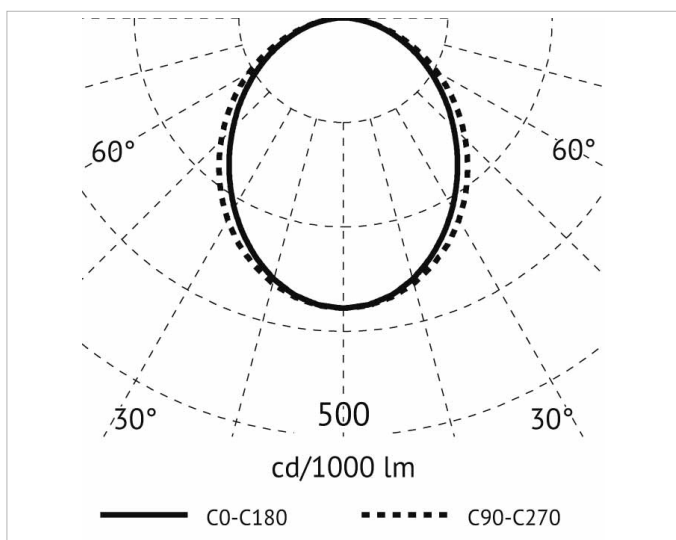


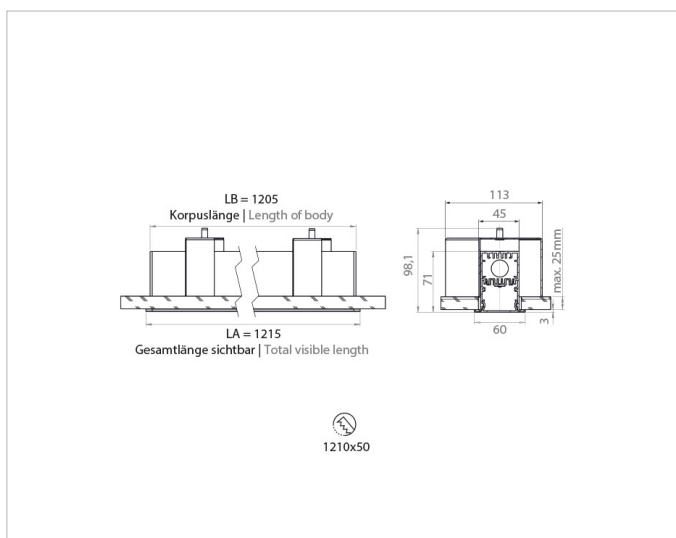

Description

PSL LED recessed mounted linear light fitting, 3000K, CRI >80, PMMA cover, 32W, direct light beam

General data

Colour housing:	Aluminium
Degree of protection (IP):	IP20
Material housing:	Aluminium
Protection class:	I
Suitable for built-in mounting:	Yes
Suitable for ceiling mounting:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light distributor:	Diffuser lens/optic/panel
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	82lm/W
Max. system power:	32W
Rated luminous flux according to IEC 62722-2-1:	2618lm
Suitable for number of lamps:	4
Unified Glare Ratio (UGR):	25.65

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	220V - 240V



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Voltage type:

AC

Product dimensions

Built-in length:

1210mm

Built-in width:

50mm

Height/depth:



98.1mm

Length:

1215mm

Width:

60mm

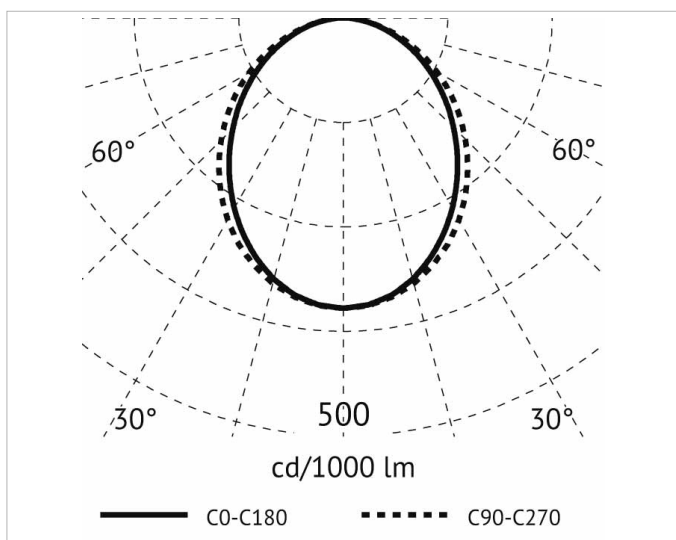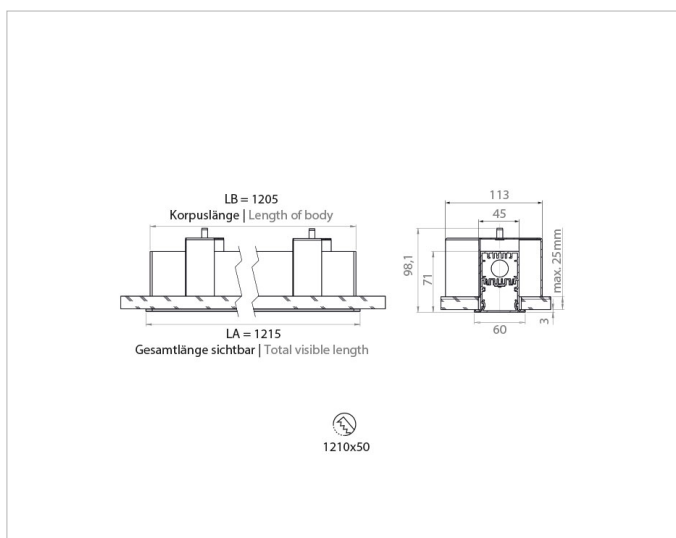

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de