
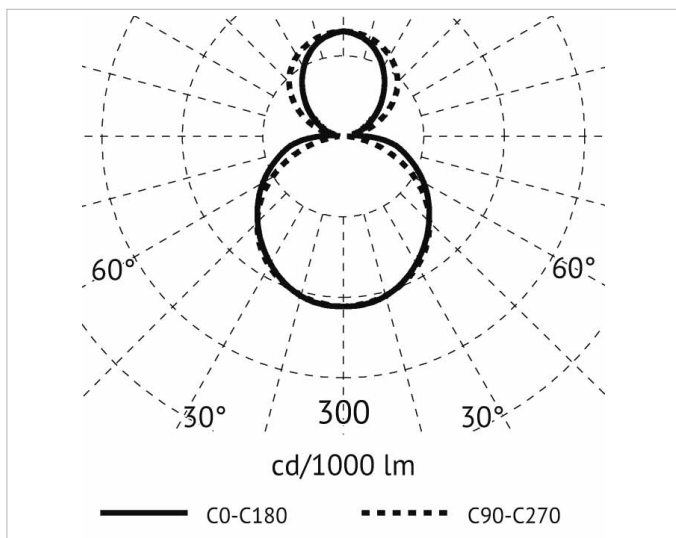
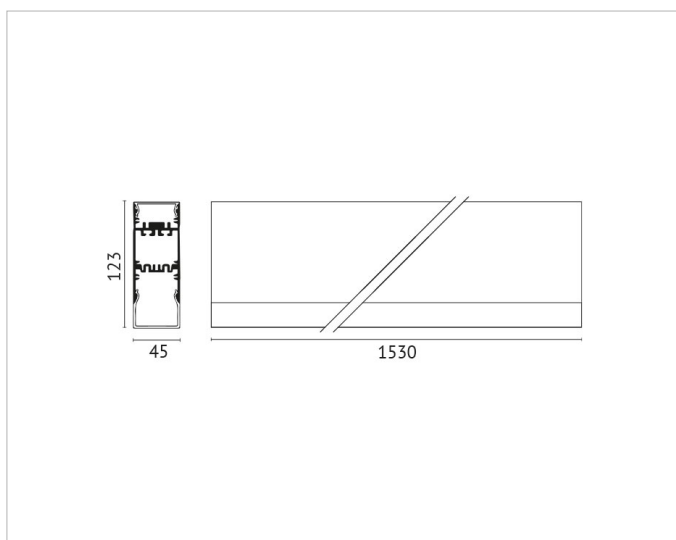


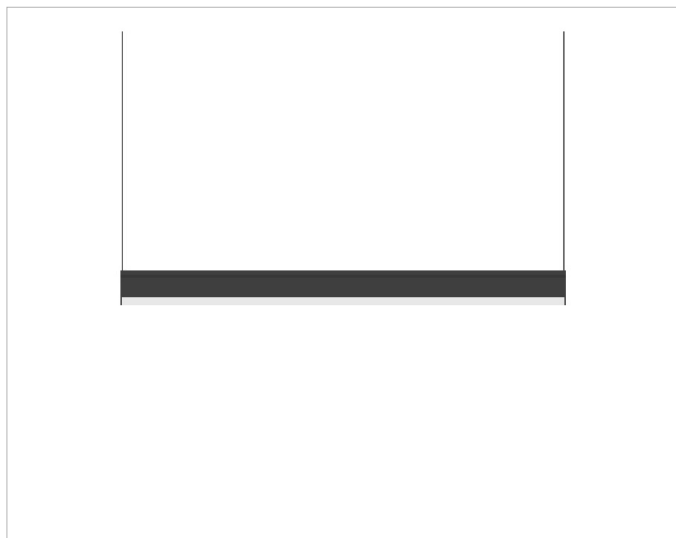

Description

PSLG 123, Pendant luminaire, LED 57W
direct/indirect light emission, 4000K, CRI >80,
opal PMMA diffuser, incl. power supply and
suspension set, suspension length 1530mm, body
black

General data

Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material cover:	Aluminium
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light distributor:	Diffuser lens/optic/panel
Light outlet:	Direct/indirect
Light sharing:	Symmetric
Luminaire efficacy:	106lm/W
Max. system power:	57W
Rated luminous flux according to IEC 62722-2-1:	6030lm
Reflector:	None
Suitable for number of lamps:	8
Type of grid:	None
Unified Glare Ratio (UGR):	22.9


Electrical data

Exchangeable control gear:	Yes
-----------------------------------	-----



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

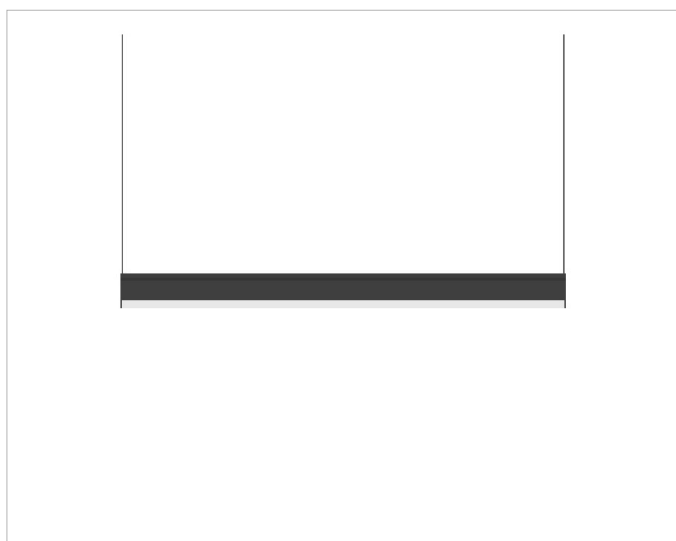

No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	123mm
Length:	1530mm
Pendant length:	3000mm
Width:	45mm

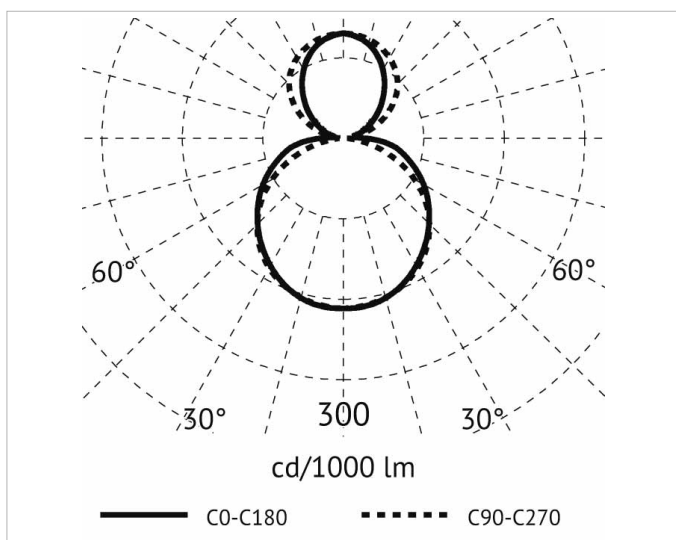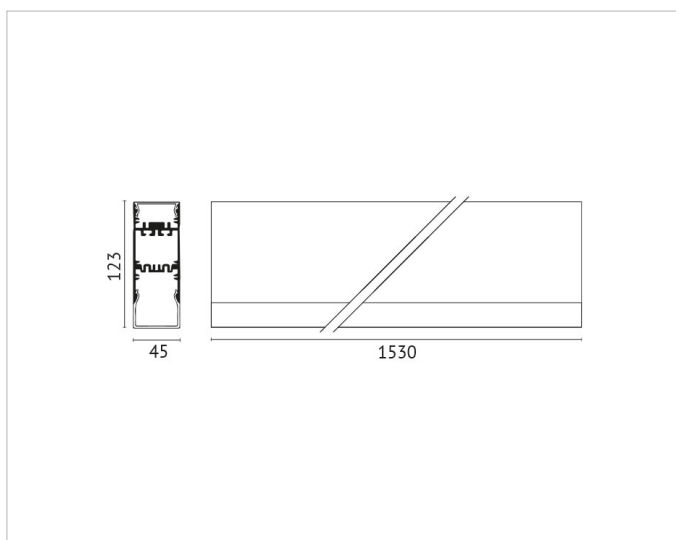

Adress/Contact