
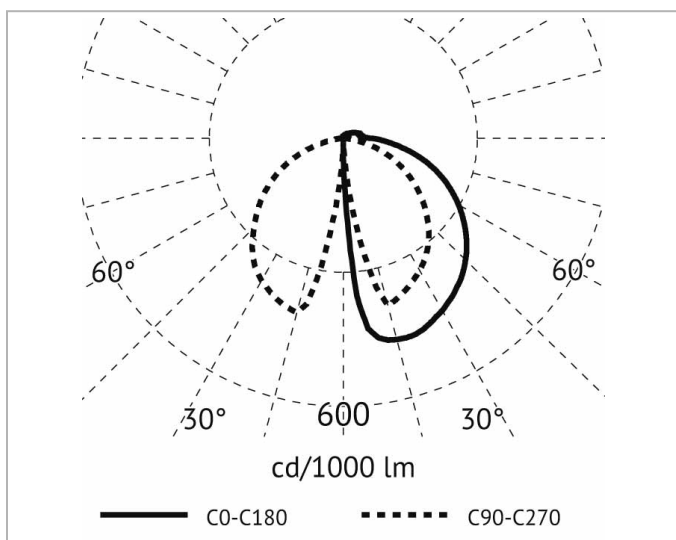


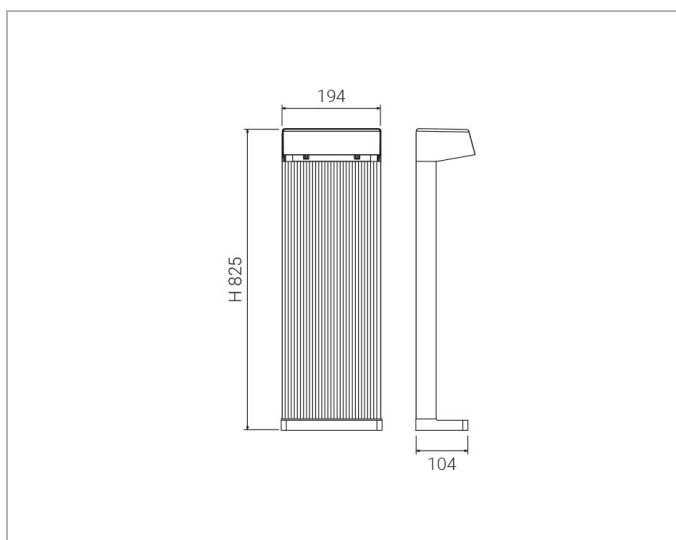

Description

5593AG4K Quantum Alu-post, H=825 mm, complete with LED 13W, CRI 80 + mask, 4000K, 220-240V, IK10, Connection box inside, incl. 230V Driver, UV resistant coating, IP65, aluminiumgrey.

General data

Colour housing:	Grey
Degree of protection (IP):	IP65
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Type of luminaire:	Bollard luminaire
With base plate:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric/asymmetric
Luminaire efficacy:	87lm/W
Max. system power:	13W
Rated luminous flux according to IEC 62722-2-1:	1136lm
Suitable for number of lamps:	1

Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK10
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes





Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Product dimensions

Height/depth:	825mm
Length:	194mm
Width:	104mm

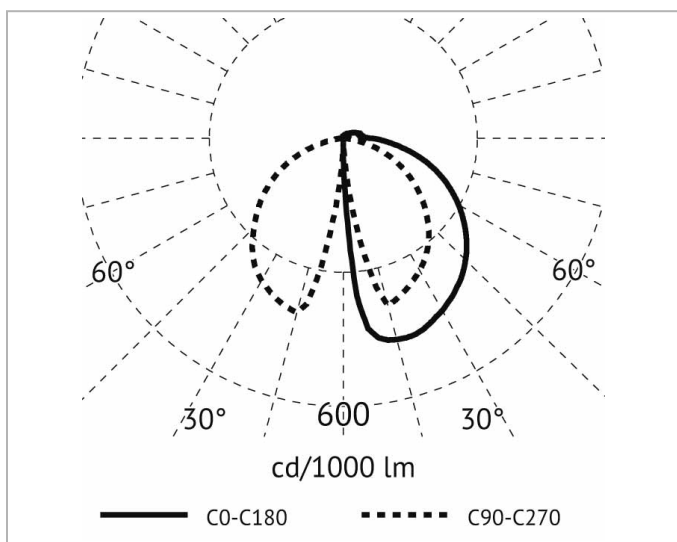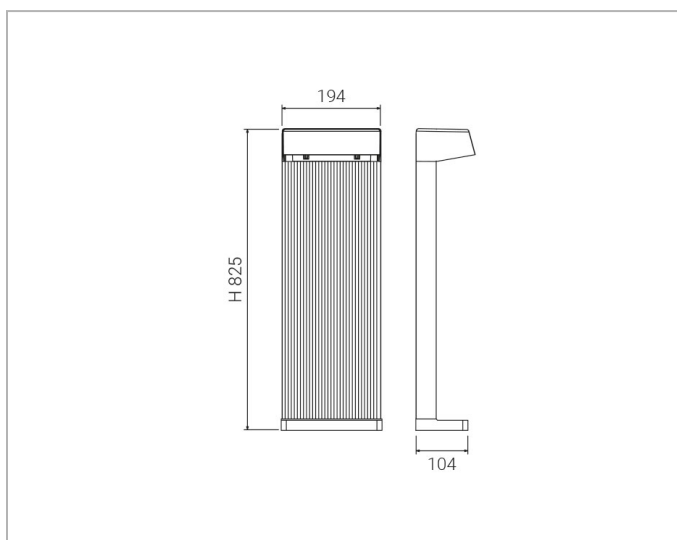

Adress/Contact