
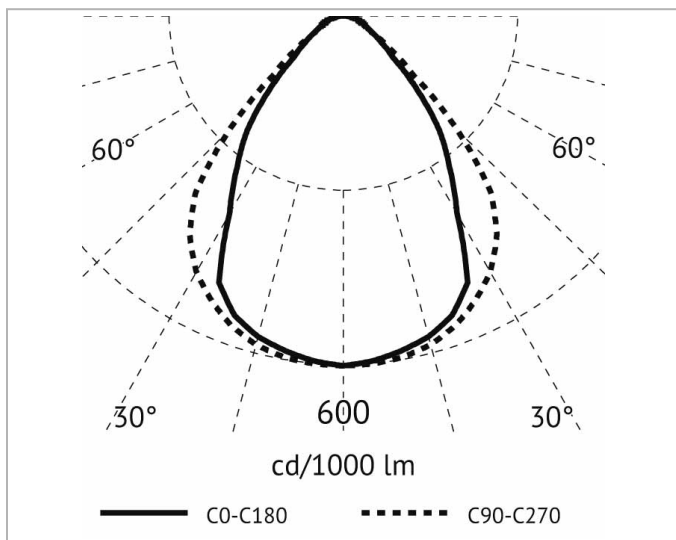


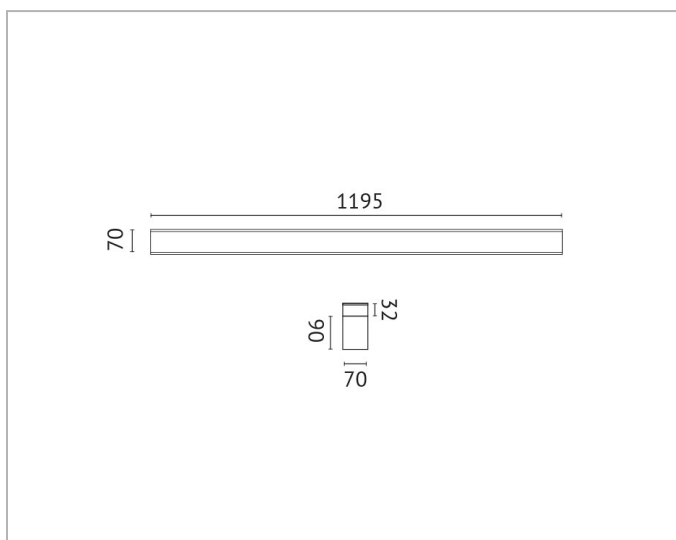

Description

Ceiling mounted light LED, 37W, 6500K, CRI>90, 1195mm, 1-10V port , lateral cable-supply, with interior reflector, with prismatic PMMA cover

General data

Colour housing:	Aluminium
Degree of protection (IP):	IP20
Material housing:	Aluminium
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	6700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	87lm/W
Max. system power:	37W
Rated luminous flux according to IEC 62722-2-1:	3228lm
Suitable for number of lamps:	4
Unified Glare Ratio (UGR):	20.05

Electrical data

Exchangeable control gear:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Ceiling-/wall luminaire

RAF-42SCW7D-1-10V



Product dimensions

Height/depth:	90mm
Length:	1195mm
Width:	70mm

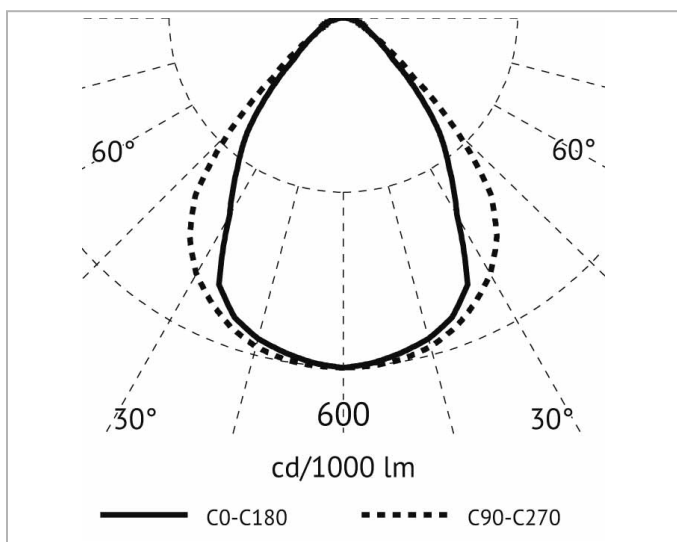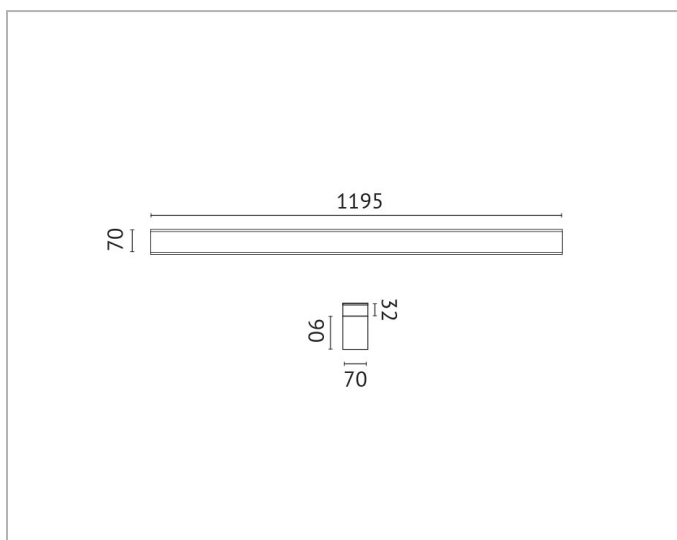

Misprints and errors excepted. Drawings and pictures are sketches. Dimensions and technical data are approximate. Length specifications without unit in millimeters. The Object photos shown are examples of applications independent of the actual effect. We reserve the right to make changes to the range, technology and design (without prior notice). Color deviations are due to printing technology, possible.

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de