
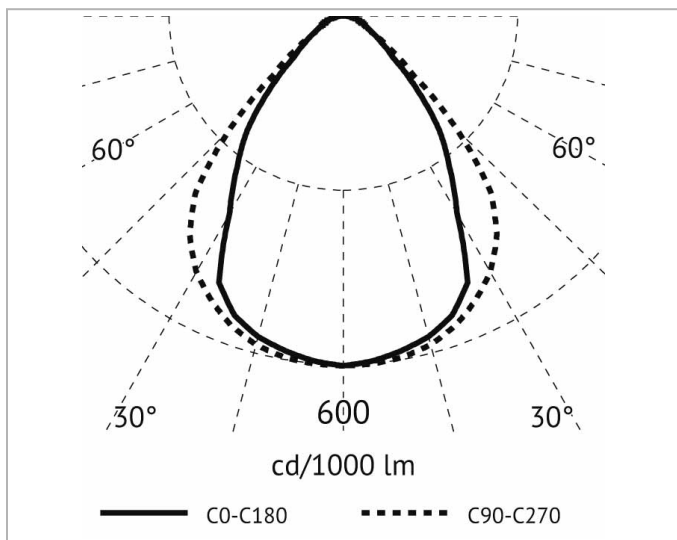


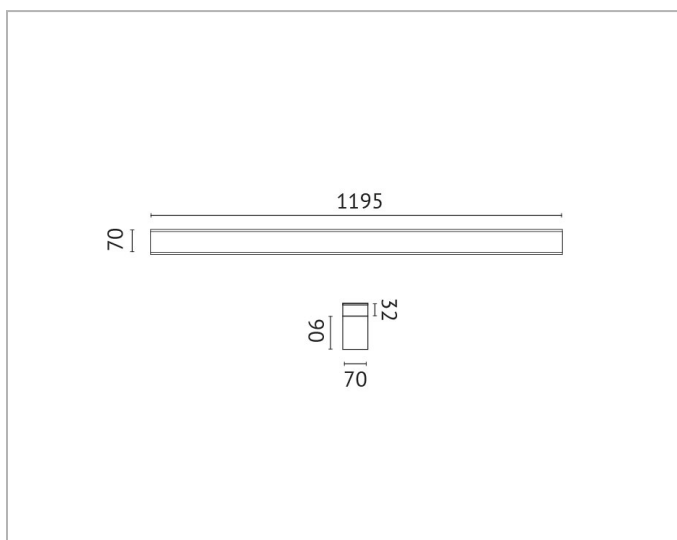

Description

Ceiling mounted light LED, approx. 37W, DALI, 6500K, CRI >90, 1195mm, with button and key switch to shut off the dimm-function, lateral cable-supply, with interior reflector, with prismatic PMMA cover

General data

Colour housing:	Aluminium
Degree of protection (IP):	IP20
Material housing:	Aluminium
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	6700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	87lm/W
Max. system power:	37W
Rated luminous flux according to IEC 62722-2-1:	3228lm
Suitable for number of lamps:	4
Unified Glare Ratio (UGR):	20.05

Electrical data

Exchangeable control gear:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC





Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Product dimensions

Height/depth:	90mm
Length:	1195mm
Width:	70mm

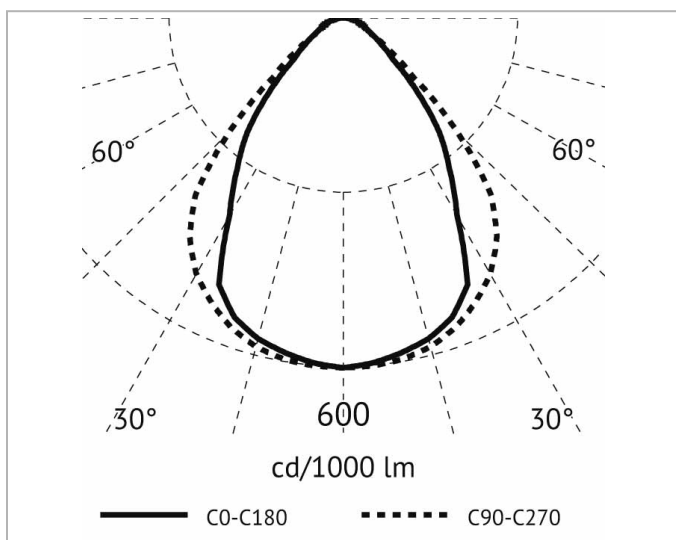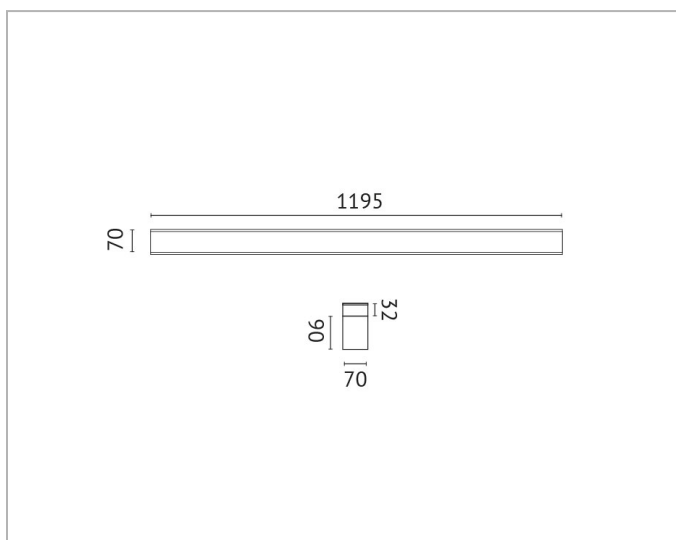

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de