



Description

SKY pole light 140W, 4000K, CRI>80, 220-240V, 50-60Hz, incl. power supply unit, street light optic, overvoltage protection 6/8kV, die-cast aluminum housing, IP66, IK08, spigot size Ø 60mm, anthracite

General data



Colour housing:	Anthracite
Degree of protection (IP):	IP66
Lamp holder:	None
Material housing:	Aluminium
Mounting method:	Post top
Protection class:	II
Surface protection:	Lacquered

Photometric data

Colour consistency (McAdam ellipse):	SDCM6
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Luminaire efficacy:	125lm/W
Max. system power:	143W
Rated luminous flux according to IEC 62722-2-1:	17900lm
Suitable for number of lamps:	1

Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK08
No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

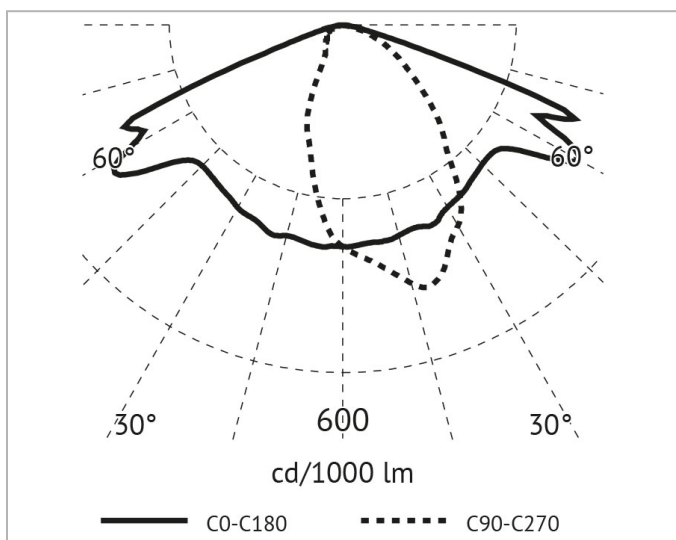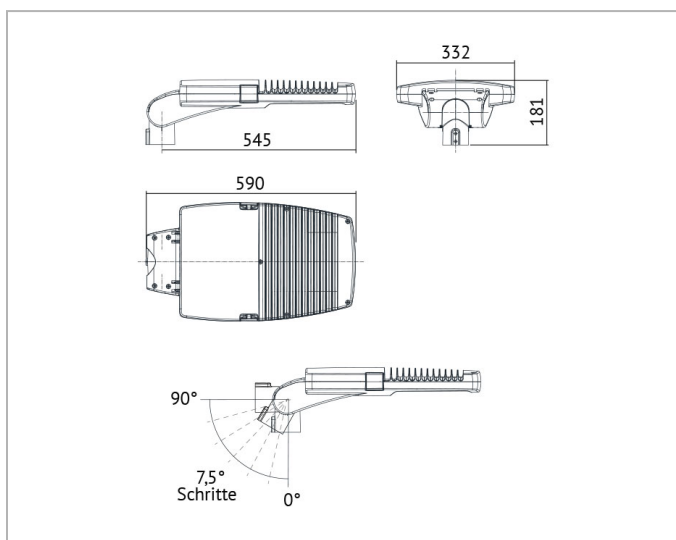



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Product dimensions

Height/depth:	181mm
Length:	590mm
Suitable for spigot size:	60mm
Width:	322mm

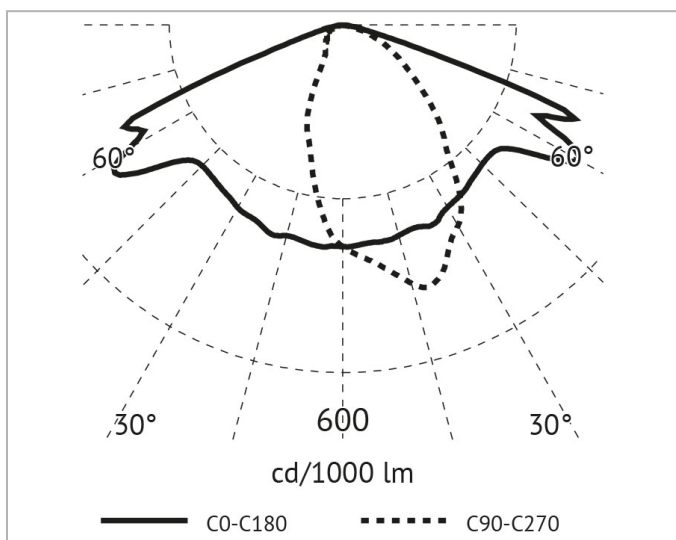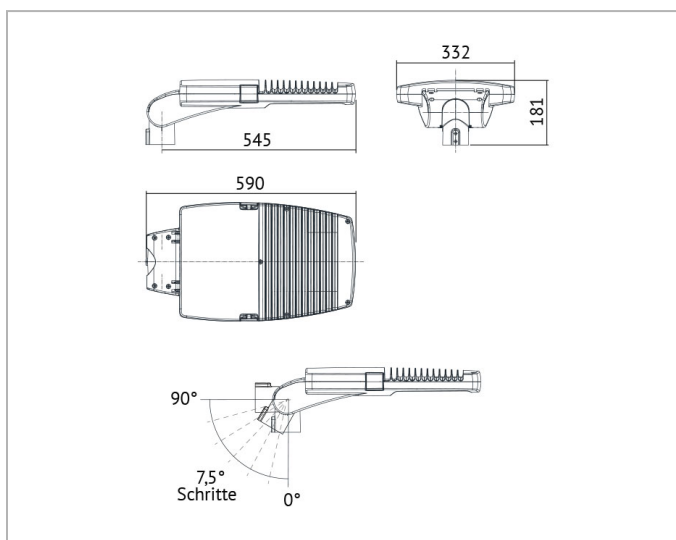

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de