
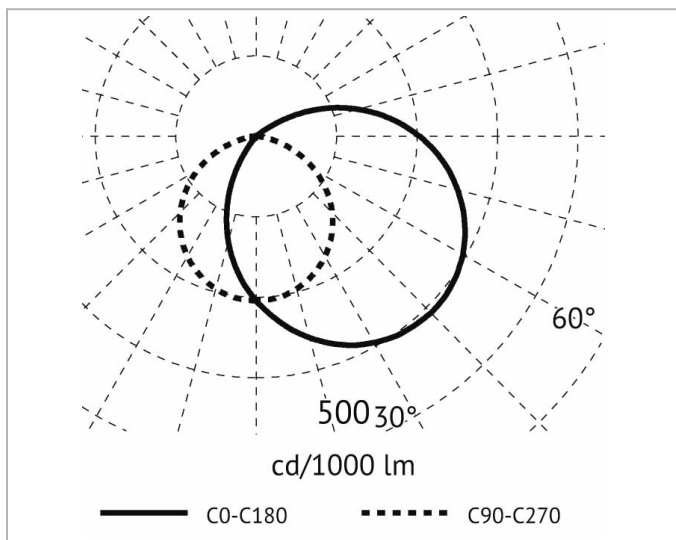


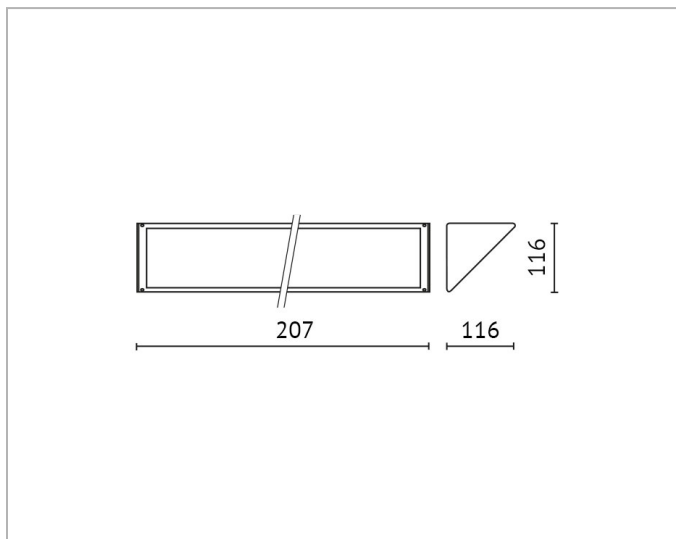

Description

5608AG3K SmallLED 8,5W, 3000K, lineare LED modules 24V constant voltage, IK08, IP665, CRI 85, Life: 60.000 h, Opal diffuser in ultra-white-glass, Driver 230V 50Hz inside, aluminiumgrey

General data

Colour housing:	Grey
Degree of protection (IP):	IP65
Material housing:	Aluminium
Protection class:	II
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Asymmetric
Max. system power:	8.5W

Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK08
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC

Product dimensions

Height/depth:	116mm
Length:	207mm
Width:	116mm



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de