
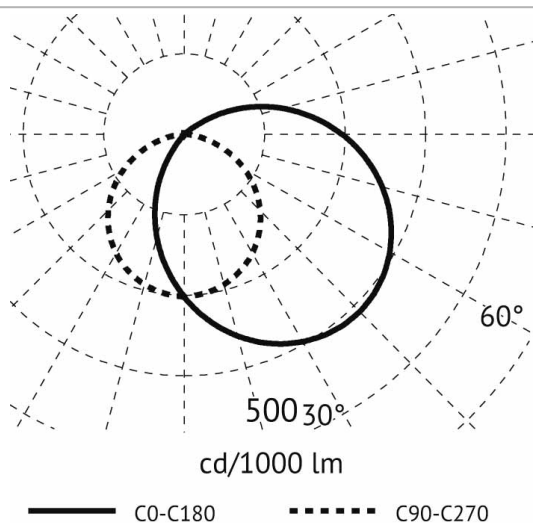


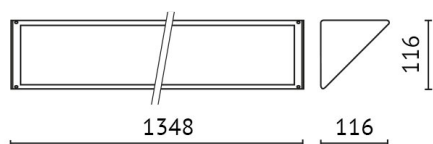

Description

5221NE3K SuperMaxiLED 29W, 3000K, l=1348mm, lineare LED modules 24V constant voltage, IK10, IP65, CRI 80, Life: 60.000 h, opal diffuser in polycarbonate, Driver 230V 50Hz inside, black

General data

Colour housing:	Black
Degree of protection (IP):	IP65
Material housing:	Aluminium
Protection class:	II
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Asymmetric
Max. system power:	29W

Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK08
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC

Product dimensions

Height/depth:	116mm
Length:	1007mm
Width:	116mm



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de