




## Description

SOFIA spike H800 , 3000K, 10W, alu-die-cast, IP65 solid white, 360°, integrated power supply, CRI>80


## General data

|                                   |                   |
|-----------------------------------|-------------------|
| <b>Colour housing:</b>            | White             |
| <b>Degree of protection (IP):</b> | IP65              |
| <b>Lamp holder:</b>               | None              |
| <b>Material housing:</b>          | Aluminium         |
| <b>Protection class:</b>          | I                 |
| <b>Type of luminaire:</b>         | Bollard luminaire |
| <b>With base plate:</b>           | Yes               |

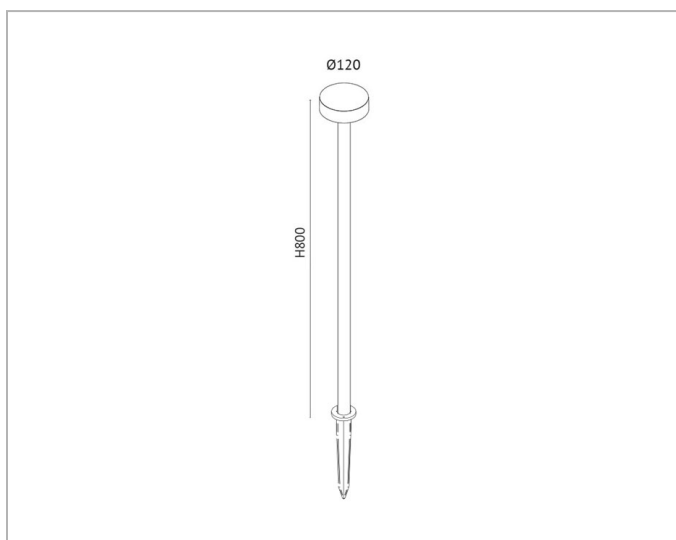

## Photometric data

|                                                        |                        |
|--------------------------------------------------------|------------------------|
| <b>Beam angle:</b>                                     | Extreme wide beam >80° |
| <b>Colour of light:</b>                                | White                  |
| <b>Colour rendering index CRI:</b>                     | 80-89                  |
| <b>Colour temperature:</b>                             | 3000K                  |
| <b>Light outlet:</b>                                   | Direct                 |
| <b>Light sharing:</b>                                  | Symmetric              |
| <b>Luminaire efficacy:</b>                             | 96lm/W                 |
| <b>Max. system power:</b>                              | 12W                    |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 1152lm                 |

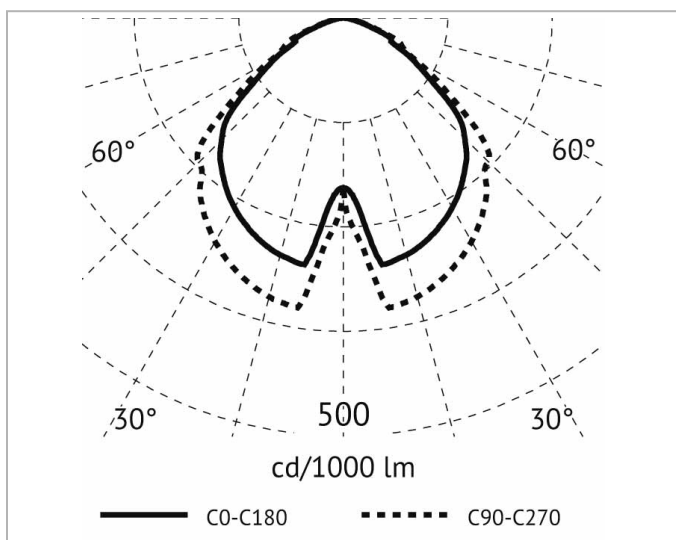

## Electrical data

|                           |             |
|---------------------------|-------------|
| <b>Impact strength:</b>   | IK07        |
| <b>Nominal voltage:</b>   | 220V - 240V |
| <b>Voltage type:</b>      | AC          |
| <b>With control gear:</b> | Yes         |

## Product dimensions

|                      |       |
|----------------------|-------|
| <b>Diameter:</b>     | 120mm |
| <b>Height/depth:</b> | 800mm |

## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de