
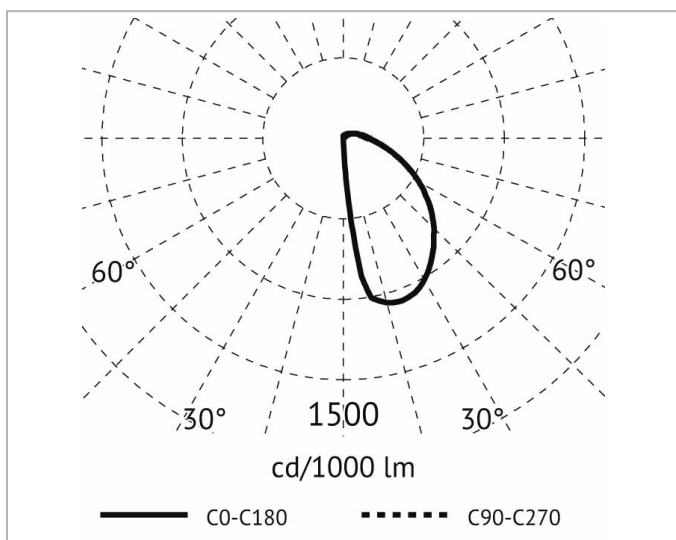


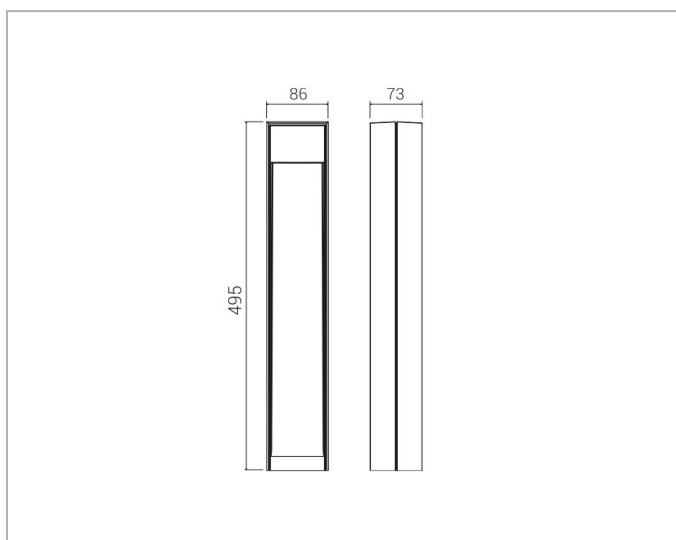

Description

5526AG4K STANDING Alu-post, 8,7W, CRI 80, 4000K neutral white, 230V, IK10, incl. 230V Driver, UV resistant coating, IP65, aluminiumgrey

General data

Colour housing:	Grey
Degree of protection (IP):	IP65
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Type of luminaire:	Bollard luminaire
With base plate:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Asymmetric
Luminaire efficacy:	64lm/W
Max. system power:	8.7W
Rated luminous flux according to IEC 62722-2-1:	554lm

Electrical data

Impact strength:	IK10
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	496mm
Length:	86mm
Width:	73mm



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de