
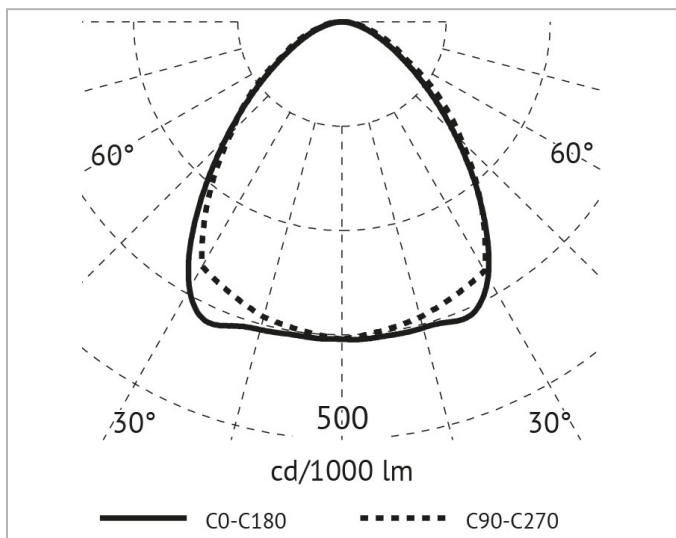


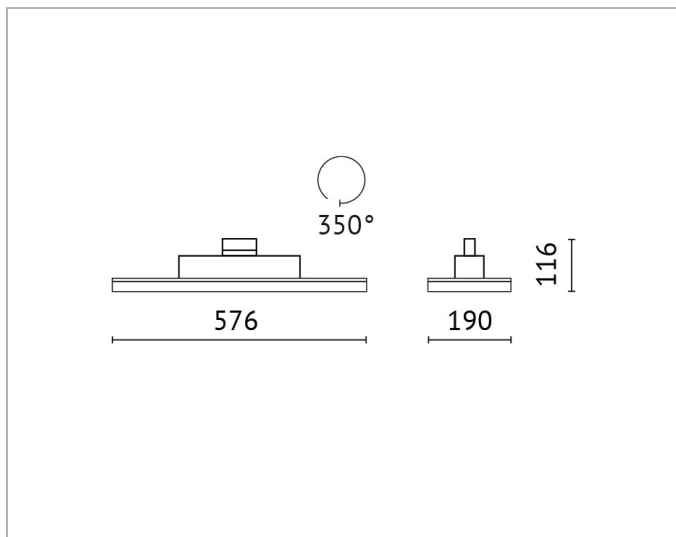

## Description

Flat panel LED luminaire for track, 3-phase adapter black, 62W, 4000K, CRI90, 220-240V AC, L:576mm, integrated LED Osram power supply unit, beam angle: 90°, black

## General data

|                                           |                         |
|-------------------------------------------|-------------------------|
| <b>Adjustability:</b>                     | Rotating and swivelling |
| <b>Colour housing:</b>                    | Black                   |
| <b>Degree of protection (IP):</b>         | IP20                    |
| <b>Lamp holder:</b>                       | None                    |
| <b>Material housing:</b>                  | Aluminium               |
| <b>Protection class:</b>                  | I                       |
| <b>Suitable for light-track mounting:</b> | Yes                     |
| <b>Surface protection:</b>                | Powder coating          |

## Photometric data

|                                                        |                        |
|--------------------------------------------------------|------------------------|
| <b>Beam angle:</b>                                     | Extreme wide beam >80° |
| <b>Colour of light:</b>                                | White                  |
| <b>Colour rendering index CRI:</b>                     | 90-100                 |
| <b>Colour temperature:</b>                             | 4000K                  |
| <b>Light outlet:</b>                                   | Direct                 |
| <b>Light sharing:</b>                                  | Symmetric              |
| <b>Luminaire efficacy:</b>                             | 135lm/W                |
| <b>Luminous flux:</b>                                  | 8364lm                 |
| <b>Max. system power:</b>                              | 62W                    |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 8364lm                 |
| <b>Suitable for number of lamps:</b>                   | 1                      |

## Electrical data

|                                   |                |
|-----------------------------------|----------------|
| <b>Connection type:</b>           | Busbar adapter |
| <b>Exchangeable control gear:</b> | Yes            |
| <b>No dim function:</b>           | Yes            |

## Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de



**Nominal voltage:** 220V - 240V  
**Voltage type:** AC  
**With control gear:** Yes

**Product dimensions**

**Height/depth:** 116mm  
**Length:** 576mm  
**Width:** 190mm

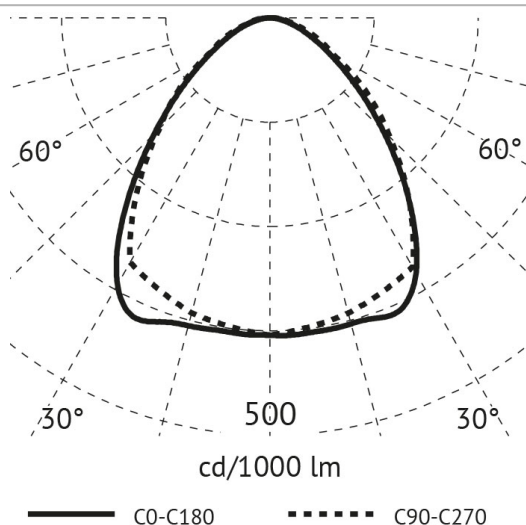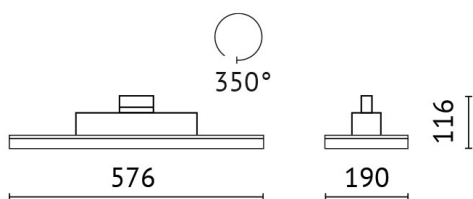

**Adress/Contact**

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)