
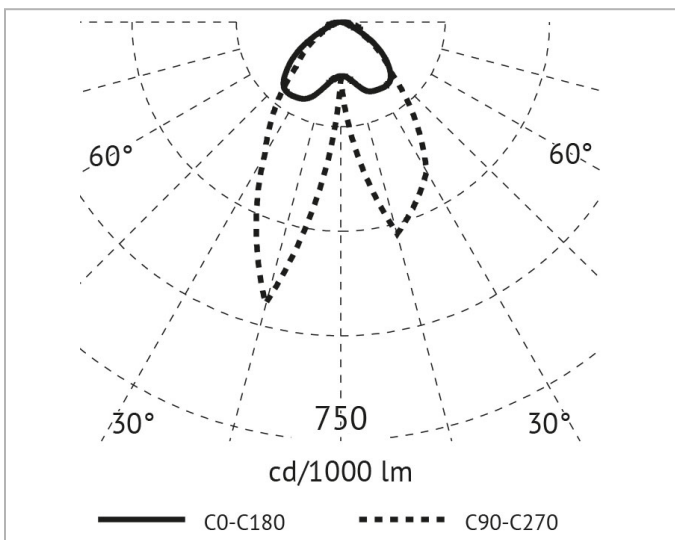


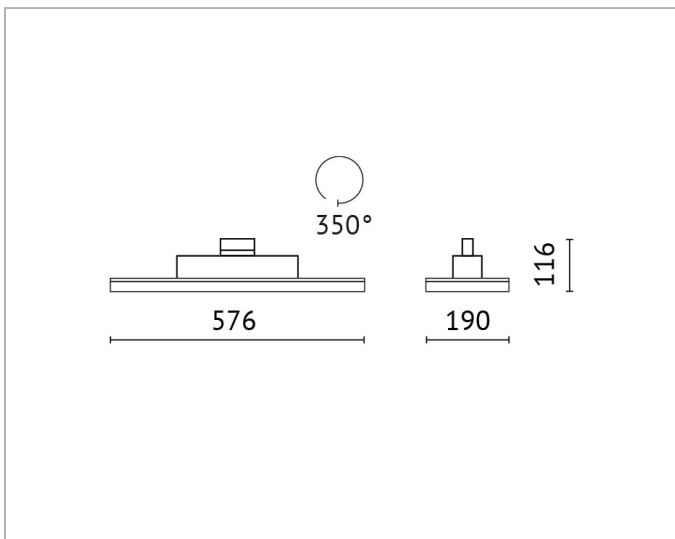

Description

Flat panel LED luminaire for track, 3-phase adapter black, 78W, 4000K, CRI90, L:576mm, integrated LED Osram power supply unit, beam angle: double asymmetrical 20°, black

General data

Adjustability:	Rotating and swivelling
Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Narrow beam 11 - 20°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Double asymmetric
Luminaire efficacy:	137lm/W
Luminous flux:	10691lm
Max. system power:	78W
Rated luminous flux according to IEC 62722-2-1:	10691lm
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
Exchangeable control gear:	Yes
No dim function:	Yes

Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Nominal voltage: 220V - 240V
Voltage type: AC
With control gear: Yes

Product dimensions

Height/depth: 116mm
Length: 576mm
Width: 190mm

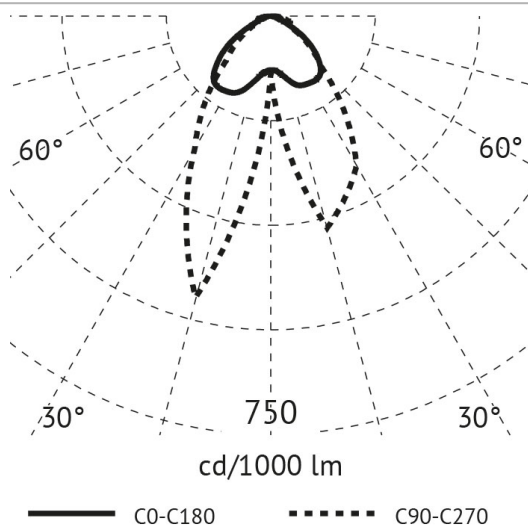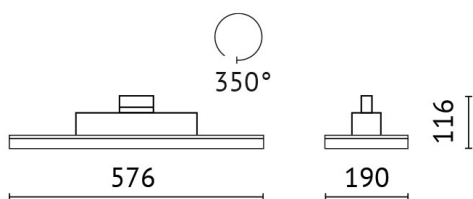

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de