

TRIANGOLO



- LED Pollerleuchte
- Gehäuse aus Aluminiumdruckguss
- 2 Versionen (Standard, Notlicht)
- Oberflächenbehandlung von Aluminium: Beizen + Phosphorchromatieren + Epoxidgrundierung + Lackierung mit UV-stabilisiertem Epoxidpulver
- Erhältlich in den Farben anthrazit und aluminiumgrau
- Schutzart: IP65
- Schutzklasse: II
- Integriertes elektronisches Versorgungsteil

Auf Anfrage

- Ausstrahlwinkel 38° und 120°

- LED bollard luminaire
- Body of die-cast aluminium
- 2 versions (standard, emergency)
- Surface treatment of aluminium: pickling + phosphorus chromate + epoxy coating + varnish with UV-stabilized epoxy powder
- Housing colors anthracite and aluminium grey
- Protection Rating: IP65
- Protection Class: II
- Built-in electronic power supply


On request

- Beam angle 38° and 120°

TRIANGOLO
LED Wand- und Deckenleuchte | LED wall and ceiling mounted luminaire
230V/50Hz / CRI >80



Opal Glas | Opal glass

	∧ 90°	Standard		34,5 W
	4000 K	● TR-34NW6F	● TR-34NW7F	1684 lm
	3000 K	● TR-34WW6F	● TR-34WW7F	1684 lm
	∧ 90°	3h Notlichtfunktion 3h emergency light		34,5 W
	4000 K	● TRN-34NW6F	● TRN-34NW7F	1684 lm
	3000 K	● TRN-34WW6F	● TRN-34WW7F	1684 lm




Gefrästes und gehärtetes Glas | Milled and tempered glass

	∧ 25°			53 W
	4000 K	● TR-50NW6S	● TR-50NW7S	5608 lm
	3000 K	● TR-50WW6S	● TR-50WW7S	5608 lm
	∧ 100°			53 W
	4000 K	● TR-50NW6F	● TR-50NW7F	5466 lm
	3000 K	● TR-50WW6F	● TR-50WW7F	5466 lm
	∧ Doppelasymmetrisch Double asymmetric			53 W
	4000 K	● TR-50NW6BAT	● TR-50NW7BAT	5646 lm
	3000 K	● TR-50WW6BAT	● TR-50WW7BAT	5646 lm

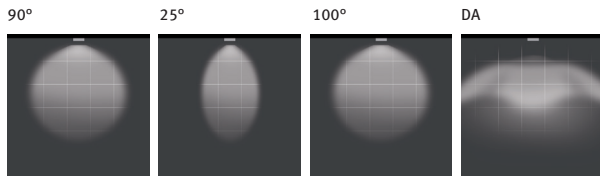

Zubehör | Accessories




Mast | Post

● **C-TR-11006**

Mast aus extrudiertem Aluminium. Pfahlanschluss und Bodenplatte aus druckgegossenem Aluminium. Eine zweite Leuchte kann installiert werden. In die Rückseite des Mastes eingelassene Abzweigdose mit Sicherungshalter. Das Unterteil des Fußes ist aus Gummi, korrosionsbeständig. UV-sichere, stabilisierte Oberflächenbehandlung korrosionsbeständig.

Nur Mast, Triangolo Leuchte muss separat bestellt werden.

Post in extruded aluminium. Top cover and base in die-cast aluminium. A second Triangolo can be installed as well. Recessed junction box included, complete with fuse-holder. Rubber plate against corrosion under the base. UV and corrosion resistant finish. Post only, Triangolo fitting has to be ordered separately.



● Anthrazit | Anthracite

● Aluminiumgrau | Aluminium grey

