
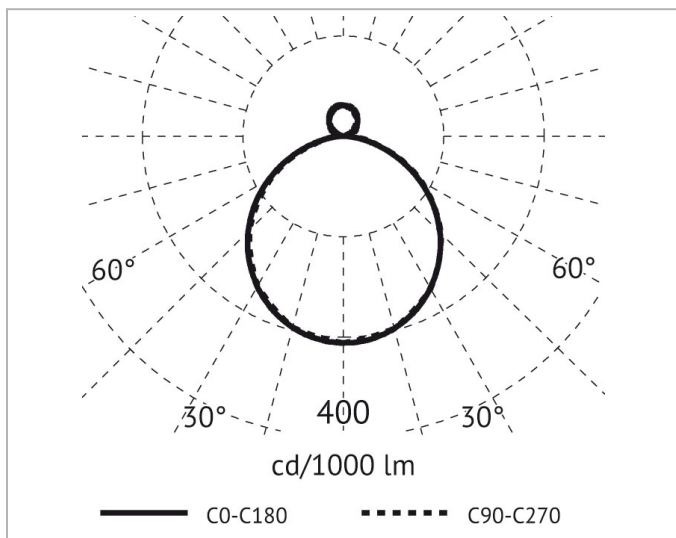


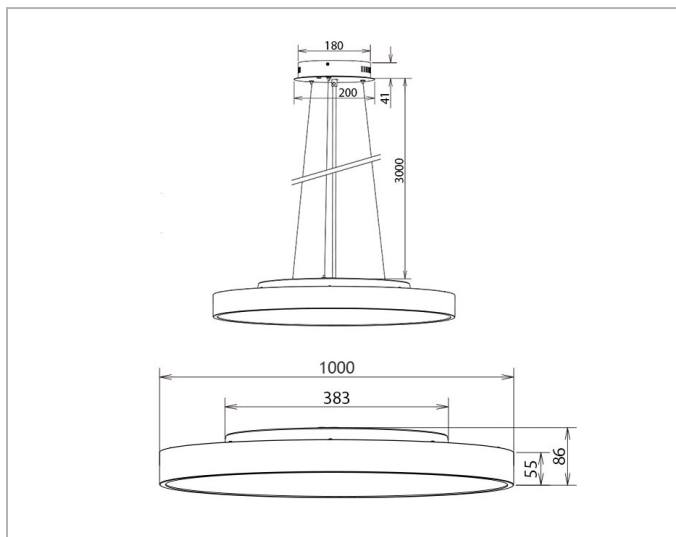

Description

UAL, Wall-/Ceiling luminaire round, LED 95W, color changeable 3000K/4000K, 220-240AC, CRI80, 120°, Ø1000mm, height 86mm, incl. OSRAM driver, opal PMMA diffuser, IP40, black, DALI

General data



Colour housing:	Black
Degree of protection (IP):	IP40
Lamp holder:	None
Material cover:	Plastic, opal
Material housing:	Aluminium
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes
Surface protection housing:	Powder coating

Photometric data

Beam angle:	Extreme wide beam >80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K - 4000K
Colour temperature adjustable:	Positions
Light distributor:	None
Light outlet:	Direct/indirect
Light sharing:	Symmetric
Luminaire efficacy:	105lm/W
Max. system power:	95W
Rated luminous flux according to IEC 62722-2-1:	10002lm

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

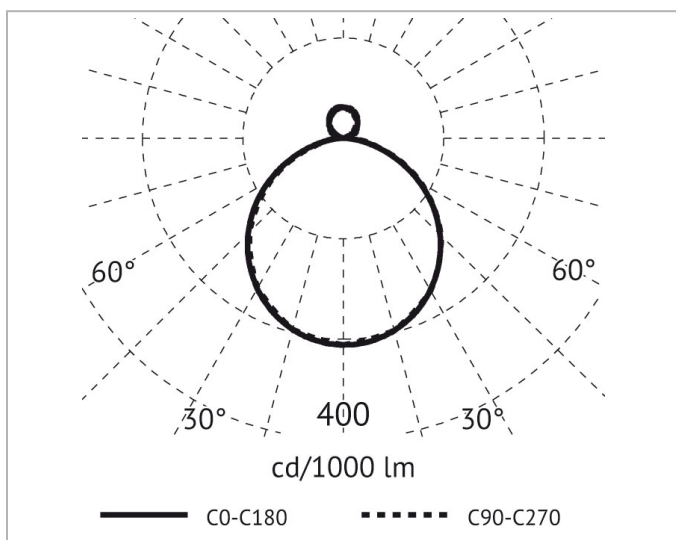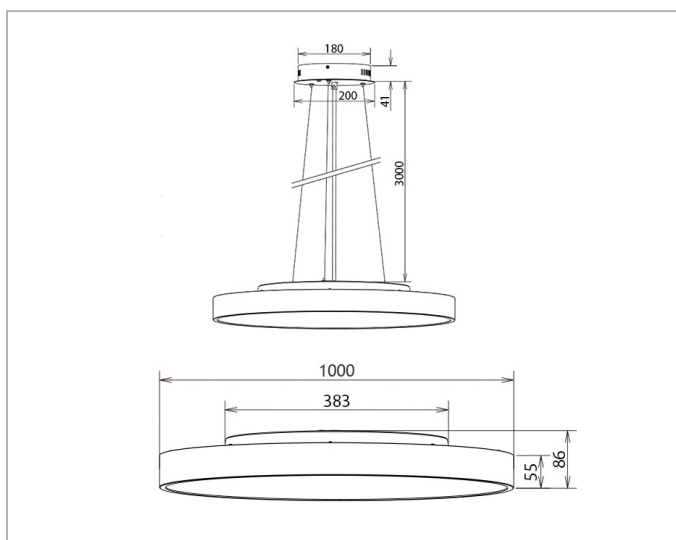

Suitable for number of lamps:

5

Type of grid:

None

Unified Glare Ratio (UGR):

19.45

Electrical data

Dimming DALI:

Yes

Exchangeable control gear:

Yes

No dim function:

Yes

Nominal current:

693mA

Nominal voltage:

220V - 240V

Type of control gear:

LED operating device
current-controlled

Voltage type:

AC

With control gear:

Yes

Product dimensions

Height/depth:

86mm

Outer diameter:

1000mm

Address/Contact