
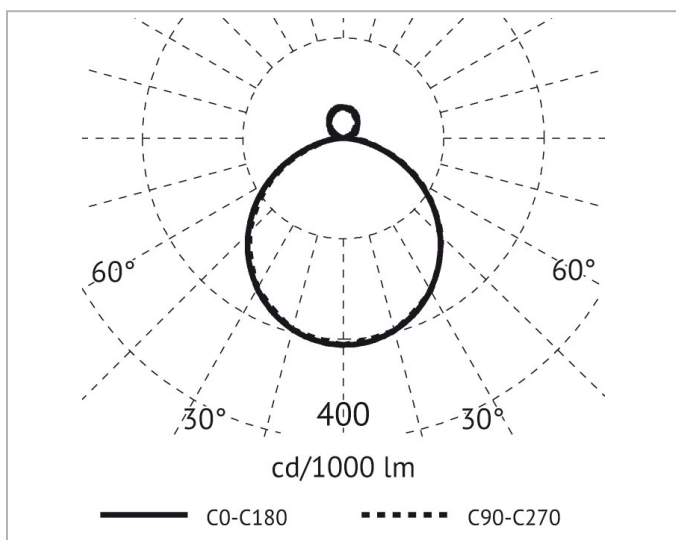


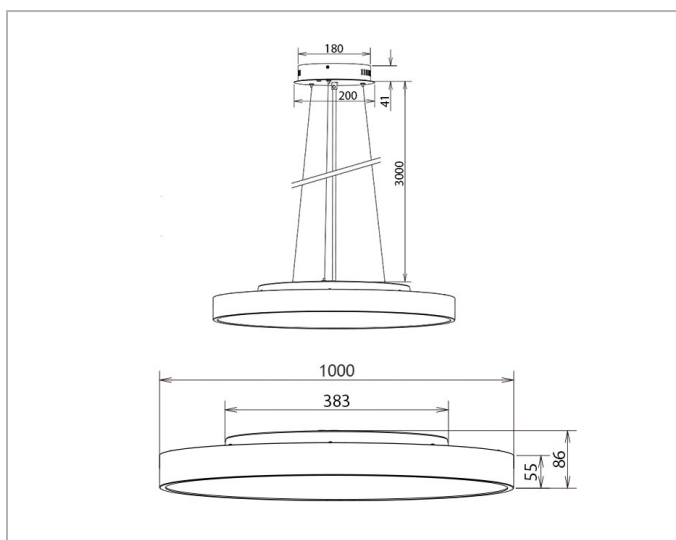

Description

UAL, Pendant luminaire, round, LED 95W, color changeable 3000K/4000K, 220-240AC, CRI80, 120°, Ø1000mm, height 86mm, incl. OSRAM driver, rope suspension included, opal PMMA diffuser, IP40, black, , DALI

General data

Colour housing:	Black
Degree of protection (IP):	IP40
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K - 4000K
Colour temperature adjustable:	Positions
Light distributor:	None
Light outlet:	Direct/indirect
Light sharing:	Symmetric
Luminaire efficacy:	105lm/W
Max. system power:	95W
Rated luminous flux according to IEC 62722-2-1:	10002lm
Reflector:	None
Suitable for number of lamps:	5
Type of grid:	None
Unified Glare Ratio (UGR):	19.45



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Pendant luminaire

UAL-100WWNW32-DD





Electrical data

Dimming DALI:	Yes
Exchangeable control gear:	Yes
No dim function:	Yes
Nominal current:	693mA
Nominal voltage:	220V - 240V
Type of control gear:	LED operating device current-controlled
Voltage type:	AC
With control gear:	Yes

Product dimensions

Diameter:	1000mm
Height/depth:	86mm
Pendant length:	3000mm

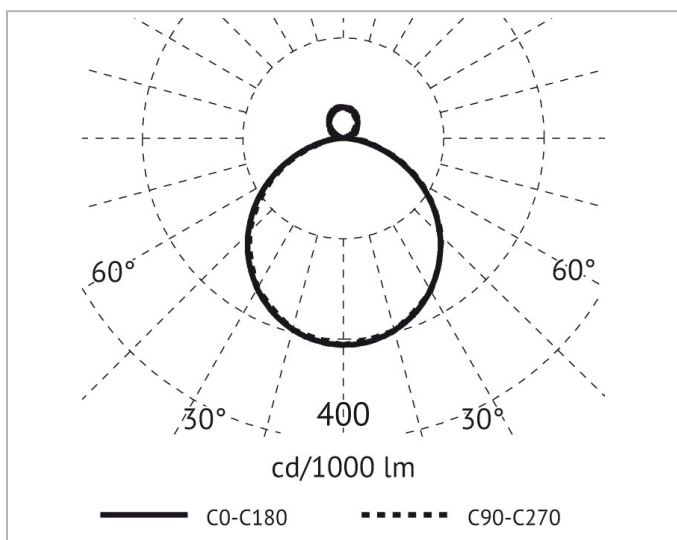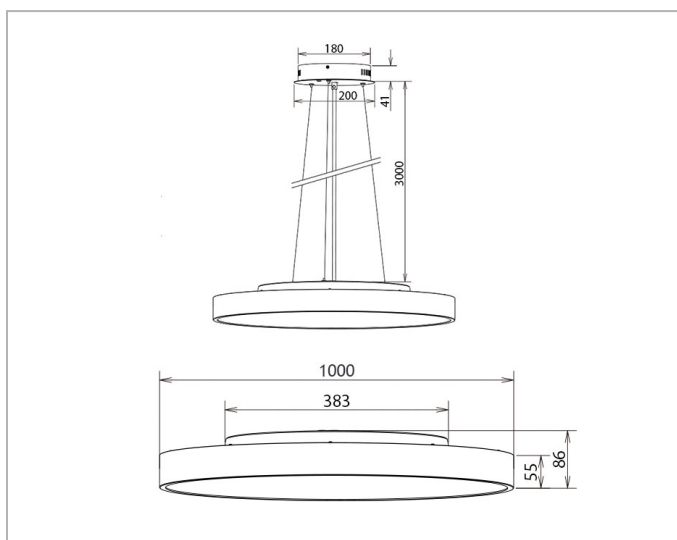

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de