
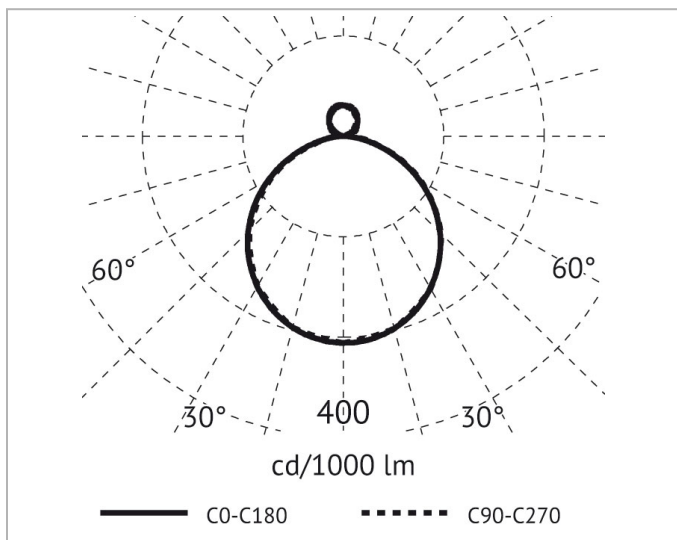


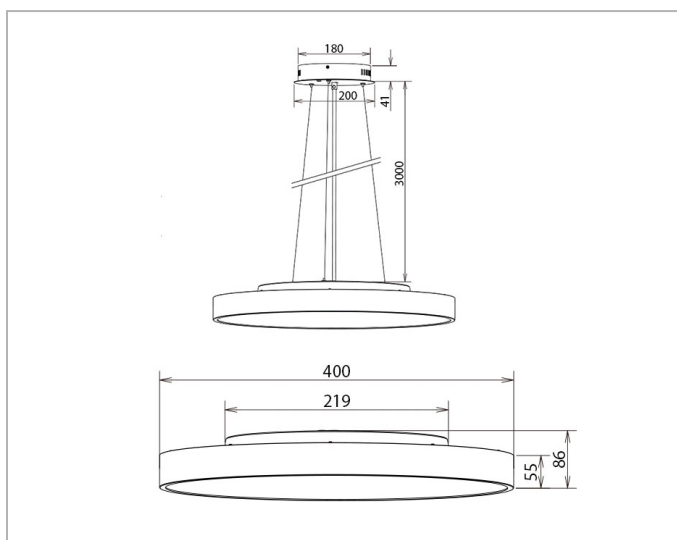

### Description

UAL, Pendant-/Ceiling luminaire round, LED, 37W, color changeable 3000K/4000K, 220-240AC, CRI>80, 120°, Ø400mm, height 86mm, incl. OSRAM driver, rope suspension included, opal PMMA diffuser, IP40, black

### General data

|                                   |           |
|-----------------------------------|-----------|
| <b>Colour housing:</b>            | Black     |
| <b>Degree of protection (IP):</b> | IP40      |
| <b>Lamp holder:</b>               | None      |
| <b>Material cover:</b>            | Aluminium |
| <b>Material housing:</b>          | Aluminium |
| <b>Protection class:</b>          | I         |
| <b>With suspension:</b>           | Yes       |

### Photometric data

|                                                        |                 |
|--------------------------------------------------------|-----------------|
| <b>Colour consistency (McAdam ellipse):</b>            | SDCM3           |
| <b>Colour of light:</b>                                | White           |
| <b>Colour rendering index CRI:</b>                     | 80-89           |
| <b>Colour temperature:</b>                             | 3000K - 4000K   |
| <b>Colour temperature adjustable:</b>                  | Positions       |
| <b>Light distributor:</b>                              | None            |
| <b>Light outlet:</b>                                   | Direct/indirect |
| <b>Light sharing:</b>                                  | Symmetric       |
| <b>Luminaire efficacy:</b>                             | 107lm/W         |
| <b>Max. system power:</b>                              | 37W             |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 3965lm          |
| <b>Reflector:</b>                                      | None            |
| <b>Suitable for number of lamps:</b>                   | 5               |
| <b>Type of grid:</b>                                   | None            |
| <b>Unified Glare Ratio (UGR):</b>                      | 22.55           |



### Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de

# Pendant luminaire

## UAL-35WWNW32





### Electrical data

|                                   |                                            |
|-----------------------------------|--------------------------------------------|
| <b>Exchangeable control gear:</b> | Yes                                        |
| <b>No dim function:</b>           | Yes                                        |
| <b>Nominal current:</b>           | 800mA                                      |
| <b>Nominal voltage:</b>           | 220V - 240V                                |
| <b>Type of control gear:</b>      | LED operating device<br>current-controlled |
| <b>Voltage type:</b>              | AC                                         |
| <b>With control gear:</b>         | Yes                                        |

### Product dimensions

|                        |        |
|------------------------|--------|
| <b>Diameter:</b>       | 400mm  |
| <b>Height/depth:</b>   | 86mm   |
| <b>Pendant length:</b> | 3000mm |

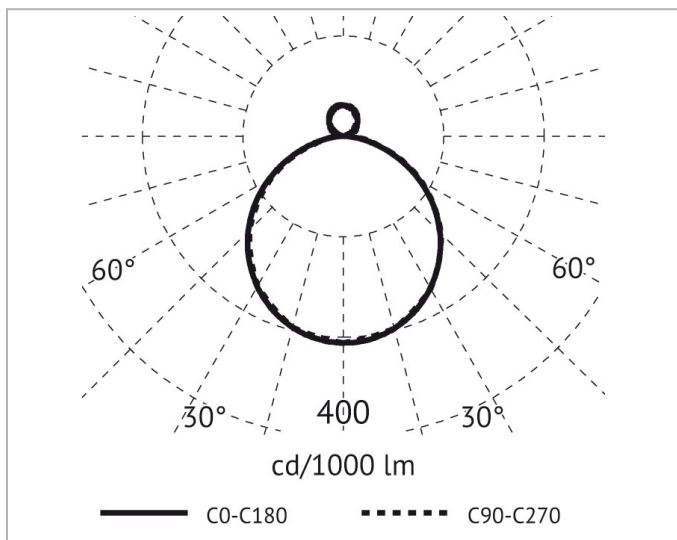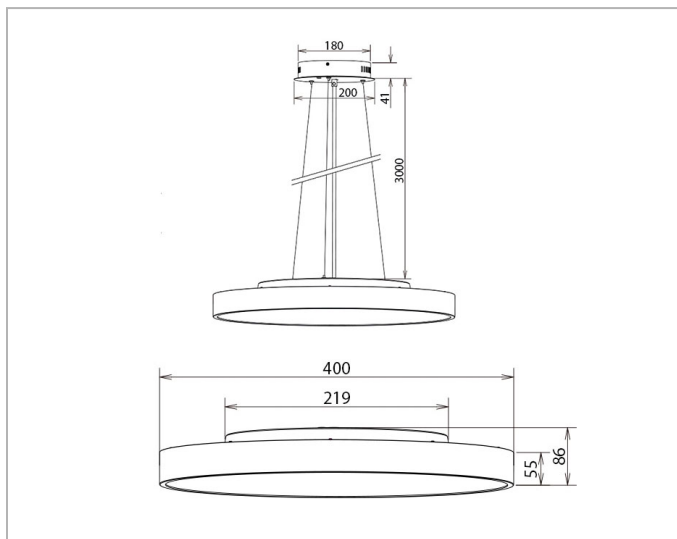

### Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)