




Description

UCL, suspension luminaire round, LED 18W, color changeable 3000K/4000K, 220-240VAC TRIAC, CRI80, 120°, Ø320mm, high 64mm, incl. internal driver, IP54, white


General data

Colour housing:	White
Degree of protection (IP):	IP54
Material housing:	Plastic
Protection class:	II
With suspension:	Yes

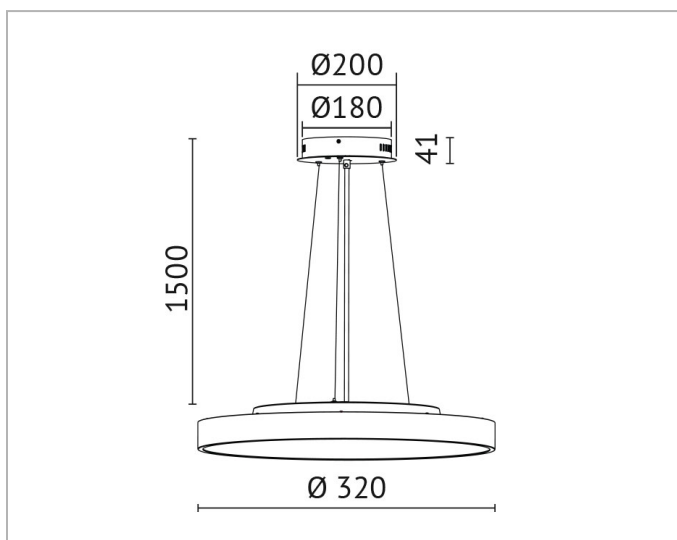


Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	2700K - 4000K
Colour temperature adjustable:	Positions
Light outlet:	Direct/indirect
Light sharing:	Symmetric
Luminaire efficacy:	68lm/W
Max. system power:	17W
Rated luminous flux according to IEC 62722-2-1:	1154lm
Suitable for number of lamps:	2
Unified Glare Ratio (UGR):	22.80

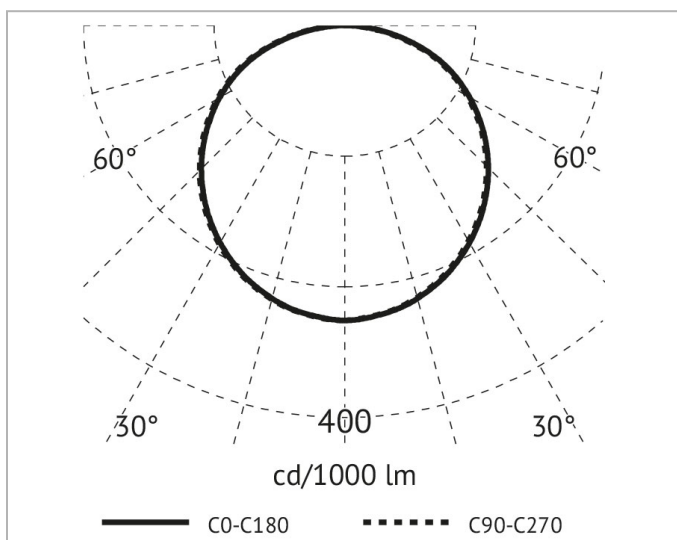

Electrical data

Dimming phase cut-off:	Yes
Dimming phase cut-on:	Yes
Exchangeable control gear:	Yes
Impact strength:	IK06
Nominal voltage:	220V - 240V



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Pendant luminaire



UCL-18SWNW31TD



Voltage type: AC
With control gear: Yes

Product dimensions

Diameter: 320mm
Height/depth: 64mm
Pendant length: 1500mm

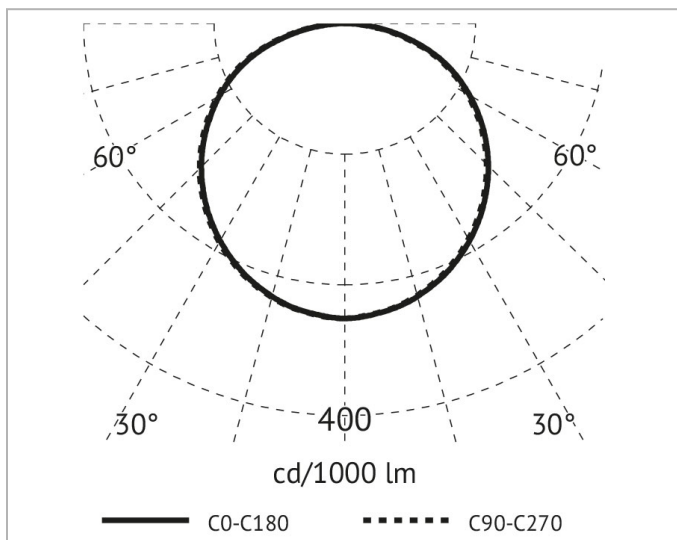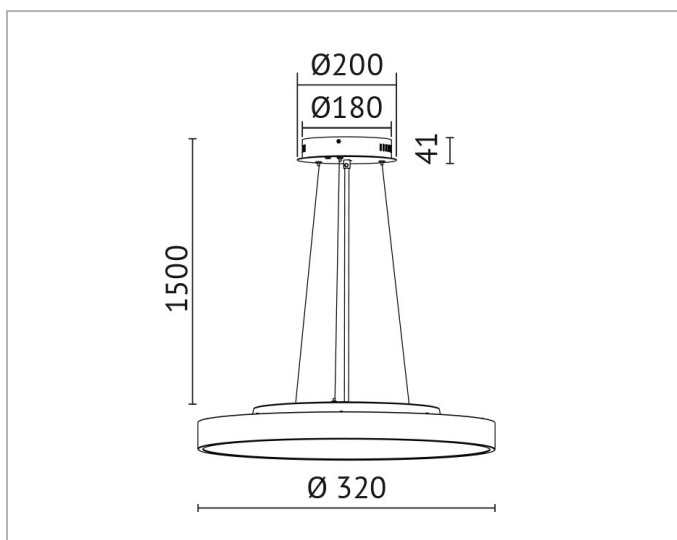

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de