
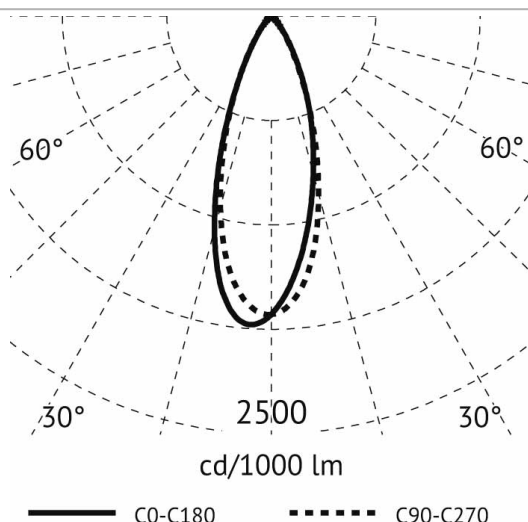


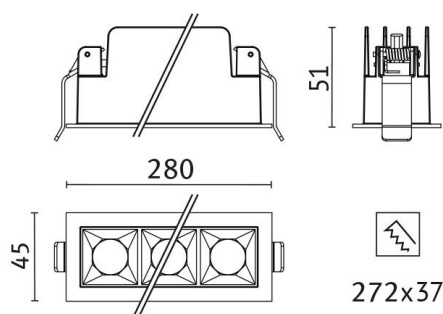

Description

LED linear recessed luminaire, 25W, 2700K, 36° reflector pearl black, 200-240VAC, CRI>90, IP20, triac dimmable, IP20, housing black color

General data

Adjustability:	Not adjustable
Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	II
Suitable for built-in mounting:	Yes

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	2700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	52lm/W
Luminous flux:	1310lm
Max. system power:	25W
Rated luminous flux according to IEC 62722-2-1:	1310lm
Suitable for number of lamps:	1
Suitable for workplace according to EN 12464-1:	Yes
Unified Glare Ratio (UGR):	15.1

Electrical data

Dimming phase cut-on:	Yes
------------------------------	-----



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Exchangeable control gear:

Yes

Nominal voltage:

220V - 240V

Voltage type:

AC

With control gear:

Yes

Product dimensions

Built-in height/depth:

51mm

Built-in length:

272mm

Built-in width:

37mm

Height/depth:



51mm

Length:

280mm

Width:

45mm

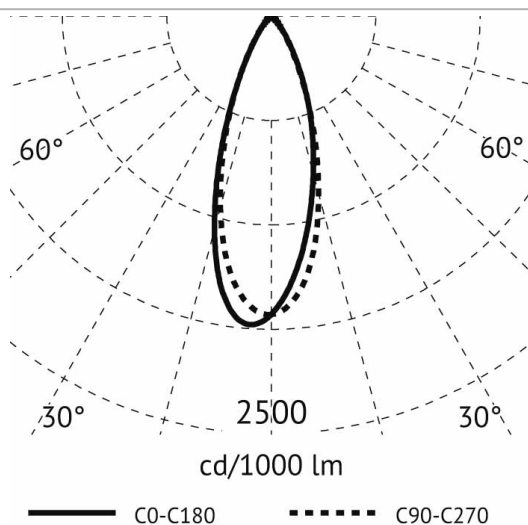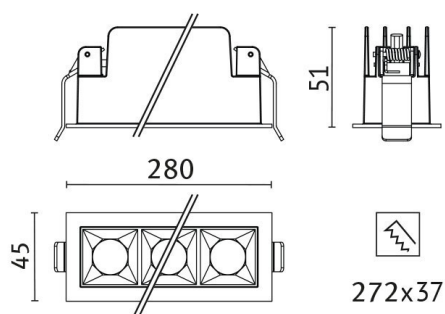

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de