
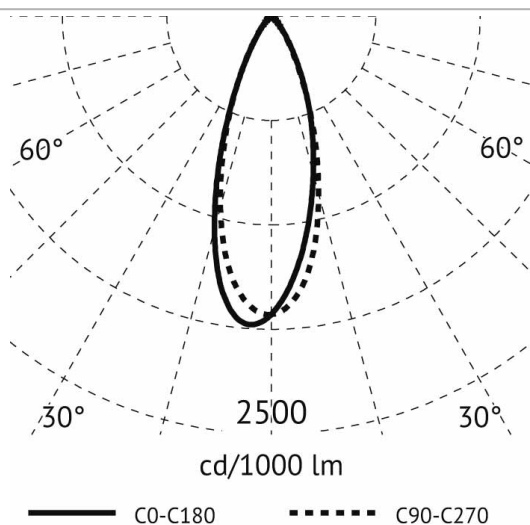


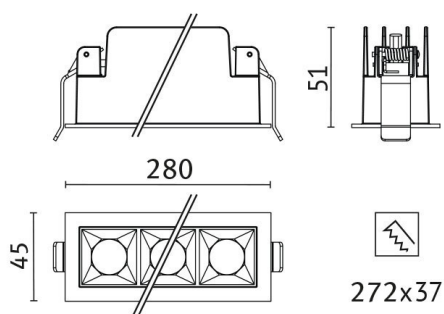

## Description

LED linear recessed luminaire, 25W, 3000K, 36° reflector pearl black, 200-240VAC, CRI>90, IP20, triac dimmable, IP20, housing white color

## General data

|                                        |                |
|----------------------------------------|----------------|
| <b>Adjustability:</b>                  | Not adjustable |
| <b>Colour housing:</b>                 | Black          |
| <b>Degree of protection (IP):</b>      | IP20           |
| <b>Lamp holder:</b>                    | None           |
| <b>Material housing:</b>               | Aluminium      |
| <b>Protection class:</b>               | II             |
| <b>Suitable for built-in mounting:</b> | Yes            |

## Photometric data

|                                                        |                    |
|--------------------------------------------------------|--------------------|
| <b>Beam angle:</b>                                     | Medium beam 21-40° |
| <b>Colour of light:</b>                                | White              |
| <b>Colour rendering index CRI:</b>                     | 90-100             |
| <b>Colour temperature:</b>                             | 3000K              |
| <b>Light outlet:</b>                                   | Direct             |
| <b>Light sharing:</b>                                  | Symmetric          |
| <b>Luminaire efficacy:</b>                             | 57lm/W             |
| <b>Luminous flux:</b>                                  | 1420lm             |
| <b>Max. system power:</b>                              | 25W                |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 1420lm             |
| <b>Suitable for number of lamps:</b>                   | 1                  |
| <b>Suitable for workplace according to EN 12464-1:</b> | Yes                |
| <b>Unified Glare Ratio (UGR):</b>                      | 15.3               |

## Electrical data

|                              |     |
|------------------------------|-----|
| <b>Dimming phase cut-on:</b> | Yes |
|------------------------------|-----|



## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
 Mastorter Str. 31 | 88069 Tettnang (Germany)  
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
 E-Mail: info@als.de | Web: www.als.de



**Exchangeable control gear:**

Yes

**Nominal voltage:**

220V - 240V

**Voltage type:**

AC

**With control gear:**

Yes

**Product dimensions**

**Built-in height/depth:**

51mm

**Built-in length:**

272mm

**Built-in width:**

37mm

**Height/depth:**



51mm

**Length:**

280mm

**Width:**

45mm

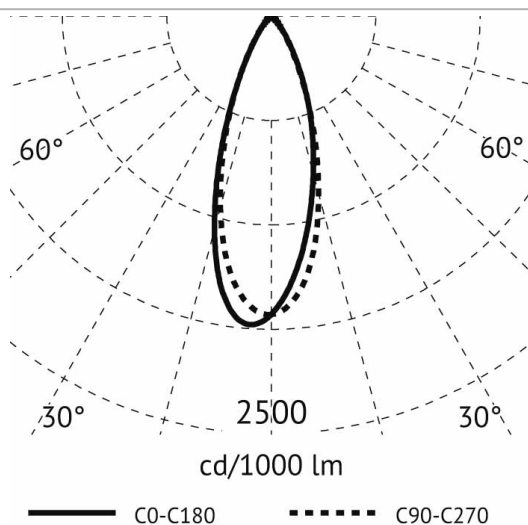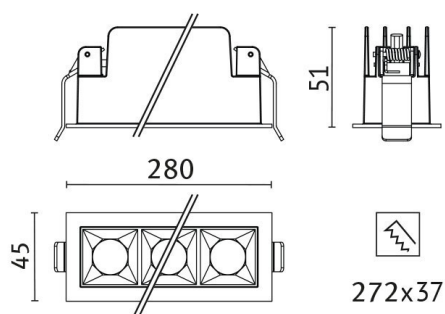

**Adress/Contact**

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)