
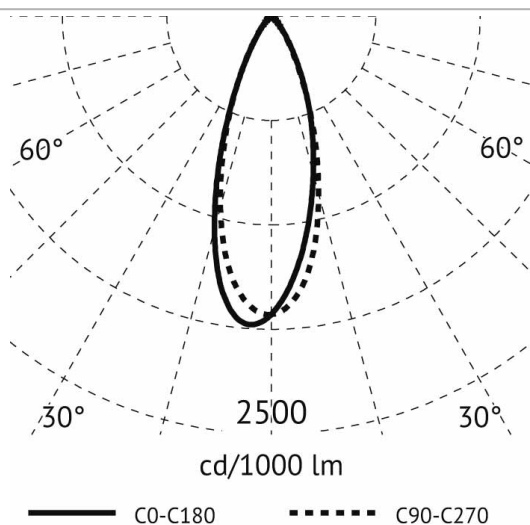


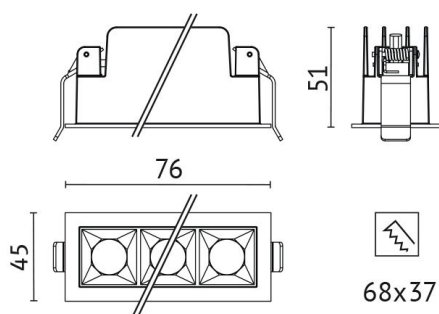

Description

LED linear recessed luminaire, 6W, 2700K, 36° reflector pearl black, 200-240VAC, CRI>90, IP20, triac dimmable, IP20, housing white color

General data

Adjustability:	Not adjustable
Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	II
Suitable for built-in mounting:	Yes

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	2700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	47lm/W
Luminous flux:	279lm
Max. system power:	6W
Rated luminous flux according to IEC 62722-2-1:	279lm
Suitable for number of lamps:	1
Suitable for workplace according to EN 12464-1:	Yes
Unified Glare Ratio (UGR):	14.8

Electrical data

Exchangeable control gear:	Yes
-----------------------------------	-----



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Built-in height/depth:	51mm
Built-in length:	68mm
Built-in width:	37mm
Height/depth:	51mm
Length:	76mm
Width:	45mm

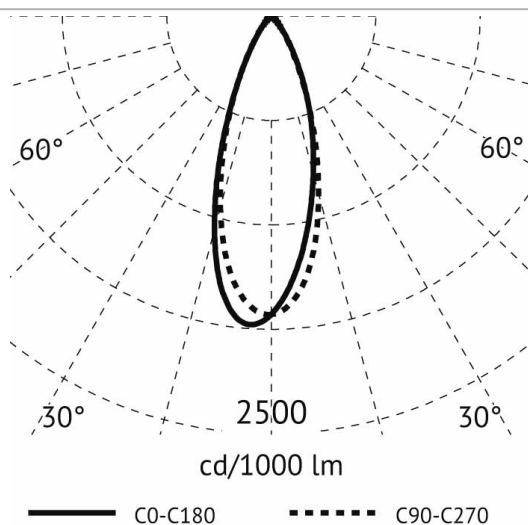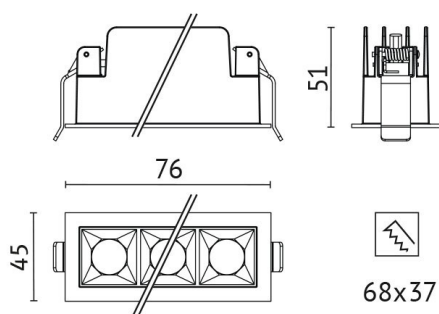

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de