
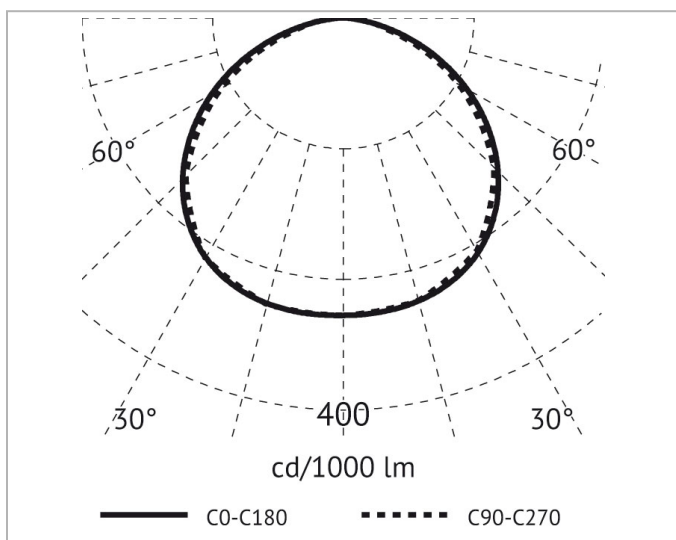


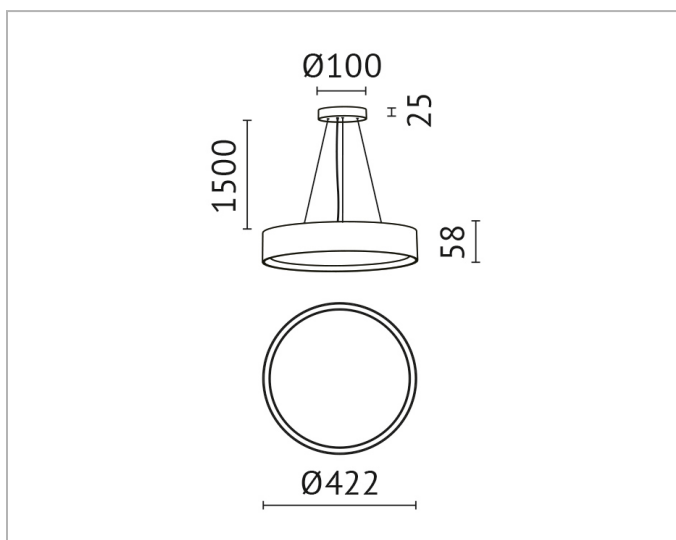

Description

UMD, Wall-/Ceiling luminaire round, LED 30W, color changeable 3000K/4000K, 220-240AC, 370mA, CRI80, 120°, Ø422mm, height 58mm, incl. Triac driver, opal PMMA diffuser, IP44, white

General data

Colour housing:	Black
Degree of protection (IP):	IP44
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K - 4000K
Colour temperature adjustable:	Positions
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	94lm/W
Max. system power:	30W
Rated luminous flux according to IEC 62722-2-1:	2812lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	22.35

Electrical data

Dimming phase cut-off:	Yes
Exchangeable control gear:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Pendant luminaire

UMD-30WWNW32-4TD



With control gear:

Yes

Product dimensions

Diameter:



422mm

Height/depth:

58mm

Pendant length:

1500mm

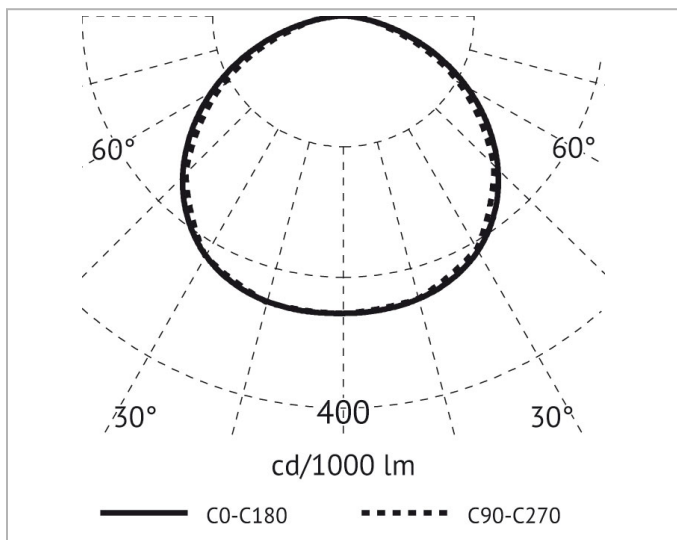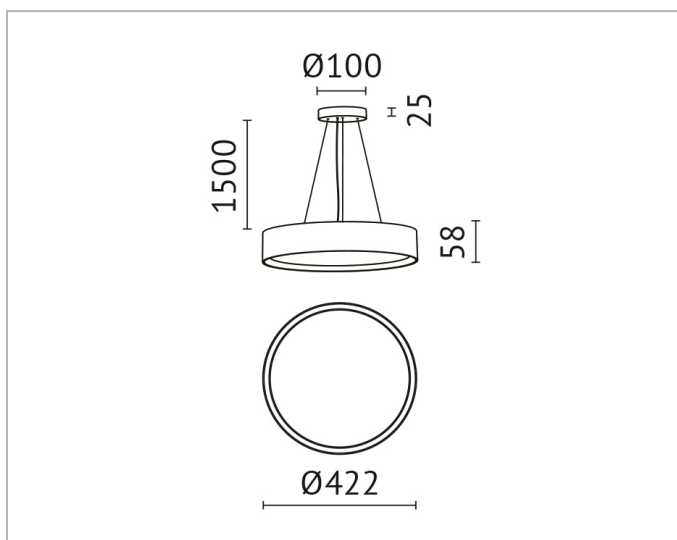

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de