
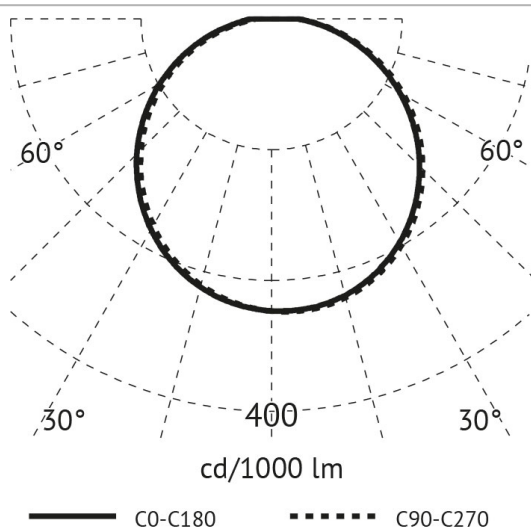


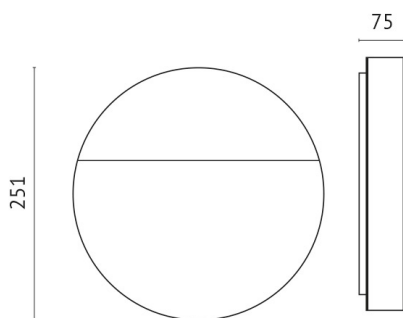

Description

UWAL, Outdoor luminaire, LED 12W, CRI80, 200-240V AC TRIAC, Ø251x75mm, incl. internal LED driver, switchable between 3000K/4000K/5700K, eyelid trim, IK08, IP65, black

General data

Colour housing:	Black
Degree of protection (IP):	IP65
Material housing:	Aluminium
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K - 5700K
Colour temperature adjustable:	Positions
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	45lm/W
Max. system power:	12W
Rated luminous flux according to IEC 62722-2-1:	534lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	21.50

Electrical data

Dimming phase cut-off:	Yes
-------------------------------	-----



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Exchangeable control gear:

Yes

Impact strength:

IK08

Nominal voltage:

230V - 240V

Voltage type:

AC

With control gear:

Yes



Product dimensions

Height/depth:

75mm

Outer diameter:

251mm

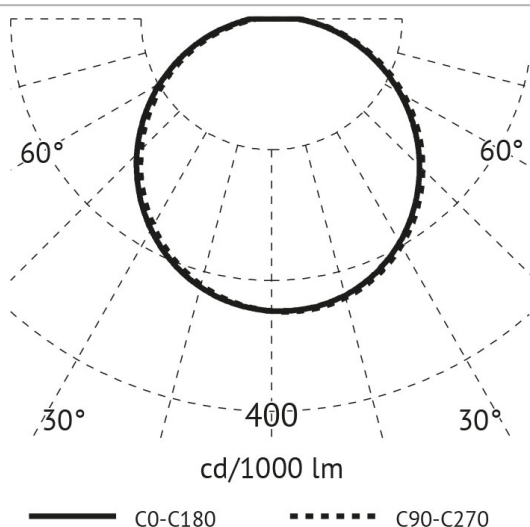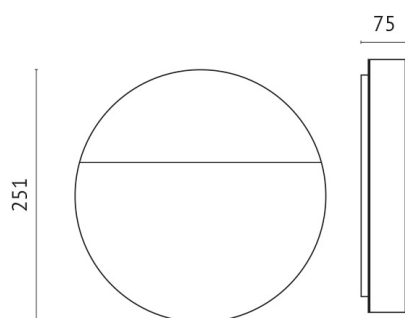

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de