
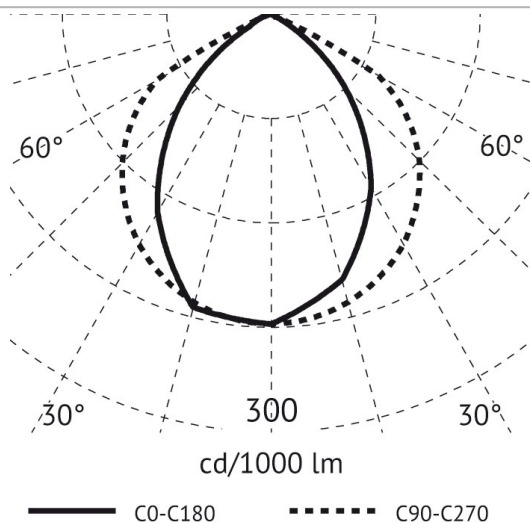


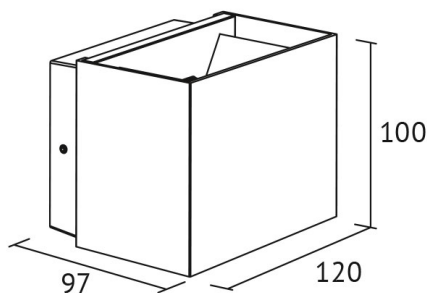

Description

UWL, wall mounted light, LED 10W, CRI>80, 230V, 3000K, bidirectional light emission, beam angle adjustable from 15°-120°, incl. driver, IP65, anthracite color

General data

Colour housing:	Anthracite
Degree of protection (IP):	IP65
Material housing:	Aluminium
Protection class:	I
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Beam angle:	Variable beam angle
Beam angle adjustable:	Continuously variable
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	83lm/W
Max. system power:	10W
Rated luminous flux according to IEC 62722-2-1:	832lm
Suitable for number of lamps:	2

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC





Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Product dimensions

Height/depth:	97mm
Length:	120mm
Width:	100mm

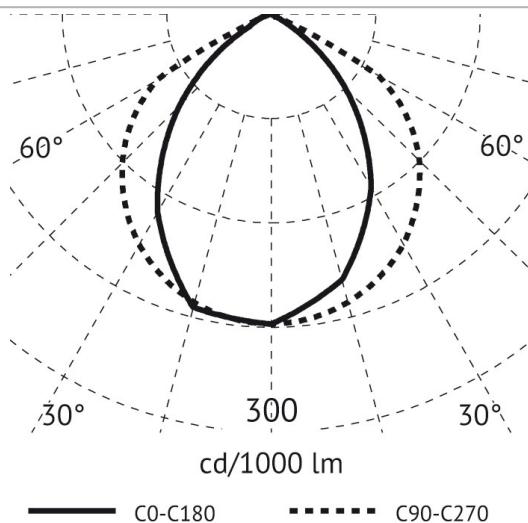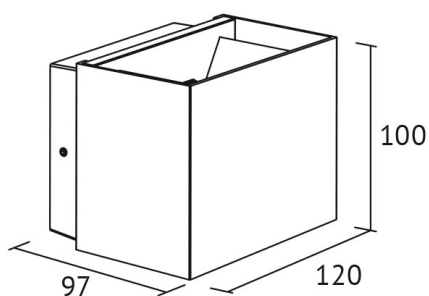

Adress/Contact