




Description

VAM1 pendant luminaire, 1 light, 1x9W, 2700K, CRI>90, UGR<16, beam angle 60°, incl. TRIAC dim power supply unit, chrome


General data

Colour housing:	Chrome
Degree of protection (IP):	IP20
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

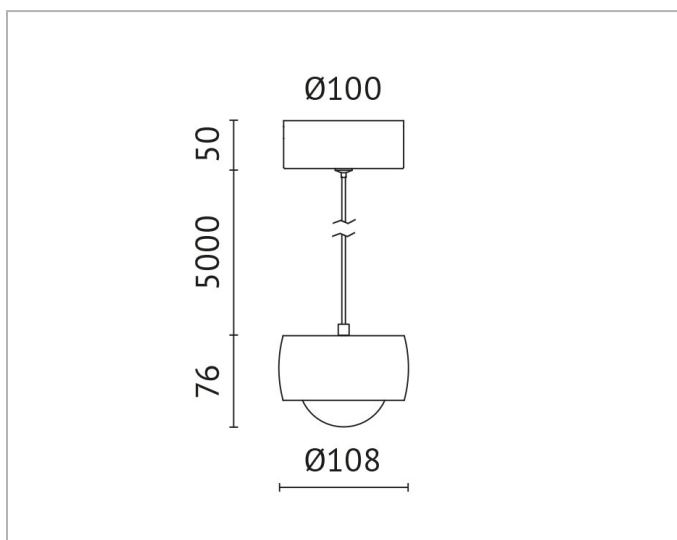

Photometric data

Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	2700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	65lm/W
Max. system power:	9W
Rated luminous flux according to IEC 62722-2-1:	588lm
Suitable for number of lamps:	1
Suitable for workplace according to EN 12464-1:	Yes
Type of grid:	None
Unified Glare Ratio (UGR):	10,00

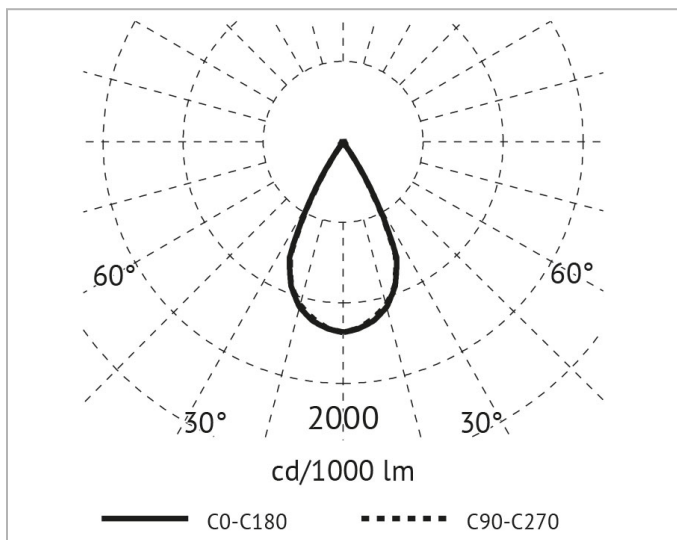

Electrical data

Dimming phase cut-off:	Yes
Exchangeable control gear:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



With control gear:

Yes

Product dimensions

Diameter:



108mm

Height/depth:

76mm

Pendant length:

5000mm

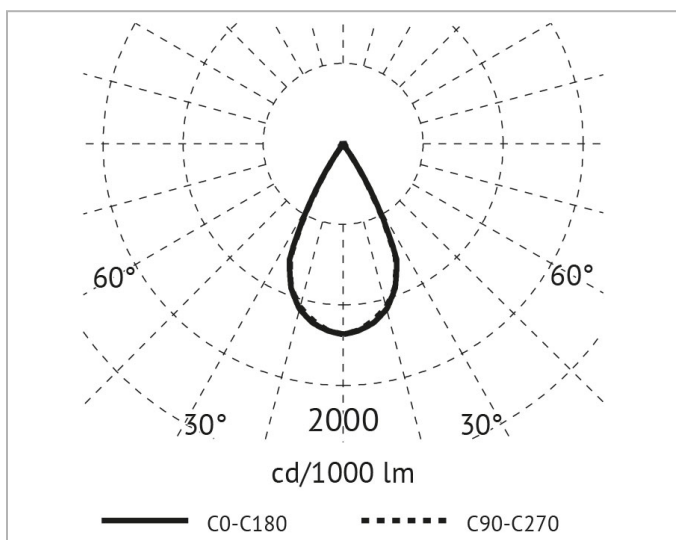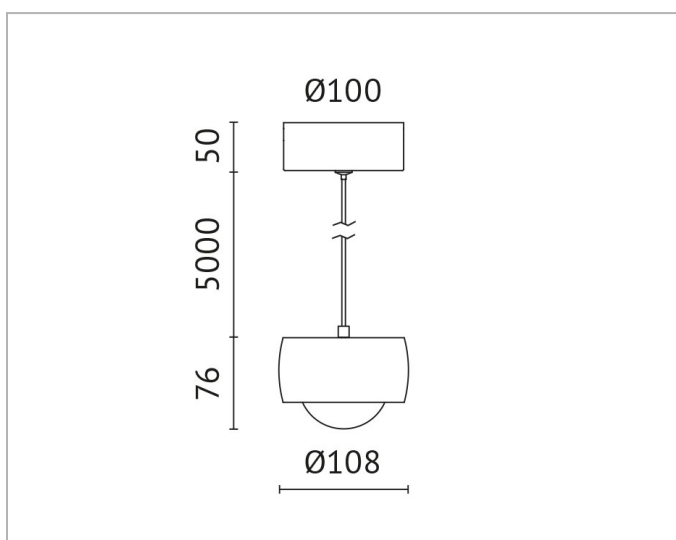

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de