




- LED Pendelleuchte
- Leuchtenkörper aus Aluminium
- UGR<19
- Schutzart: IP20
- Schutzklasse: I
- Elektronisches Versorgungsteil
- TRIAC DIM

- LED pendant luminaire
- Aluminium housing
- UGR<19
- Protection Rating: IP20
- Protection Class: I
- Electronic power supply
- TRIAC DIM

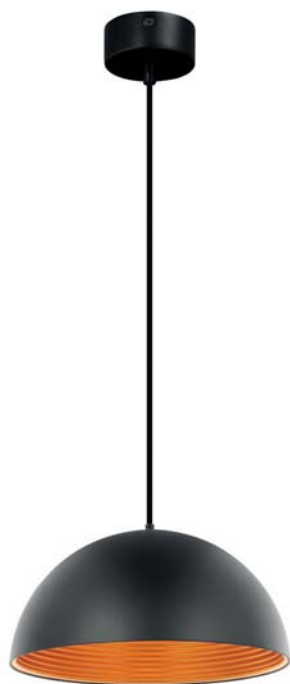

VHL




LED Pendelleuchte mit Baldachin

LED pendant luminaire with canopy

⚡ 100° / AC220-240V / UGR<19 / CRI>80 / TRIAC DIM

Ø300 mm, H150 mm	14 W	Ø400 mm, H200 mm	25 W
4000 K ● VHL-15NW300D	984 lm	4000 K ● VHL-25NW400D	1650 lm

Kabellänge (kürzbar): L5000 mm | Cable length (can be shortened): L5000 mm



● Schwarz/Gold | Black/Rose gold

