




Description

Pendant luminaire, 25W, 4000K, CRI>80, UGR<19, beam angle 100°, shade Ø 400mm, H=200mm, 5000mm suspension (can be shortened), incl. Triac dim power supply unit, black surface, gold interior


General data

Colour housing:	Black
Degree of protection (IP):	IP20
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

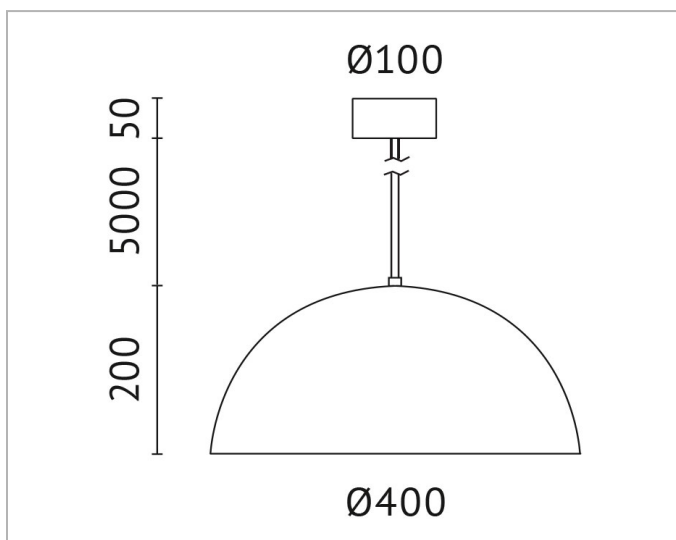

Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	66lm/W
Max. system power:	25W
Rated luminous flux according to IEC 62722-2-1:	1650lm
Suitable for number of lamps:	1
Type of grid:	None
Unified Glare Ratio (UGR):	16,30

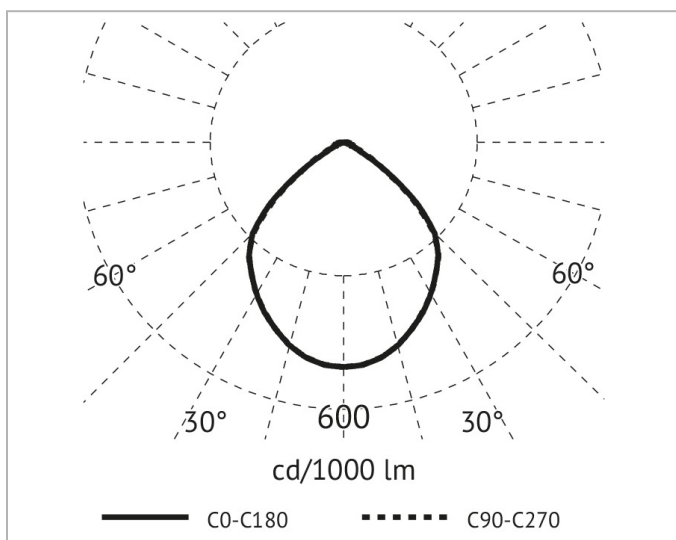

Electrical data

Dimming phase cut-off:	Yes
Exchangeable control gear:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Pendant luminaire

VHL-25NW400D



Product dimensions

Diameter:	400mm
Height/depth:	200mm
Pendant length:	5000mm

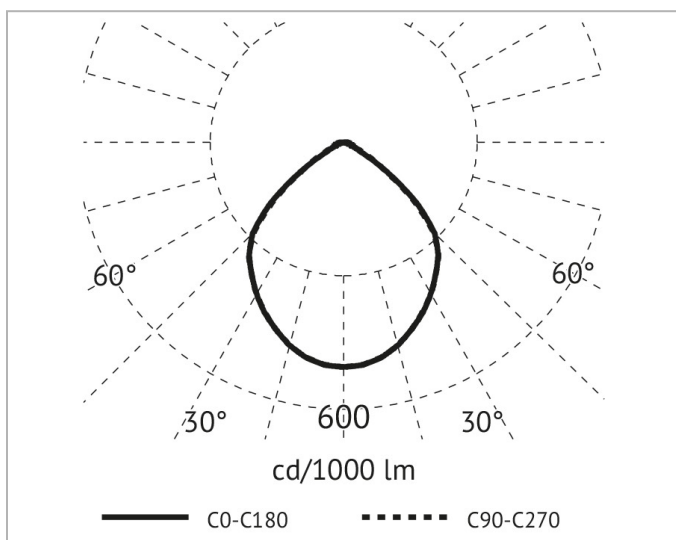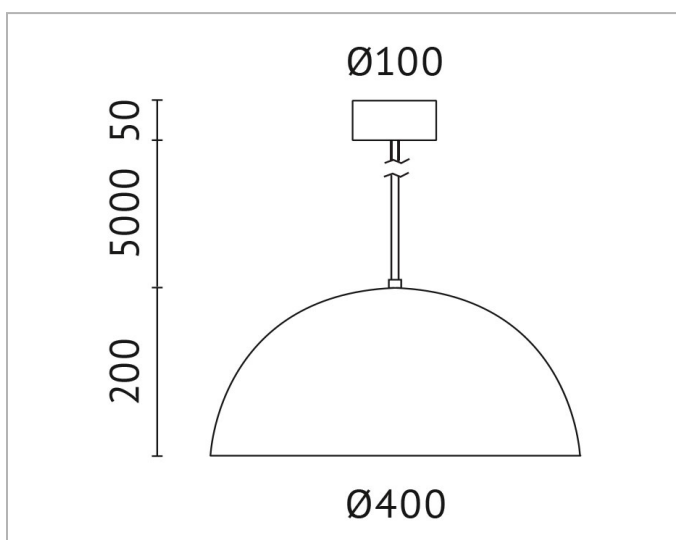

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de