
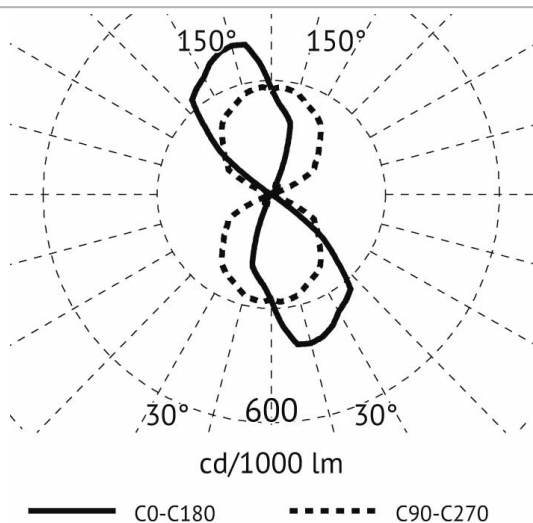




Description

1308AG4K Wash 22 wall mounted light fitting, asymmetric reflector suitable to double position, LED 2x11W, 4000K, neutral white, up + down light, IK08, IP 65, CRI 80, die-cast aluminium alloy housing, ultra-white milled clear glass, Driver inside 230V/50Hz/350mA, aluminiumgrey

General data

Colour housing:	Grey
Degree of protection (IP):	IP65
Material housing:	Aluminium
Protection class:	I
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct/indirect
Light sharing:	Symmetric
Max. system power:	22W

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC

Product dimensions

Height/depth:	116mm
Length:	222mm
Width:	100mm



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de