
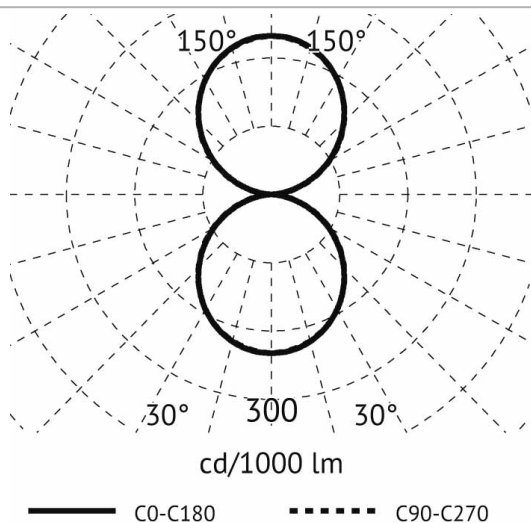


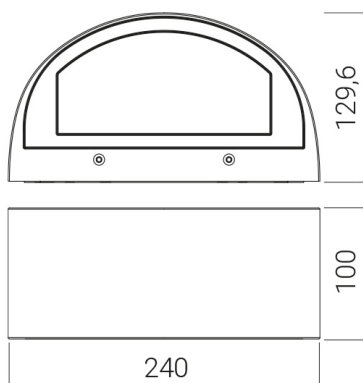

## Description

1321GR4K WASH 24 LED, wall mounted light fitting, LED 2x9W, 4000K, aluminium die cast, up + down light, CRI 80, IP65, IK08, with built in driver, anthracite

## General data

|                                       |            |
|---------------------------------------|------------|
| <b>Colour housing:</b>                | Anthracite |
| <b>Degree of protection (IP):</b>     | IP65       |
| <b>Material housing:</b>              | Aluminium  |
| <b>Protection class:</b>              | I          |
| <b>Suitable for surface mounting:</b> | Yes        |
| <b>Suitable for wall mounting:</b>    | Yes        |

## Photometric data

|                                                        |                        |
|--------------------------------------------------------|------------------------|
| <b>Beam angle:</b>                                     | Extreme wide beam >80° |
| <b>Colour of light:</b>                                | White                  |
| <b>Colour rendering index CRI:</b>                     | 80-89                  |
| <b>Colour temperature:</b>                             | 4000K                  |
| <b>Light outlet:</b>                                   | Direct                 |
| <b>Light sharing:</b>                                  | Symmetric              |
| <b>Luminaire efficacy:</b>                             | 75lm/W                 |
| <b>Max. system power:</b>                              | 18W                    |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 1348lm                 |
| <b>Suitable for number of lamps:</b>                   | 2                      |

## Electrical data

|                                   |      |
|-----------------------------------|------|
| <b>Exchangeable control gear:</b> | Yes  |
| <b>No dim function:</b>           | Yes  |
| <b>Nominal voltage:</b>           | 230V |
| <b>Voltage type:</b>              | AC   |





## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
 Mastorter Str. 31 | 88069 Tettnang (Germany)  
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
 E-Mail: info@als.de | Web: www.als.de



**Product dimensions**

|                      |         |
|----------------------|---------|
| <b>Height/depth:</b> | 129.6mm |
| <b>Length:</b>       | 240mm   |
| <b>Width:</b>        | 100mm   |

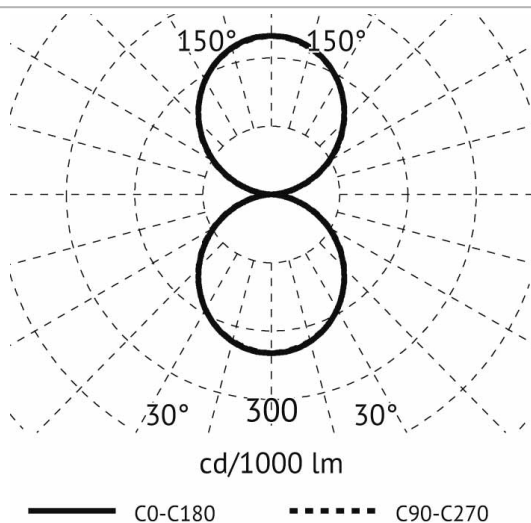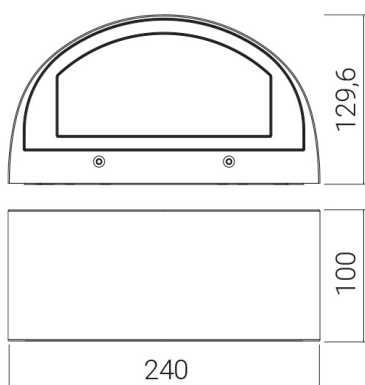

**Adress/Contact**