

DESCRIPTION OF PARTS

Linear LED pendant light with glass light fitting Ø100xL250 mm with canopy, glass with motive, white, black or chrome finish

TECHNICAL DATA

LED incl. driver
AC220-240V
Output: 5x 7W
Light temperature: 3000K
IP class 20
Protection class: I
Wire suspension: L6000 mm (shortenable)
Dimmbale TRIAC
Dimension canopy: L113xB60xH35 mm


LIGHT SOURCE

Light source: A.L.S. GmbH - EP830996-1-5WW1
This luminaire contains 5 light sources of energy efficiency class E
The light source is only exchangeable by a professional.


LED DRIVER

Voltage: 220-240V / 50 Hz

The product consists of three components. Luminaire with light source and external LED driver in the canopy, glass sphere with motive.



The light source is only exchangeable by a professional.



The LED driver is only exchangeable by a professional.



Protection class I



Notification of Risks



CE mark



Safety Instructions



The product is only for use in interiors.



Cleaning Instructions



The product may not be disposed of in the household garbage.



It is not allowed to cover luminaires with heatinsulating cover sheet or similar materials!



Do not attach deco material.



Installation only by qualified and authorised persons.



Dimmable TRIAC



Keep foil packaging away from small children, risk of suffocation.

SAFETY



READ THE INSTRUCTIONS BEFORE USING THIS PRODUCT. KEEP THE SAFETY AND OPERATING INSTRUCTIONS FOR FUTURE USE.

SAFETY INFORMATION



- The light is suitable for lighting purpose indoors.
- The luminaire is not suitable for mounting on uneven surfaces, soffboard. The light may otherwise fall. This can result in product damage and / or injuries. **Check the mounting surface and adjust the mounting material to the ground.**



- Do not let children play with the packaging film. Children can get caught up in it and suffocate while playing.



- Don't install under power.
- Follow the instruction manual for installation.
- Installation only by qualified and authorised persons.



- Do not use the product when it has been damaged (defective covers) or there are operational faults such as flickering, smoking, steaming, crackling noises or the smell of smoke.
- A damaged or defective product must be changed or repaired by the manufacturer, a service person or a comparable qualified person.
- Installation only under observance of the valid guidelines specific to application and country among others VDE 0.100.
- Never open one of the electrical operating agents or plug any objects into them. Such procedures signify a danger to life through electrical shock.
- Absolutely avoid contact between the product and water or other liquids. For reasons of electrical safety, the light may not be placed in contact with water or other liquids or submerged in water.
- The product may not be changed or modified.
- Make sure that the luminaire is never covered by heat insulating mats or thin materials. Make sure that the product has enough space for heat dissipation.
- Keep foil packaging away from small children,



MAINTENANCE AND CLEANING

The light source is only exchangeable by a professional.



- Do not use solvents, such as benzene and similar agents. The light would be damaged thereby.
- Only use a dry, lint-free cloth for cleaning the product.

DISPOSAL

The packaging consists of environmentally friendly materials. Dispose of them in the local recycling containers.




Do not dispose of this product in the household garbage when it has reached the end of its lifecycle, but rather take it to a disposal center. Your local officials will provide you with information about collection offices and their business hours.

LLP

Pendant luminaire

LLP-5L-WW1
LLP-5L-WW2
LLP-5L-WW3

ALS
ARCHITEKTONISCHE
LICHT
SYSTEME

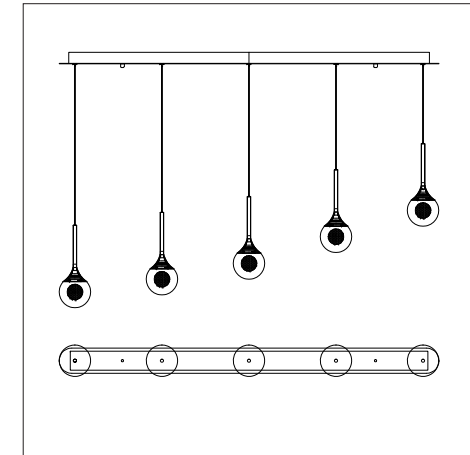

White

Black

Chrome



INTENDED USAGE

This product will only serve the purpose of illumination.

The light is only suitable for use in interiors, in dry, enclosed rooms.

SCOPE OF DELIVERY

1 x LED luminaire with fastening material and crimp twist terminal
1 x Converter
1 x set of instructions for assembly, operation and safety

This luminaire is not a toy for children!

Do not let children play with it unsupervised, injuries could result. The motif in the crystal glass ball is made with a special technique and can not be replaced or changed.

Small air inclusions (air bubbles) in the glass ball are due to the process of glass production and represent a unique specimen.

address | contact

A.L.S. GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
Tel.: +49 (0) 75 42 93 44-0 | Fax.: +49 (0) 75 42 93 44-30
E-Mail: info@als.de | Web: www.als.de

Version: 2024-08-09

EN



01 Turn off power supply before starting any installation. Do not connect the device under power.

02 Check the ceiling mounting location for load-bearing capacity (the luminaire is very heavy)

Preparation for installation:

03 Before drilling, check the surface for underlying installations.

04 Remove the mounting rail from the housing.

05 Attach the mounting rail to the ceiling using wall plugs and screws. Check that the mounting and holding device is secure.

06 Guide the connecting cables of the glass holder through the grippers on the canopy.

07 By pressing down the spring-loaded grippers on the canopy, the connecting cables can be pushed through more easily and the pendant height can be adjusted.


08 Connect the individual white wires in parallel with the brown wire from the LED Driver and the black wires in parallel with the blue wire from the LED Driver. Connect the mains supply cable in accordance with VDE 0-100,

09 Attach the canopy with the pendant lights **WITHOUT glass balls** to the mounting bracket/rail. Check the tight fit of the canopy.

10 Carefully remove the glass balls from the packaging using the protective bag.

11 Carefully screw the threaded ring of the glass ball to the pendulum in a clockwise direction.

Place the glass balls on a soft, secure surface for cleaning.


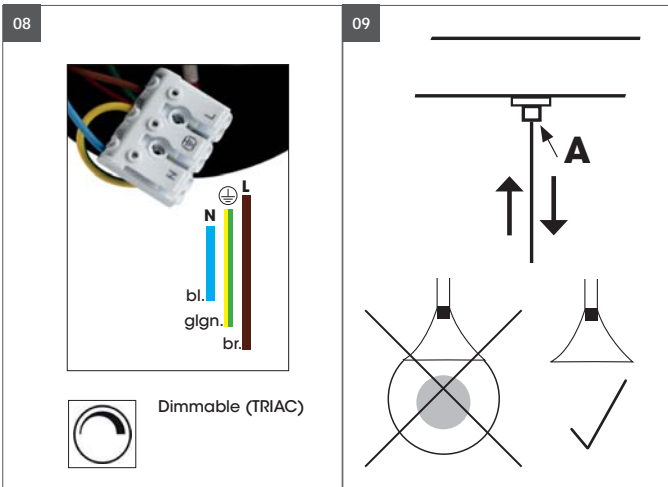


Note on adjusting the pendulum height

The pendulum height on the canopy must be adjusted **before** the glass globes are screwed on. This is done by pressing in the cable outlet pin (A).

12 Slowly lower the glass balls and slowly tension the cable pendulum.

Caution! The glass balls must not touch each other when swinging out!

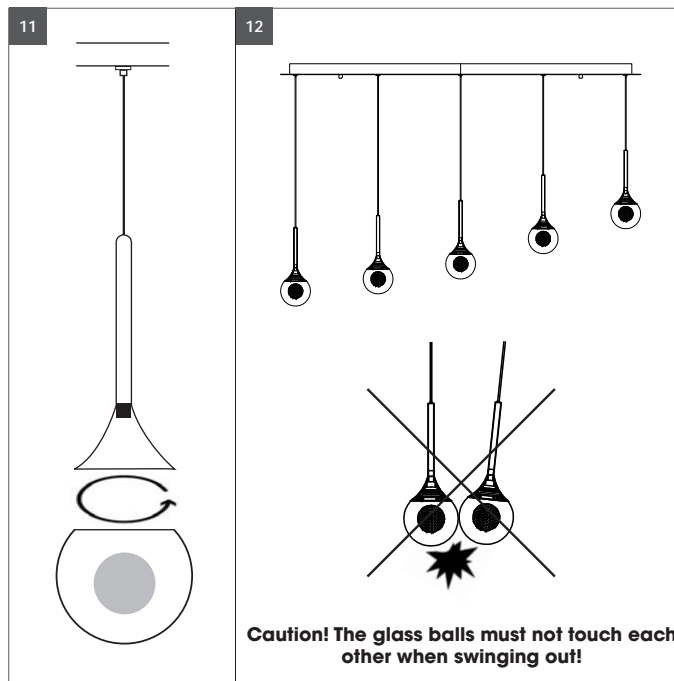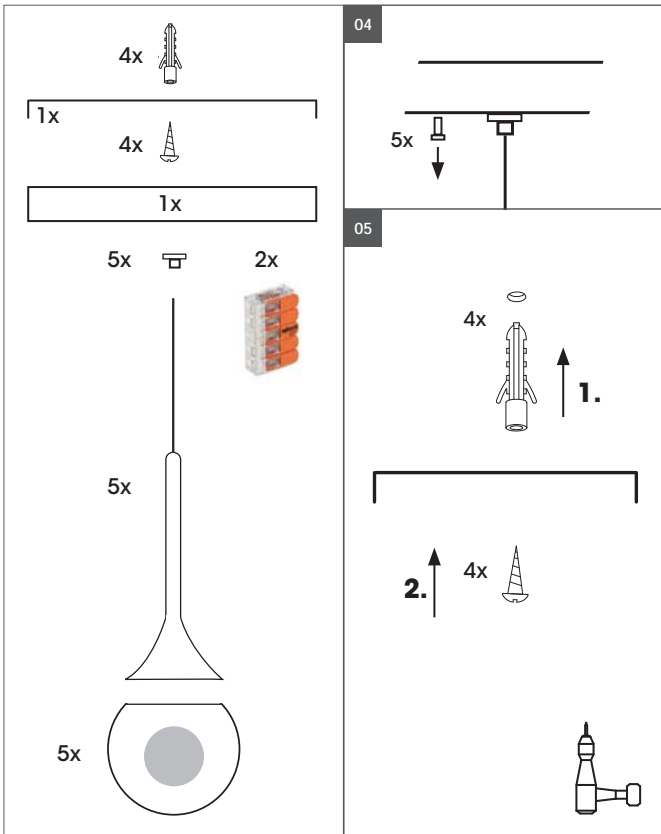

13 Tighten the screws on the canopy again.



The glass ball luminaire must not be covered with heat-insulating material!

Additional drillings in the LED luminaire are not allowed!

Another installation / assembly / materials / types than provided in the manual sheets, release us from any electrotechnical and electrostatic responsibility.

Fixing materials:

The warranty is void if the buyer or a third party repairs or modifies the luminaire.

